


**K-750***Gasdruckfeder*

8

Grün
Blau
Rot
Gelb
Schwarz




T: < 80 °C

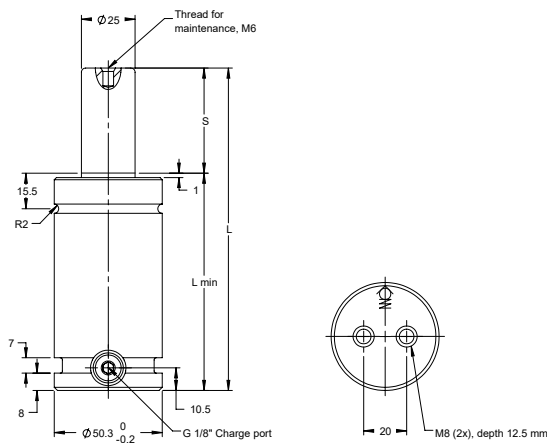 $S = \text{Hub}$

S1	S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
6	6	62	56	740	1500	0.68	0.010	K-750-6
13	12.7	75.4	62.7	740	1300	0.73	0.020	K-750-13
19	19	88.1	69.05	740	1200	0.80	0.030	K-750-19
25	25	100	75	740	1100	0.82	0.040	K-750-25
38	38.1	126.2	88.1	740	1100	0.92	0.060	K-750-38
50	50	150	100	740	1100	1.06	0.080	K-750-50
64	63.5	177	113.5	740	1100	1.12	0.10	K-750-64
80	80	210	130	740	1100	1.26	0.12	K-750-80
100	100	250	150	740	1100	1.39	0.15	K-750-100
125	125	300	175	740	1100	1.57	0.19	K-750-125

EINBAUVARIANTEN

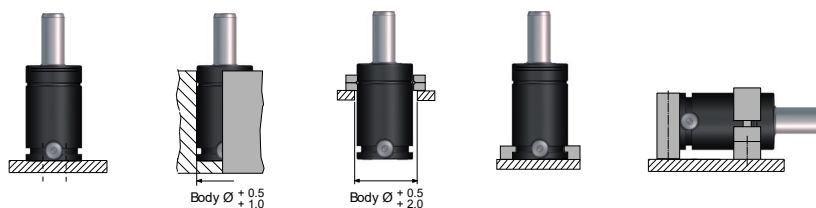

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 15 - 40
Instandhaltungssatz	3017230-0750