




SN2811-C-4300

Gasdruckfeder Extra Power

Gas spring Extra Power

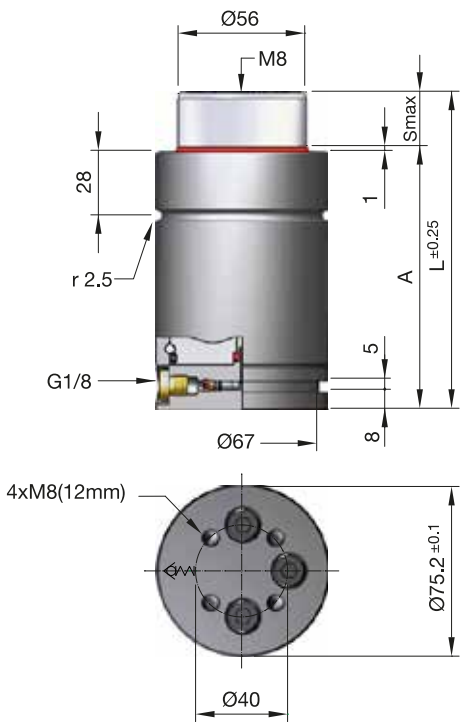


max 80° C



S	A	L	bar	daN1	daN2	Fa	kg	V (l)	Order No.
12	102	114	175	4300 (± 5%)	5800	24.63	2.32	0.115	SN2811-C-4300-12
25	115	140	175	4300 (± 5%)	6680	24.63	2.60	0.174	SN2811-C-4300-25
38	132	170	175	4300 (± 5%)	6965	24.63	2.92	0.246	SN2811-C-4300-38
50	145	195	175	4300 (± 5%)	7265	24.63	3.11	0.303	SN2811-C-4300-50
63	167	230	175	4300 (± 5%)	7135	24.63	3.20	0.392	SN2811-C-4300-63
80	190	270	175	4300 (± 5%)	7225	24.63	4.05	0.489	SN2811-C-4300-80

EINBAUVARIANTEN/ INSTALLATION VARIANTS

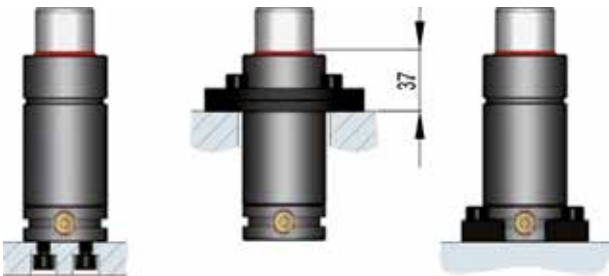



SN2811-C-4300

Gasdruckfeder Extra Power

Gas spring Extra Power

8

Druckmedium	Pressure medium	N2
Max. Fülldruck	Max. filling pressure	175 bar
Min. Fülldruck	Min. filling pressure	35 bar
Max. Betriebstemperatur	Max. working temperature	80 °C
Temperaturabhängige Druckerhöhung	Pressure increase due to temperature	0,33 %/1 °C
Instandhaltungsset	Maintenance kit	SN2990-HC4300
Max. Kolbengeschwindigkeit	Max. piston speed	25 m/min

