



Blindkupplungen

Blind sockets

Couplages aveugle



Z7705-

Mat.: Ms
°C ≈ -15/+200

 Z7705-Type




| Type | D | d4 | L |
|------|----|------|----|
| 5 | 18 | 9 | 30 |
| 15 | 23 | 13,5 | 37 |
| | | | |
| | | | |

Schnellkupplungen

Quick release couplings

Raccords rapides

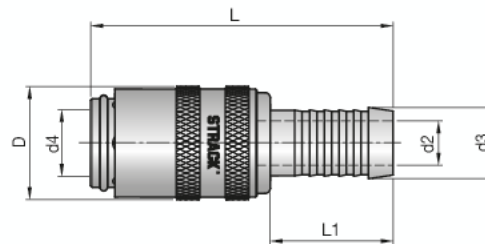





Z7706-

Mat.: Ms (Viton)
°C ≈ -15/+200

 Z7706-Type



| Type | D | L | d2 | d3 | d4 | L1 | bar | |
|------|----|------|----|------|------|------|-----|---|
| 5 | 18 | 53 | 7 | 10,5 | 9,0 | 22,5 | 15 |  |
| 15 | 23 | 61,5 | 9 | 14,5 | 13,5 | 25 | 10 |  |
| 10 | 18 | 53 | 7 | 10,5 | 9,0 | 22,5 | 15 |  |
| 20 | 23 | 61,5 | 9 | 14,5 | 13,5 | 25 | 10 |  |
| | | | | | | | | |