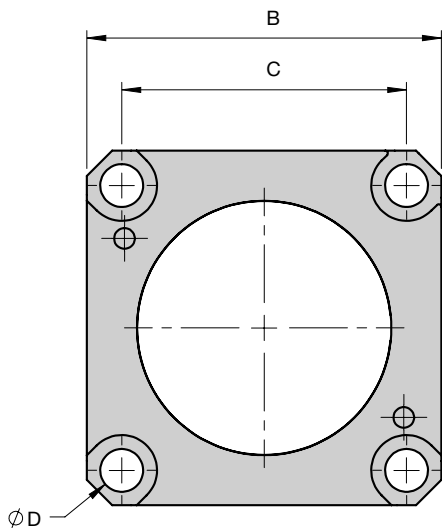




FCSC
 Flange


2


 Mat.: St
 Norm: ISO 11901
 VDI 3003

 1 - Standard cap head
 2 - Low cap head (recommended)
 ** If standard screws are used

* Mounts to this model

Type	A	B	C	D	E	F	Order No.
1500	75	90	73.5	10.5	29	26.0	FCSC-1500
3000	95	110	92.0	12.5	33	30.0	FCSC-3000
5000	120	130	109.5	12.5	33 (CU4-11800)*, 36 (LCF-5000, SPC-3000, TL-5000, TU-5000, TUS-5000, TX-6600, X-6600, XG-6600)*	32.4	FCSC-5000
7500	150	162	138.0	16.5	38 (CU4-18300)*, 41 (LCF-7500, SPC-5000, TL-7500, TU-7500, TUS-7500, TX-9500, X-9500)*	38.0	FCSC-7500

NOTE:

The FCSC and FCS flanges are fully interchangeable if low head cap mounting screws (4x) are used. Using low head cap screws ensures the top of the screw is flush with the top of the flange. If normal head cap screws are used, the top of the screw will protrude from the top of the flange by 3 mm.