




SN2811-C-850

Gasdruckfeder Extra Power

Gas spring Extra Power

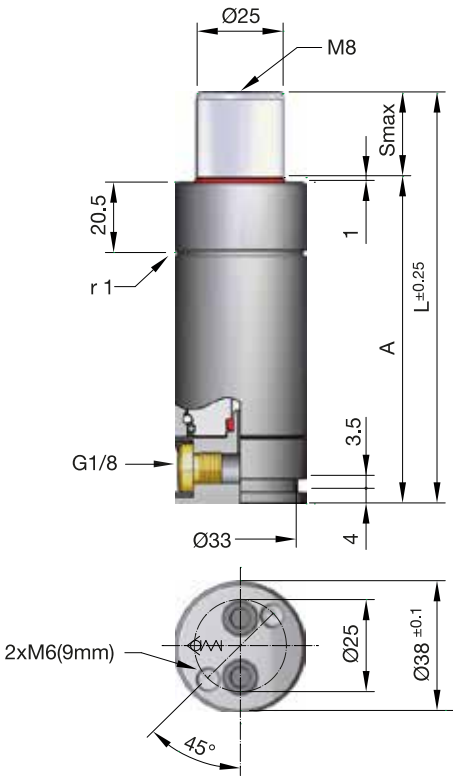


max 80° C



S	A	L	bar	daN1	daN2	Fa	kg	V (l)	Order No.
12	82	94	175	850 (± 5%)	1255	4.91	0.60	0.0190	SN2811-C-850-12
25	95	120	175	850 (± 5%)	1405	4.91	0.65	0.0310	SN2811-C-850-25
38	112	150	175	850 (± 5%)	1415	4.91	0.72	0.0470	SN2811-C-850-38
50	125	175	175	850 (± 5%)	1455	4.91	0.84	0.060	SN2811-C-850-50
63	142	205	175	850 (± 5%)	1450	4.91	0.95	0.076	SN2811-C-850-63
80	165	245	175	850 (± 5%)	1440	4.91	1.06	0.098	SN2811-C-850-80

EINBAUVARIANTEN/ INSTALLATION VARIANTS

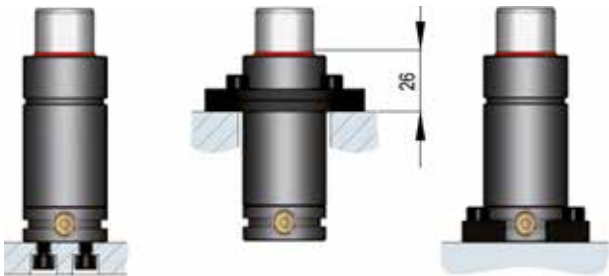



SN2811-C-850

Gasdruckfeder Extra Power

Gas spring Extra Power

8

Druckmedium	Pressure medium	N2
Max. Fülldruck	Max. filling pressure	175 bar
Min. Fülldruck	Min. filling pressure	35 bar
Max. Betriebstemperatur	Max. working temperature	80 °C
Temperaturabhängige Druckerhöhung	Pressure increase due to temperature	0,33 %/1 °C
Instandhaltungsset	Maintenance kit	SN2990-HC850
Max. Kolbengeschwindigkeit	Max. piston speed	25 m/min

