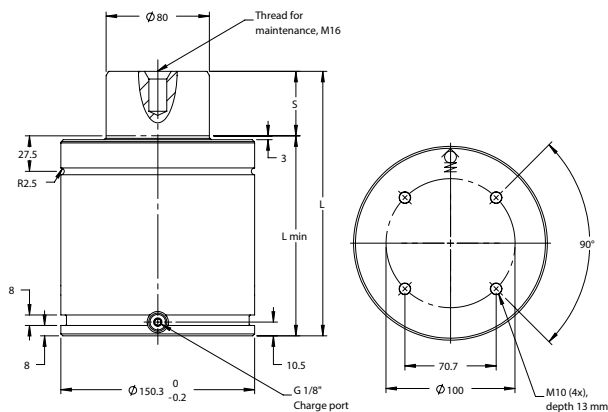



**TL-7500**
Gasdruckfeder

Grün
Blau
Rot
Gelb
Schwarz

 $S = \text{Hub}$ $T: < 80^{\circ}\text{C}$

S1	S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
25	25	155	130	7500	9990	13.60	0.60	TL-7500-25
38	37.5	180	142.5	7500	10410	14.50	0.70	TL-7500-38
50	50	205	155	7500	10680	15.40	0.90	TL-7500-50
63	62.5	230	167.5	7500	10870	16.30	1.00	TL-7500-63
75	75	255	180	7500	11010	17.20	1.30	TL-7500-75
80	80	265	185	7500	11560	17.50	1.40	TL-7500-80
88	87.5	280	192.5	7500	11120	18.00	1.60	TL-7500-88
100	100	305	205	7500	11200	18.90	1.80	TL-7500-100
113	112.5	330	217.5	7500	11270	19.80	1.90	TL-7500-113
125	125	355	230	7500	11330	20.70	2.10	TL-7500-125
138	137.5	380	242.5	7500	11370	21.60	2.30	TL-7500-138
150	150	405	255	7500	11410	22.50	2.40	TL-7500-150
160	160	425	265	7500	11440	23.20	2.60	TL-7500-160
175	175	455	280	7500	11480	24.30	3.0	TL-7500-175
200	200	505	305	7500	11530	26.10	3.30	TL-7500-200
225	225	555	330	7500	11570	27.80	3.30	TL-7500-225
250	250	605	355	7500	11600	29.60	3.60	TL-7500-250

EINBAUVARIANTEN

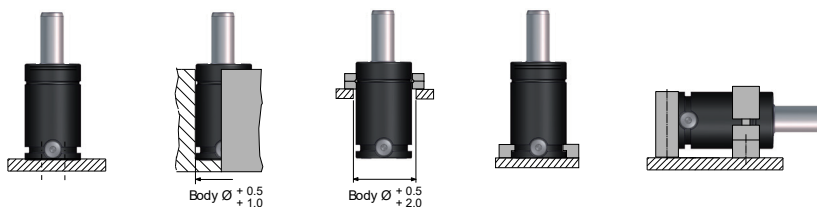

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 15 - 40
Instandhaltungsset	3025027