


**TX-6600**Gasdruckfeder Power Line -
Heavy Duty

Grün
Blau
Rot
Gelb
Schwarz




Norm: VDI 3003
T: < 80 °C

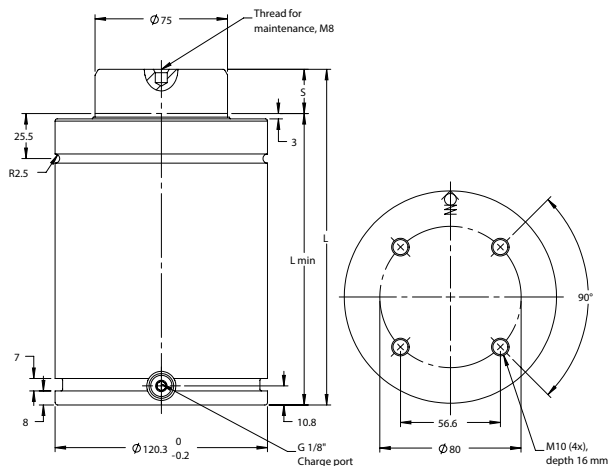

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
25	190	165	6630	7950	9.28	0.73	TX-6600-25
38	216	178	6630	8390	9.81	0.87	TX-6600-38
50	240	190	6630	8700	10.30	1.00	TX-6600-50
63	266	203	6630	8970	10.83	1.13	TX-6600-63
75	290	215	6630	9180	11.32	1.26	TX-6600-75
80	300	220	6630	9260	11.52	1.31	TX-6600-80
100	340	240	6630	9510	12.33	1.53	TX-6600-100
125	390	265	6630	9760	13.35	1.79	TX-6600-125
150	440	290	6630	9950	14.36	2.05	TX-6600-150
160	460	300	6630	10010	14.77	2.16	TX-6600-160
175	490	315	6630	10100	15.38	2.32	TX-6600-175
200	540	340	6630	10220	16.40	2.58	TX-6600-200
250	640	390	6630	10400	18.43	3.11	TX-6600-250
300	740	440	6630	10530	20.46	3.64	TX-6600-300

EINBAUVARIANTEN

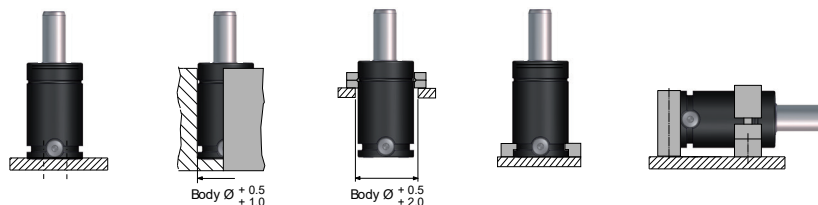

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 30 - 100
Instandhaltungsset	3022954