




XG-6600

Gasdruckfeder Power Line




Grün
Blau
Rot
Gelb
Schwarz

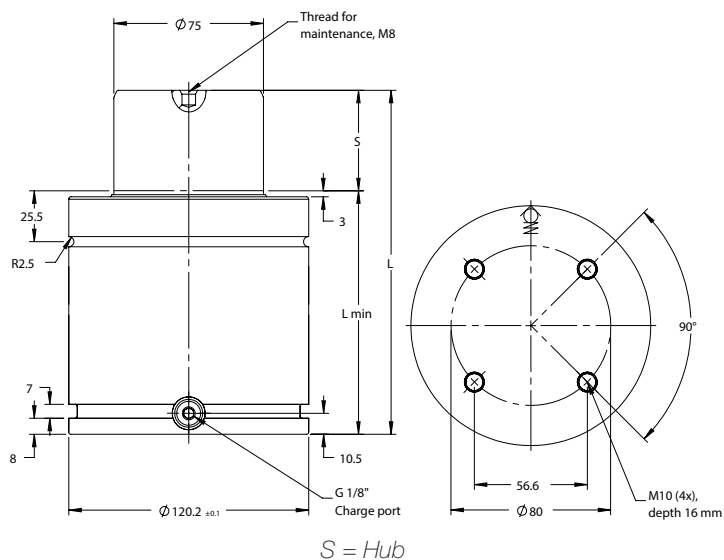

T: < 80 °C

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
16	104	88	6630	8900	5.00	0.32	XG-6600-16
19	110	91	6630	9100	5.11	0.35	XG-6600-19
25	122	97	6630	9390	5.34	0.42	XG-6600-25
32	136	104	6630	9610	5.61	0.49	XG-6600-32
38	148	110	6630	9820	5.84	0.56	XG-6600-38
50	172	122	6630	10060	6.31	0.69	XG-6600-50
63	198	135	6630	10240	6.81	0.83	XG-6600-63
75	222	147	6630	10340	7.27	0.90	XG-6600-75
80	232	152	6630	10410	7.46	1.01	XG-6600-80
100	272	172	6630	10540	8.23	1.23	XG-6600-100
125	322	197	6630	10650	9.19	1.50	XG-6600-125

EINBAUVARIANTEN

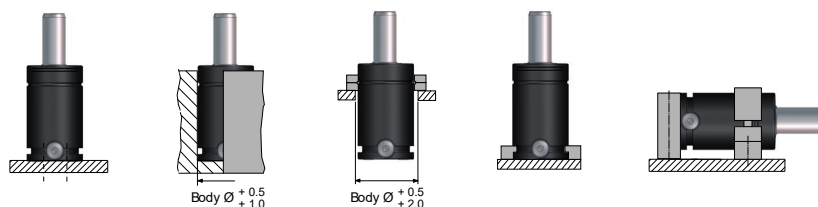

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 30 - 100
Instandhaltungsset	3019912