




SN2811-C-2000

Gasdruckfeder Extra Power

Gas spring Extra Power

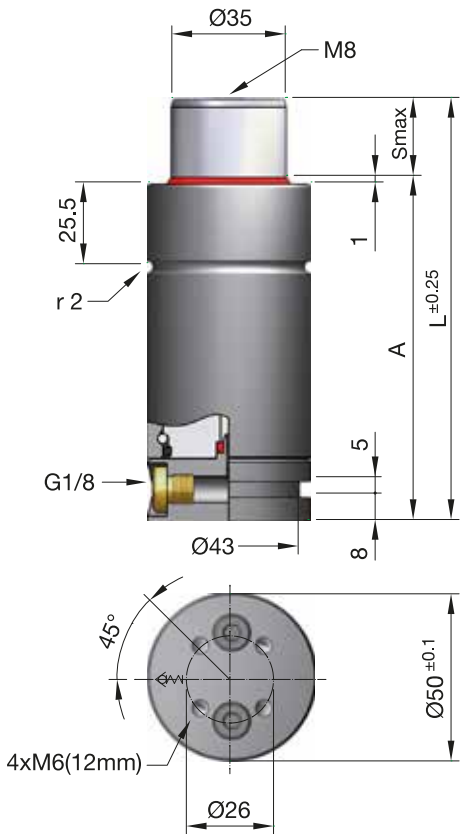


max 80° C



S	A	L	bar	daN1	daN2	Fa	kg	V (l)	Order No.
15	120	135	195	2000 (± 5%)	2320	9.62	0.95	0.085	SN2811-C-2000-15
25	130	155	195	2000 (± 5%)	2545	9.62	1.22	0.099	SN2811-C-2000-25
38	147	185	195	2000 (± 5%)	2690	9.62	1.52	0.128	SN2811-C-2000-38
50	160	210	195	2000 (± 5%)	2820	9.62	1.65	0.152	SN2811-C-2000-50
63	177	240	195	2000 (± 5%)	2890	9.62	1.75	0.193	SN2811-C-2000-63
80	195	275	195	2000 (± 5%)	3005	9.62	1.88	0.214	SN2811-C-2000-80

EINBAUVARIANTEN/ INSTALLATION VARIANTS

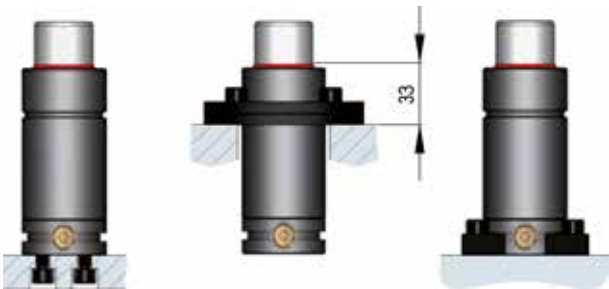



SN2811-C-2000

Gasdruckfeder Extra Power

Gas spring Extra Power

8

Druckmedium	Pressure medium	N2
Max. Fülldruck	Max. filling pressure	195 bar
Min. Fülldruck	Min. filling pressure	35 bar
Max. Betriebstemperatur	Max. working temperature	80 °C
Temperaturabhängige Druckerhöhung	Pressure increase due to temperature	0,33 %/1 °C
Instandhaltungsset	Maintenance kit	SN2990-HC2000
Max. Kolbengeschwindigkeit	Max. piston speed	25 m/min

