




SN2811-1250

Gasdruckfeder Extra Power

Gas spring Extra Power

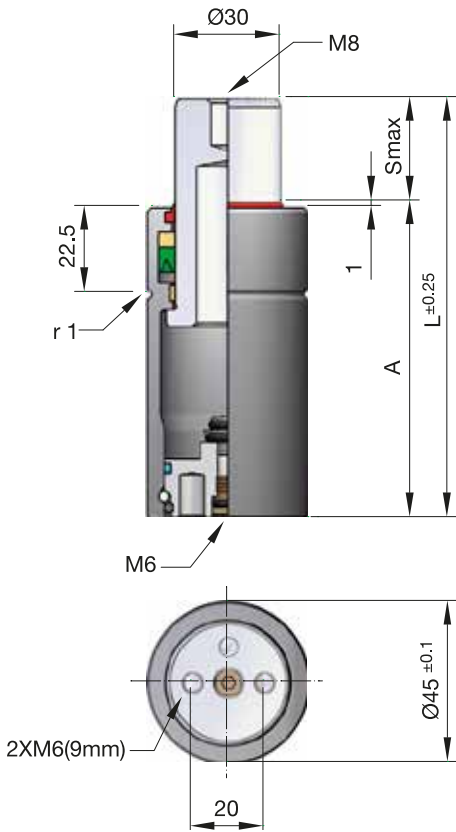

max 80° C



S	A	L	bar	daN1	daN2	Fa	kg	V (l)	Order No.
12	67	79	175	1250 (± 5%)	1740	7.07	0.62	0.029	SN2811-1250-12
25	80	105	175	1250 (± 5%)	1970	7.07	0.75	0.047	SN2811-1250-25
38	97	135	175	1250 (± 5%)	2005	7.07	0.83	0.070	SN2811-1250-38
50	110	160	175	1250 (± 5%)	2070	7.07	0.91	0.088	SN2811-1250-50
63	127	190	175	1250 (± 5%)	2075	7.07	1.10	0.110	SN2811-1250-63
80	150	230	175	1250 (± 5%)	2020	7.07	1.17	0.146	SN2811-1250-80

EINBAUVARIANTEN/INSTALLATION VARIANTS





SN2811-1250
Gasdruckfeder Extra Power
Gas spring Extra Power

8

Druckmedium	Pressure medium	N2
Max. Fülldruck	Max. filling pressure	175 bar
Min. Fülldruck	Min. filling pressure	35 bar
Max. Betriebstemperatur	Max. working temperature	80 °C
Temperaturabhängige Druckerhöhung	Pressure increase due to temperature	0,33 %/1 °C
Instandhaltungsset	Maintenance kit	SN2990-H1250
Max. Kolbengeschwindigkeit	Max. piston speed	25 m/min

