


Gasdruckfedern kompakte Bauform

Gas springs



compact structural shape

Ressorts à gaz
forme de construction compacte


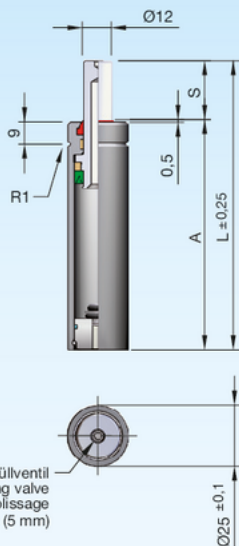


Füllventil
Filling valve
Valve de remplissage
M6 (5 mm)

Einbauvarianten / Installation variants / Variantes de montage



Druckmedium	Pressure medium	Médium de pression	Stickstoff (N ₂)
Max. Fülldruck	Max. filling pressure	Pression de rempl. max.	150 bar
Min. Fülldruck	Min. filling pressure	Pression de rempl. min.	50 bar
Max. Betriebs- temperatur	Max. working temperature	Température de service max.	80 °C
Temperaturabhängige Druckerhöhung	Pressure increase due to temperature	Accroissement de pression sous l'influence de la temp.	0,33 %/1 °C
Instandhaltungssatz	Maintenance kit	Jeu de maintenance	SN299 0-F420
Max. Kolben- geschwindigkeit	Max. piston speed	Vitesse max. du piston	25 m/min.

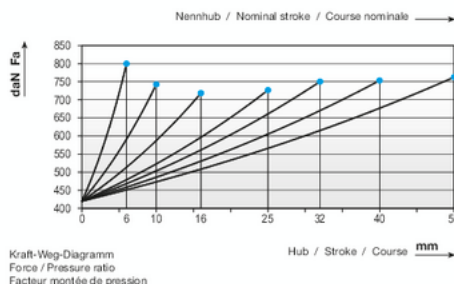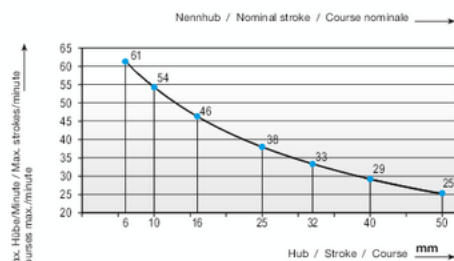[illegible]