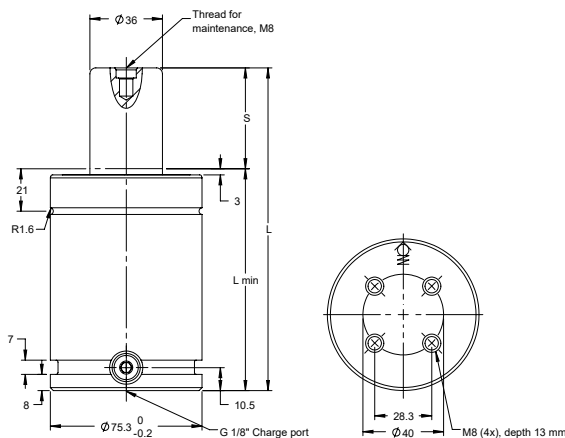



**K-1500***Gasdruckfeder*

8

Grün
Blau
Rot
Gelb
Schwarz

**T: < 80 °C** $S = \text{Hub}$

S1	S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
25	25	110	85	1500	2400	2.05	0.10	K-1500-25
38	38.1	136.2	98.1	1500	2300	2.35	0.14	K-1500-38
50	50	160	110	1500	2300	2.50	0.18	K-1500-50
64	63.5	187	123.5	1500	2300	2.75	0.22	K-1500-64
80	80	220	140	1500	2300	3.05	0.27	K-1500-80
100	100	260	160	1500	2300	3.40	0.34	K-1500-100

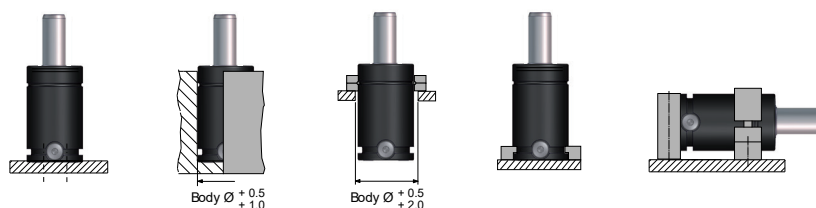EINBAUVARIANTEN

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 15 - 40
Instandhaltungsset	3017230-1500