



TU-1500


Gasdruckfeder Standard Line



Grün
Blau
Rot
Gelb
Schwarz




Norm: VDI 3003
T: < 80 °C

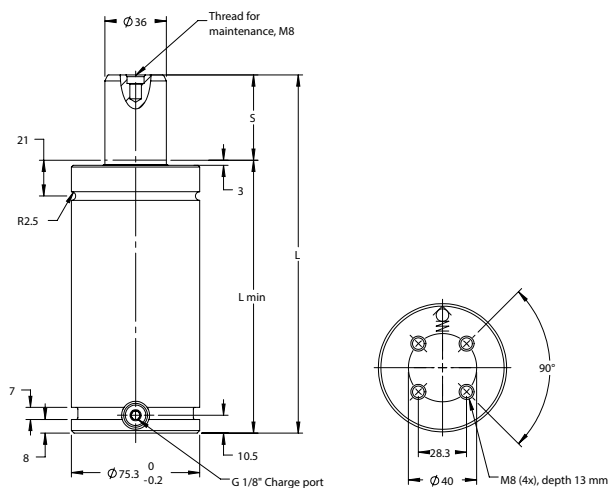 $S = \text{Hub}$

S1	S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
25	25	160	135	1500	2300	3.65	0.10	TU-1500-25
38	38.1	186.2	148.1	1500	2300	3.89	0.15	TU-1500-38
50	50	210	160	1500	2300	4.11	0.18	TU-1500-50
64	63.5	237	173.5	1500	2300	4.35	0.22	TU-1500-64
80	80	270	190	1500	2300	4.66	0.28	TU-1500-80
100	100	310	210	1500	2300	5.02	0.34	TU-1500-100
125	125	360	235	1500	2300	5.48	0.42	TU-1500-125
160	160	430	270	1500	2300	6.12	0.53	TU-1500-160
175	175	460	285	1500	2300	6.34	0.60	TU-1500-175
200	200	510	310	1500	2300	6.86	0.68	TU-1500-200
225	225	560	335	1500	2300	7.26	0.76	TU-1500-225
250	250	610	360	1500	2300	7.77	0.81	TU-1500-250
300	300	710	410	1500	2300	8.69	0.96	TU-1500-300

EINBAUVARIANTEN

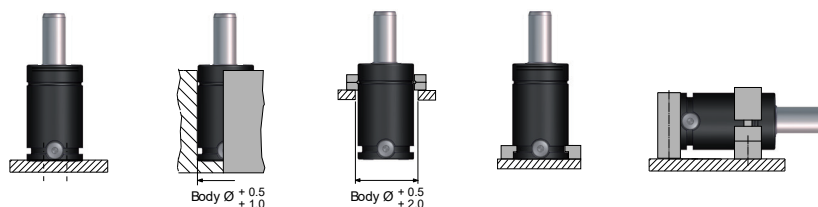

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 15 - 40
Instandhaltungsset	2014068-02