


**TX-750**Gasdruckfeder Power Line -
Heavy Duty

8

Grün
Blau
Rot
Gelb
Schwarz




Norm: ISO 11901
T: < 80 °C

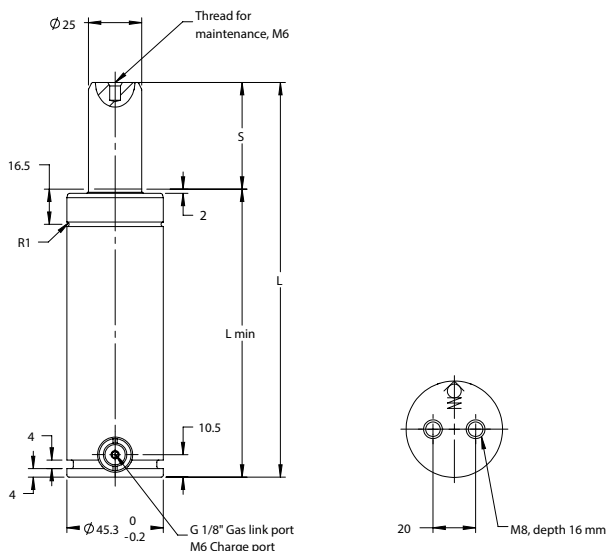

S = Hub

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
13	111	98	740	1200	0.85	0.040	TX-750-13
25	135	110	740	1200	0.93	0.060	TX-750-25
38	161	123	740	1200	1.01	0.070	TX-750-38
50	185	135	740	1200	1.09	0.090	TX-750-50
63	211	148	740	1200	1.17	0.11	TX-750-63
75	235	160	740	1200	1.25	0.12	TX-750-75
80	245	165	740	1200	1.28	0.13	TX-750-80
100	285	185	740	1200	1.41	0.15	TX-750-100
125	335	210	740	1210	1.56	0.19	TX-750-125
150	385	235	740	1210	1.72	0.22	TX-750-150
160	405	245	740	1210	1.79	0.23	TX-750-160
175	435	260	740	1200	1.88	0.25	TX-750-175
200	485	285	740	1210	2.04	0.28	TX-750-200

EINBAUVARIANTEN

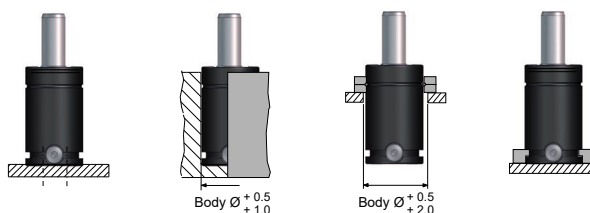

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 15 - 100
Instandhaltungsset	3026200