

**XG-350**


Gasdruckfeder Power Line



Grün
Blau
Rot
Gelb
Schwarz




T: < 80 °C

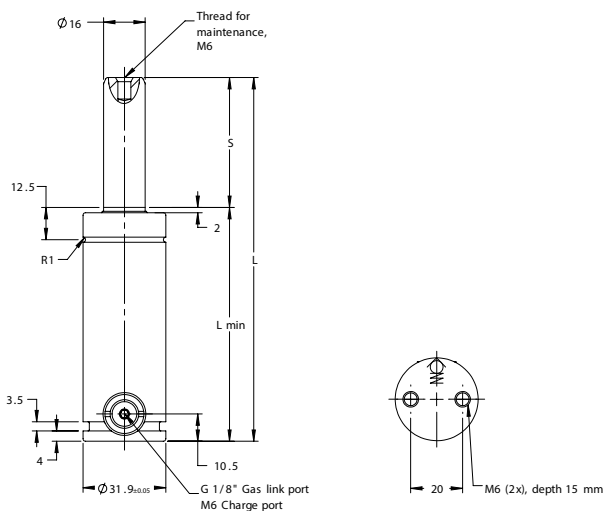

S = Hub

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
10	60	50	360	590	0.23	0.010	XG-350-10
13	66	53	360	520	0.23	0.010	XG-350-13
16	72	56	360	530	0.24	0.010	XG-350-16
19	78	59	360	560	0.25	0.010	XG-350-19
25	90	65	360	550	0.27	0.020	XG-350-25
32	104	72	360	550	0.29	0.020	XG-350-32
38	116	78	360	550	0.31	0.030	XG-350-38
50	140	90	360	560	0.35	0.030	XG-350-50
63	166	103	360	550	0.39	0.040	XG-350-63
75	190	115	360	550	0.43	0.050	XG-350-75
80	200	120	360	550	0.44	0.050	XG-350-80
100	240	140	360	550	0.50	0.060	XG-350-100
125	290	165	360	550	0.58	0.080	XG-350-125

EINBAUVARIANTEN

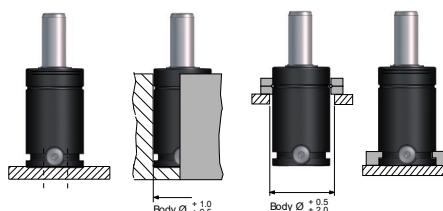

Druckmedium	N2
Max. Fülldruck (bei 20° C)	180 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 50 - 100
Instandhaltungsset	3018845