




X-20000

Gasdruckfeder Power Line



Grün
Blau
Rot
Gelb
Schwarz

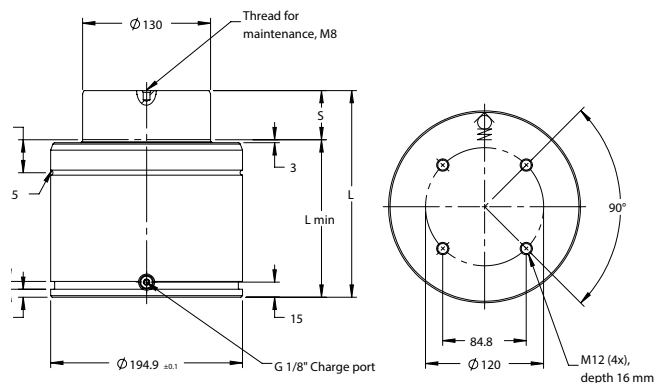


Norm: ISO 11901
T: < 80 °C

 $S = \text{Hub}$

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
19	148	129	20000	25900	21.50	1.21	X-20000-19
25	160	135	20000	27000	22.16	1.38	X-20000-25
32	174	142	20000	28000	22.92	1.59	X-20000-32
38	186	148	20000	28700	23.57	1.77	X-20000-38
50	210	160	20000	29800	24.87	2.12	X-20000-50
63	236	173	20000	30700	26.28	2.50	X-20000-63
75	260	185	20000	31300	27.59	2.85	X-20000-75
80	270	190	20000	31500	28.13	3.0	X-20000-80
100	310	210	20000	32300	30.30	3.58	X-20000-100
125	360	235	20000	33000	33.00	4.31	X-20000-125

EINBAUVARIANTEN

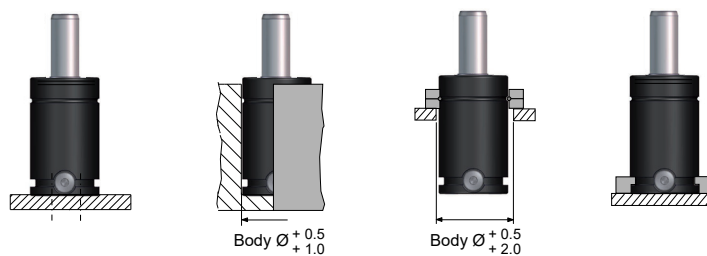

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 15 - 40
Instandhaltungsset	3022902