

**X-2400**


Gasdruckfeder Power Line



Grün
Blau
Rot
Gelb
Schwarz




Norm: VDI 3003
T: < 80 °C

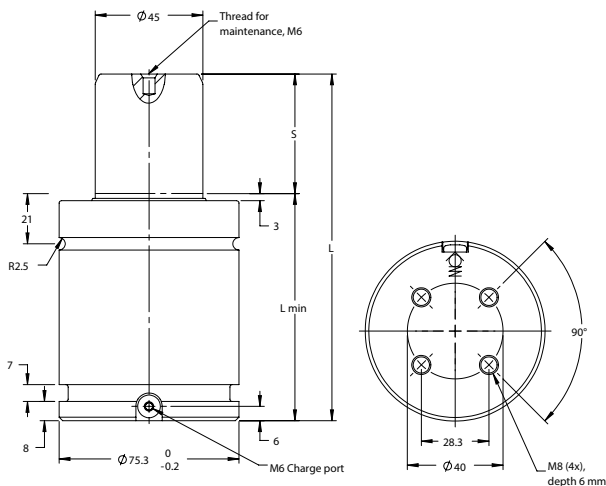 $S = \text{Hub}$

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
16	77	61	2400	3830	1.34	0.090	X-2400-16
19	83	64	2400	3850	1.38	0.10	X-2400-19
25	95	70	2400	3870	1.45	0.13	X-2400-25
32	109	77	2400	3860	1.56	0.16	X-2400-32
38	121	83	2400	3840	1.65	0.18	X-2400-38
50	145	95	2400	3920	1.84	0.23	X-2400-50
63	171	108	2400	3920	2.20	0.28	X-2400-63
75	195	120	2400	3920	2.26	0.33	X-2400-75
80	205	125	2400	3920	2.32	0.35	X-2400-80
100	245	145	2400	3930	2.66	0.43	X-2400-100
125	295	170	2400	3930	3.05	0.54	X-2400-125

EINBAUVARIANTEN

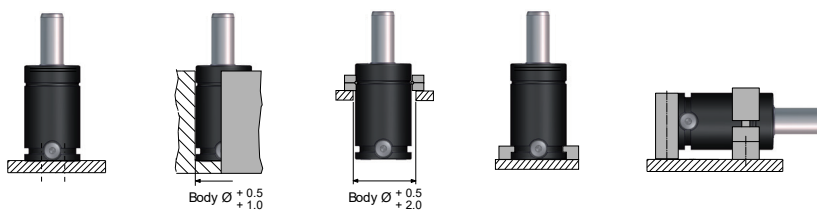

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 40 - 100
Instandhaltungsset	3018848