



TL-5000


Gasdruckfeder



Grün
Blau
Rot
Gelb
Schwarz




T: < 80 °C

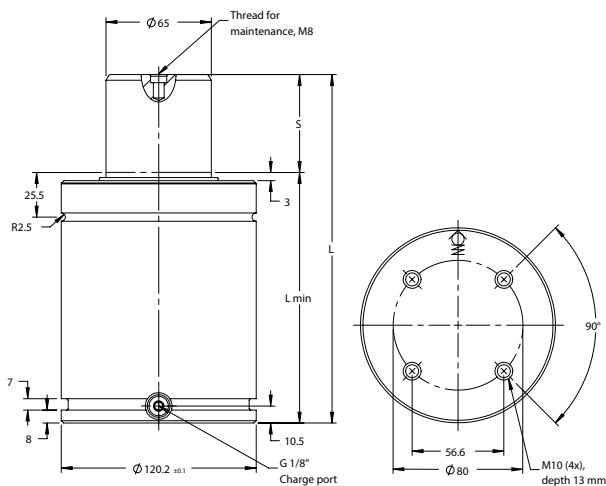

S = Hub

S1	S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
25	25	152.5	127.5	5000	8010	9.04	0.20	TL-5000-25
38	37.5	177.5	140	5000	8190	9.70	0.30	TL-5000-38
50	50	202.5	152.5	5000	8280	10.35	0.40	TL-5000-50
63	62.5	227.5	165	5000	8350	11.01	0.50	TL-5000-63
75	75	252.5	177.5	5000	8380	11.67	0.60	TL-5000-75
80	80	262.5	182.5	5000	8400	11.93	0.70	TL-5000-80
88	87.5	277.5	190	5000	8410	12.32	0.70	TL-5000-88
100	100	302.5	202.5	5000	8440	12.98	0.80	TL-5000-100
113	112.5	327.5	215	5000	8450	13.64	0.90	TL-5000-113
125	125	352.5	227.5	5000	8470	14.30	1.00	TL-5000-125
138	137.5	377.5	240	5000	8480	14.96	1.10	TL-5000-138
150	150	402.5	252.5	5000	8490	15.62	1.20	TL-5000-150
160	160	422.5	262.5	5000	8500	16.14	1.30	TL-5000-160
175	175	452.5	277.5	5000	8510	16.94	1.40	TL-5000-175
200	200	502.5	302.5	5000	8520	18.25	1.60	TL-5000-200
225	225	552.5	327.5	5000	8530	19.57	1.80	TL-5000-225
250	250	602.5	352.5	5000	8540	20.89	2.00	TL-5000-250

EINBAUVARIANTEN

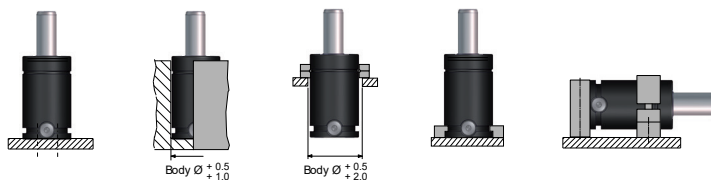

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 15 - 40
Instandhaltungsset	3024178