



TU-7500

Gasdruckfeder Standard Line




8

Grün
Blau
Rot
Gelb
Schwarz




Norm: VDI 3003
T: < 80 °C

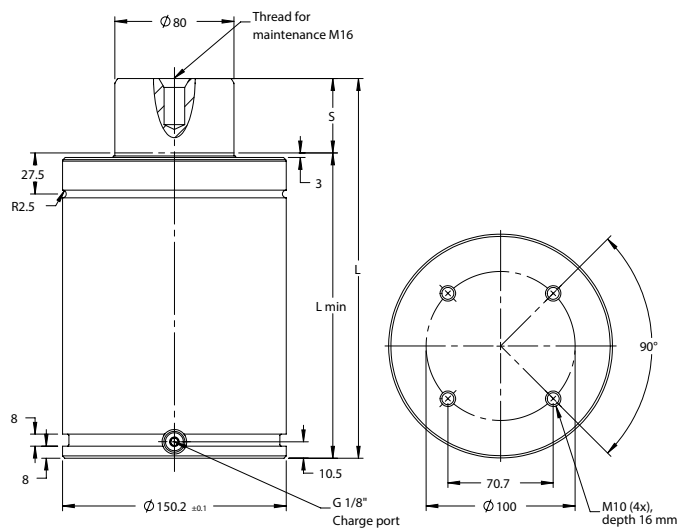 $S = \text{Hub}$

S1	S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
25	25	205	180	7500	10500	20.30	0.51	TU-7500-25
38	38.1	231.2	193.1	7500	11000	21.40	0.67	TU-7500-38
50	50	255	205	7500	11300	22.40	0.81	TU-7500-50
64	63.5	282	218.5	7500	11500	23.50	0.98	TU-7500-64
80	80	315	235	7500	11700	24.80	1.18	TU-7500-80
100	100	355	255	7500	11900	26.50	1.43	TU-7500-100
125	125	405	280	7500	12100	28.50	1.74	TU-7500-125
160	160	475	315	7500	12200	31.40	2.17	TU-7500-160
175	175	505	330	7500	12300	32.60	2.06	TU-7500-175
200	200	555	355	7500	12300	34.70	2.66	TU-7500-200
225	225	605	380	7500	12400	36.80	2.96	TU-7500-225
250	250	655	405	7500	12400	38.80	3.27	TU-7500-250
300	300	755	455	7500	12400	42.90	3.88	TU-7500-300

EINBAUVARIANTEN

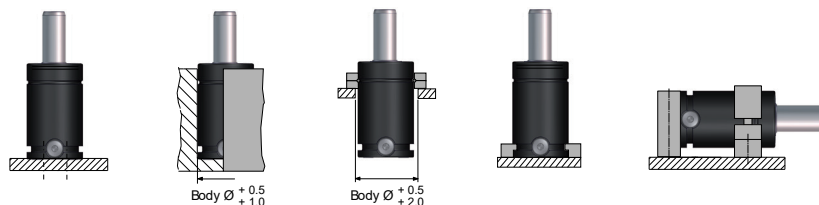

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 15 - 40
Instandhaltungsset	3018877