



SN5650-PMU-0065 – SN5650-PMU-0260
CAM UNITS
OPERATING INSTRUCTIONS



PowerMax®

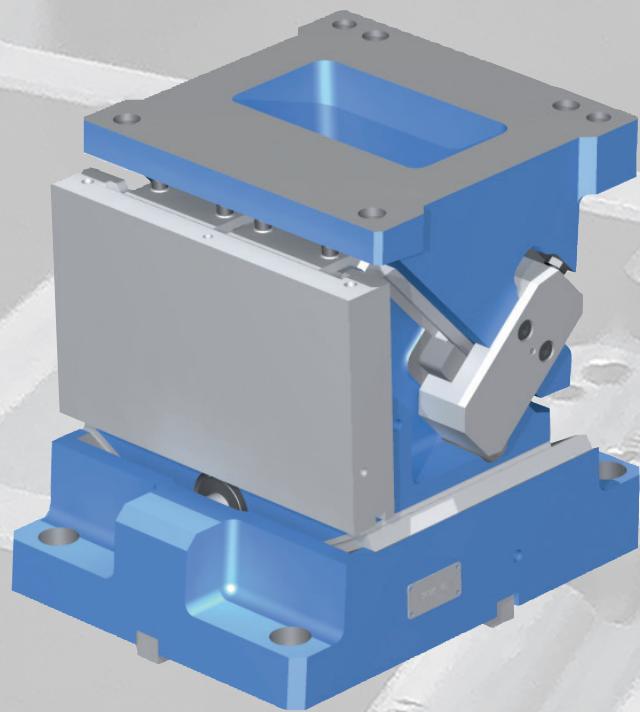

STRACK®
NORMALIEN

Content:

Preamble

	Seite:
1. Safety instructions. Please absolutely consider!	4
2. After receipt of delivery	5
3. Characteristics	6
3.1 Description of the construction types	7
4. Scope of delivery	7
5. Design of the PowerMax side cam	8
6. Preparation of tool and press	9
7. Shouldering	9
8. Production	10
8.1 Handling with safety ring bolt (SN1594)	11
8.2 Marking of the cams	12
9. Dismounting of the mounting plate at cam widths 0065-0260 (only Premium)	13
9.1 Mounting of the mounting plate at cam units 0065-0260 (only Premium)	14
10. The Lock-Out-Systems	15
10.1 Lock-Out-System 2651-LOS	16
10.1.1 Mounting of the Lock-Out-System 2651-LOS	17
10.2 Lock-Out-System 2654-LOS	19
10.2.1 Information of the Lock-Out-System 2654-LOS	21
11. Dismounting / Mounting of the gas springs	22
12. Modification of the system pressure of the gas springs	23
12.1 Discharging of the pressure at a gas spring	23
12.2 Increase of the pressure / charging of a gas spring	24
13. Standstill and storing	26
14. Maintenance	26
14.1 Adjustment of the active return	27
14.2 Comparison bronze with solid lubricant and SNS sinter guiding elements	28
15. Appendix	31
15.1 Internet and CAD	31
15.2 General description of gas springs	32
15.3 Maximal operating conditions for gas springs	33
15.4 Calculations gas springs	34
15.5 Mounting instructions gas springs	35
15.6 Filling pressure list gas springs	36
16. Exploded view and item list	40

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260**Preamble**

Thank you for the confidence in the product of **STRACK NORMA GmbH & Co. KG**

We are pleased about your decision to buy a product of **STRACK**. To facilitate the handling with the product, we established these operating instructions.

The operating instructions are an important element to the side cam unit **SN5650-PMU** and provide the secure and efficient operating. It is intended for all persons which are working with these cam units and which are responsible for the secure operating.

For reasons of the operating safety a copy of these operating instructions has to be left at the side cam unit to guarantee the direct access for the operating personnel.

The security advices in the operating instructions have particularly been respected to recognize and to avoid possible dangers. Please read the operating instructions carefully and completely before mounting and initial operation of the side cam unit **SN5650**.

A regular maintenance is necessary to guarantee a secure and economic application.

If the instructions and advices of these operating instructions are not observed, any liability on our part for resulting damages and performance losses will be excluded.

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260**1. Security advices. Please absolutely consider!**

Before mounting and initial operation and all further works at the **STRACK PowerMax cam** please absolutely read the following safety instructions.

The cam has to be used according to these operating instructions. If new operating instructions will be established, this version loses its validity.

Service and maintenance works at the mounted **STRACK** nitrogen-gas springs may only be effected by persons trained and instructed by **STRACK NORMA** with good professional knowledge.

If the mounted **STRACK** nitrogen-gas spring is used incorrectly or not for the intended application, menace:

Dangers for the health

Dangers for the **STRACK** nitrogen-gas springs

and other property holdings of the operator,

Dangers for the efficiency of the **STRACK** nitrogen-gas springs.

For all operations at the **STRACK** side cam, the valid Ordinance on Industrial Safety and Health paragraph 3 has to be considered.

Press, tool and peripheral devices have to be suited, prepared and adjusted for the application of the **STRACK** side cams.

**Attention:**

Before and during the service- and maintenance operations at the tool respectively at the **STRACK** cam there is an increased risk of accident. Therefore these operations may only be effected at cam units which are driven back.

Seized cam units at faultless gas springs can cause an abrupt decompression. Thus they can be an injury risk.

Damaged gas spring may not be used again. The exchange of individual parts has to be agreed with **STRACK NORMA**.

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260**2. After receipt of delivery**

Before opening, please check the delivery concerning damages. Please reclaim damages directly at the transport company, which has delivered the consignment.

Please compare the content of the consignment with the delivery note respectively the enclosed list of items (see appendix). Please also ascertain that all parts are present and unpacked.

Not till then dispose of the transport- and packing material.

If the content is damaged without visible damage of the packing material, please do not return it for repair or exchange.

Please contact **STRACK NORMA GmbH & Co.KG**, Lüdenscheid, to get further information.

Phone: 02351 / 8701 - 0 reception
 - 252 Mr. Müller

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

3. Characteristics

The execution of this **STRACK** cam unit is a “side cam unit type SN5650”.

These cams can be mounted:

- without mounting plate as “Basis” and “Medium” version
- with mounting plate as “Premium version”

These PowerMax cam units consists of:

- cam retainer
- cam body
- driver

with the corresponding accessories

All **PowerMax** cam units are equipped with gas springs.

In this system, nitrogen with a purity grade of ≥ 99.8 vol.-% is used as active fluid medium for the gas springs.

The cylinder dimension, cylinder number and filling pressure (different at the diverse cam types) determine the reset force which is available.

Please consider that all **PowerMax** cam units are the successful result of a long development work. The resulting advantages optimally develop at the full exploitation of the respective cam stroke during the work process; that means, the stamping- and benching operation of the cam unit should be carried out in the front end position.

The complete exploitation of the cam stroke allows the maximal intervention of the active return and the therewith connected highest possible supply of retracting- and stripper forces (about 10 % of the pressing force).

In the front endpoint of the cam stroke there is the maximal retraction of the gas spring. Generally applies: The construction and the resulting values, like assembly height and restoring forces, require that the cam unit is mounted in the front end position.

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

3.1 Description of the construction types

Unique in the world is the differentiation of a cam program in 3 types:
BASIS, MEDIUM, PREMIUM.

These types which are totally similar in the dimensions differ exclusively in their performance values and the equipment details.

The BASIS cam is equipped with guide elements out of bronze-graphite. The working surface is out of cast iron.

The MEDIUM cam is equipped with guide elements out of sintermetal, the working surface is out of cast iron and the active return can be adjusted.

The PREMIUM cam is equipped with guide elements out of sintermetal, the working surface is a removable mounting plate and the active return can be adjusted.

**Attention:**

The mounted gas springs serve for the additional reset of the cam slide.
The working powers which are necessary for the operation are absorbed by the active return (only Medium- and Premium version).

4. Scope of delivery

The PowerMax cam units are delivered preassembled and with a precise guide clearance.

The mounted gas springs, unless otherwise desired, are delivered with maximal filling pressure.

The working surface can already contain client-specific insertions. Also Premium special mounting plates belong to these.

All cams can also be produced for the machining of high strength sheets, contrary to the angles in five steps described in the catalogue, in all intermediate angles according to customers' requirements.

Please contact us.


PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

5. Design of the PowerMax cams

STRACK NORMA Power Max cams are produced in a high-precision manner.

The guidances which are grinded to a tight guide clearance allow highest loads. The cam units can be equipped with the tool on the working surface. In doing so you have to consider that the force affects in the centre of the working surface.

If you have an off-center load irregular forces arise on the guidances and produce an increased wear.
(See 3.1. description of the construction types)

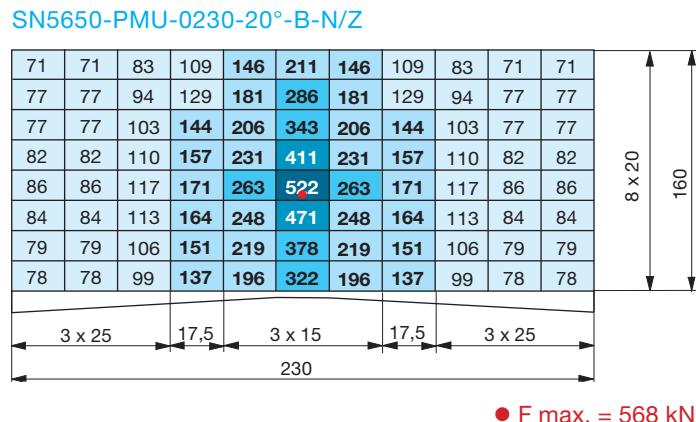

Herefrom you can clearly read the maximal force outside the centre of activity for the x respectively the y axis. Modifications of position which will be possible in future should be considered previously to choose a cam size which corresponds to the force.

To be able to guarantee an equal running life, the load forces reduce, according to the position, on the working face.

You will find detailed information in the catalogue indications concerning to your cam in the internet under:

www.strack.de

Basis <750.000 strokes

Medium >1.000.000 strokes

Premium >1.000.000 strokes



Attention:

If the cam should be superstructed with accessories a new calculation is necessary.

Please contact us.

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

6. Preparation of tool and press

Tool, press and peripheral devices have to be suited, prepared and adapted according to the indications of **STRACK NORMA** for the utilisation of the **PowerMax cam** unit.

Drain off fluid (for example water or drawing compounds) well-directed by drainage. You have to take care that punching wastes don't fall in or on the cam guidance.


Cam slide and guidances can seize. Parts falling down can damage the guidances, hereby possibly the running life of the cam reduces. If there is a failure, the cam slide can't be placed back in the initial position.

7. Shouldering

The force distribution of the individual forces in the cams depends on the right shouldering in the tool and the cam angle.

If the heights h_1 and h_2 (see the picture below) reduce in the tool, the forces of the shouldering can't be completely absorbed.

You will find detailed information in the catalogue indications concerning your cam in the internet under www.strack.de

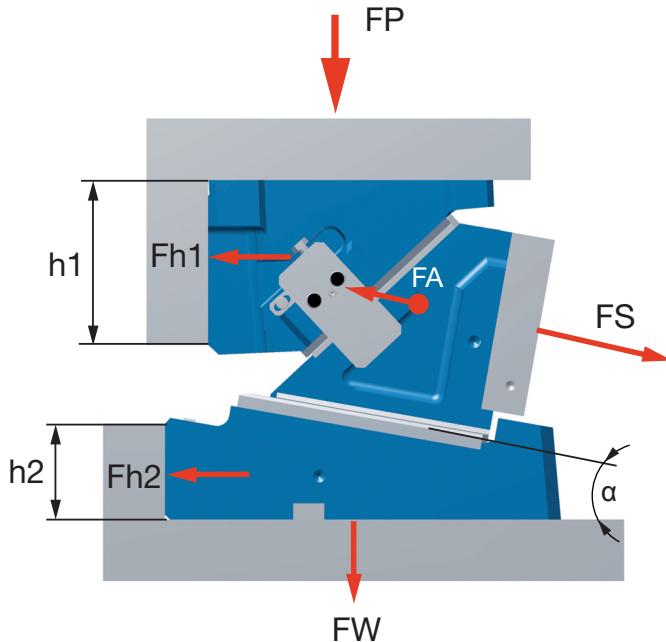

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

8. Production

During the production no particular precautionary measures have to be taken, which exceed the valid operating safety regulations paragraph 3.

Attention:

If attachments are removed during the assembly process, they must be secured again with Loctite 242.

Notes on tightening torques:

Screws DIN EN ISO 4762-10.9	M6	M8	M10	M12	M16	M20
Tightening torque [Nm]	14	33	65	121	302	590

All data
without guarantee.

Advice:

Please secure that the **STRACK** cams especially the gas springs are not dipped in fluid.

If you are using for example aggressive drawing oils during the production, make a controlled drain for them (drainage borings, cutouts and so on), so that the fluids are directed away from the gas springs.

Thereby seal damages are avoided.

Tip:



Control the nitrogen pressure of the gas springs in regular intervals, to detect changes in the pressure level in time. During maintenance works you have to consider a correct return of the cam slide.

Advice:

The cam units are equipped with low-maintenance slide elements out of bronze with solid lubricant. In normal case lubrication is not necessary.



A lubrication may only be effected in case of need with the following lubricants:

Company	Oils	Greases
AGIP	Potra ATF	Agip GR MU 2
BP	Autran DX II	Energrease
ESSO	ATF Suffix A	Nebula EP 2
ESSO	ATF - D	Beacon EP 2
OMV	ATF Serie	OMV signum CX 2
SHELL	Donax TM	Retinax LX
SHELL	Donax TF	

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260


8.1 Handling with safety ring bolt (SN1594)

Beginning from the cam units 260, cam retainers and slides can simplified be mounted together by means of the safety ring bolt SN1594, because of the fact that the different positions of the handling screwing thread facilitates the mounting of the cam slide in the slide retainer.

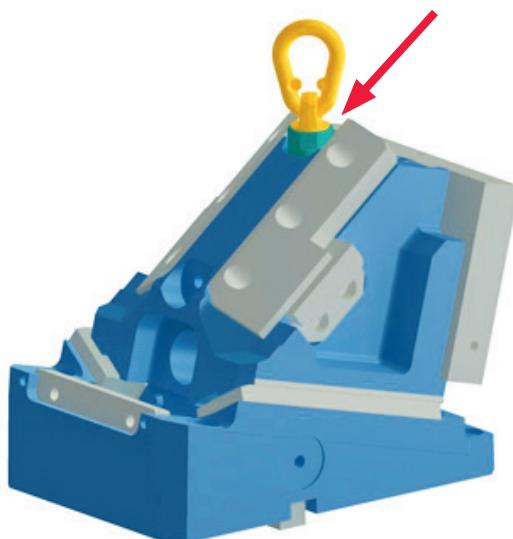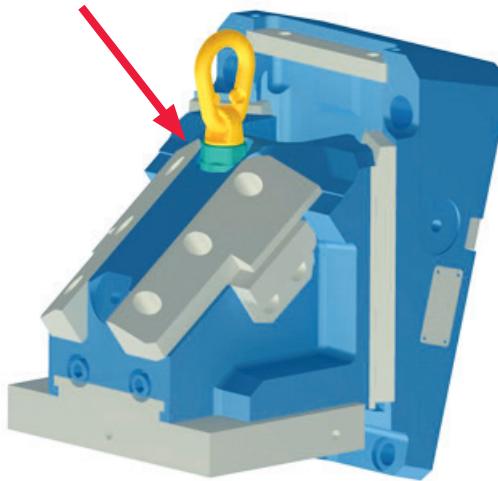

By changing the position of the safety ring bolt, the cam retainer and the cam slide can be simpler mounted together into the tool.

Mounting of the cam retainer with the cam slide in the tool with lateral thread for the flexible mounting and turning of the cam.

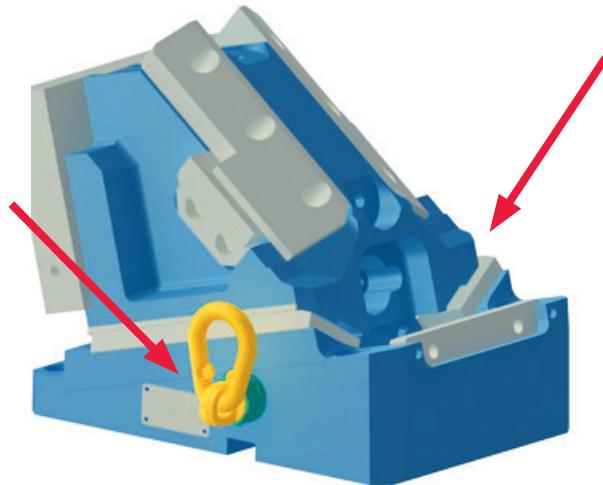


PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

8.2 Marking of the cams

All PowerMax cams are equipped with a type plate.


On this type plate the name and the serial number of the cam are laserered.

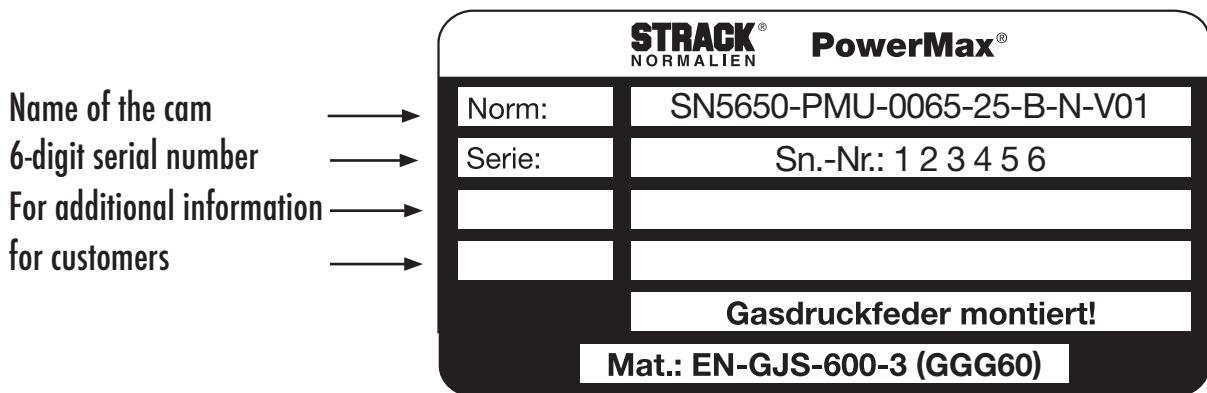

The serial number refers to all cams of an order and is different concerning order to order. The Power Max cams were adjusted in the company STRACK. For this the hardened steel gide strips were ground to the corresponding dimension. The appropriate screws were additionally secured by the screw locking adhesive Z9093.

Attention: Don't remove the rails. If this should be inevitable in a case of a crash, the replacement strips have to be adjusted again.

To avoid confusions within a series the assembly groups of the individual cams are marked within the series with numbers of 1 to ... (see picture below). During the mounting please absolutely consider the right coordination of the components to avoid problems.

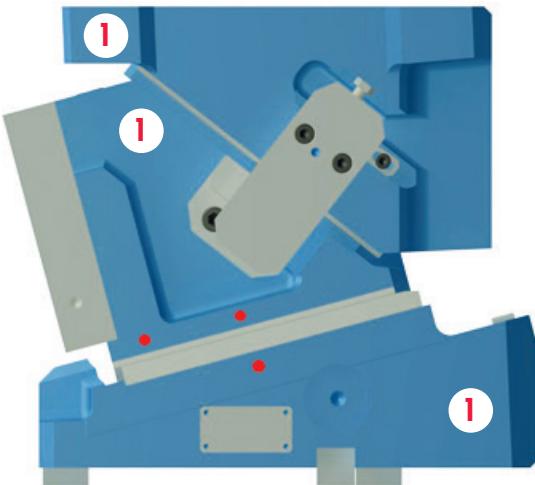

Additional markings on slide retainer and slide body make it possible to control the position of the cam in the tool.

If the cam is moved together, the upper markings correspond; if the cam is extended the lower markings correspond.

If the marking on the cam retainer is between the marking of the body , the whole cam is not driven back in the correct initial position.

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260**9. Dismounting of the mounting plate at cam widths 0065-0260
(only Premium)**

The PREMIUM version of the PowerMax® is equipped with a demountable mounting plate, which makes a simpler handling possible.

The high-precision plate can be dismounted easily to be able to carry out further machining.



Step 1

Loose and remove the securing screw on the top side (picture 1).

Step 2

Push the mounting plate out of the precision nut guidance (picture 2).

Now you can carry out further machining at your mounting plate.

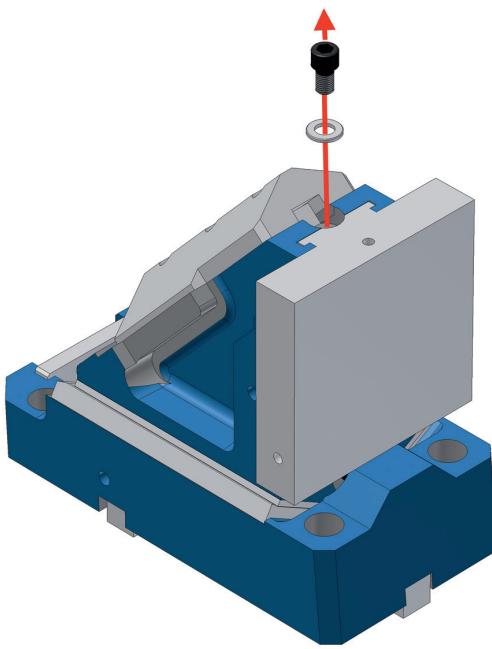
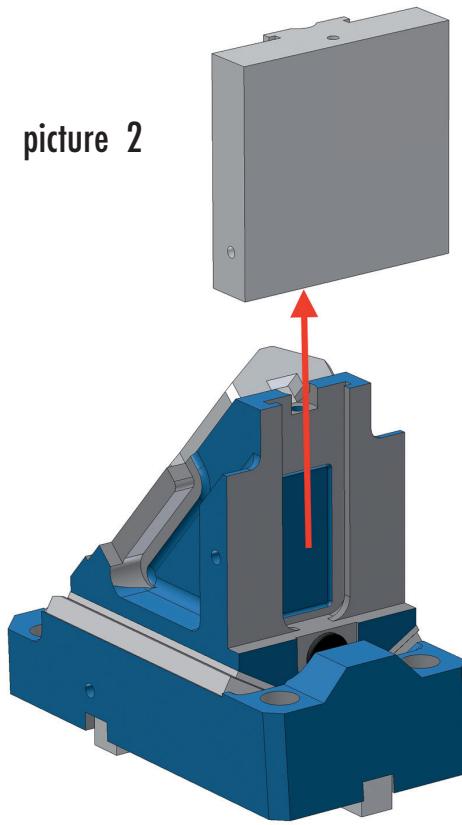
picture 1**picture 2**

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260**9.1 Mounting of the mounting plate at cam widths 0065-02030
(only Premium)****Step 1**

Before pushing the mounting plate back in the groove guidance it is absolutely necessary to clean the stop lug (AN) and the t-nut guidance of both components.


Step 2

Fix the mounting plate with the securing screw again.

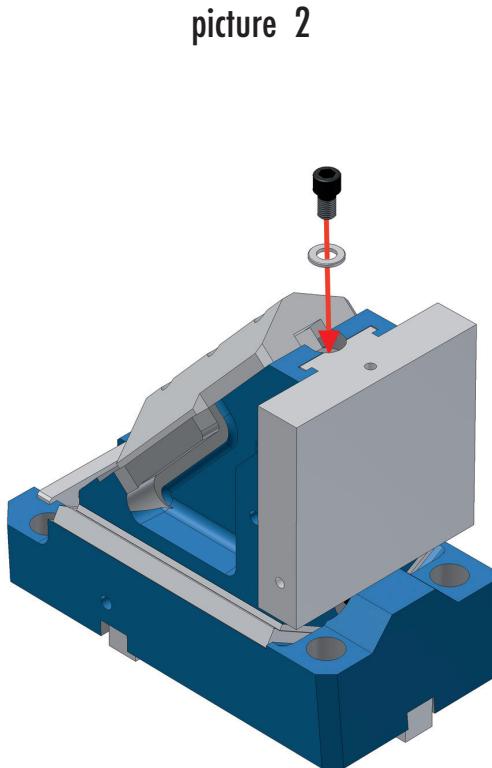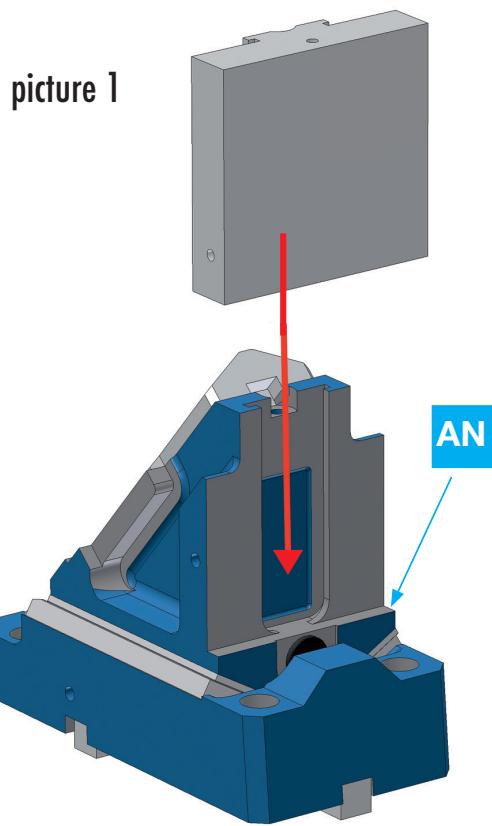


PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260**10. The Lock-Out-Systems****10.1 Lock-Out-System SN5651-LOS**

This lock-out system can be used at mounted and dismounted standard cams.

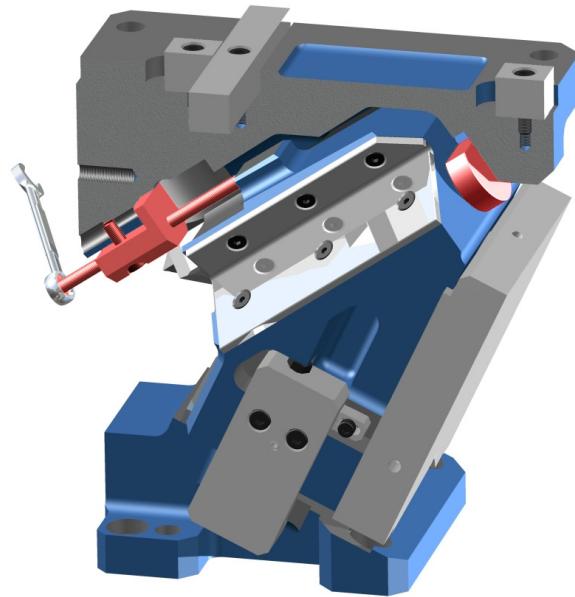
**10.2 Lock-Out-System SN5654-LOS**

This lock-out system can only be used at dismounted standard cams.

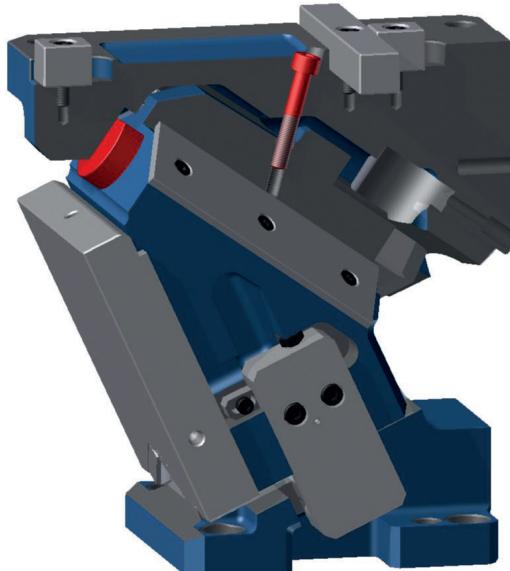


PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

10. Lock-Out-System SN5651-LOS

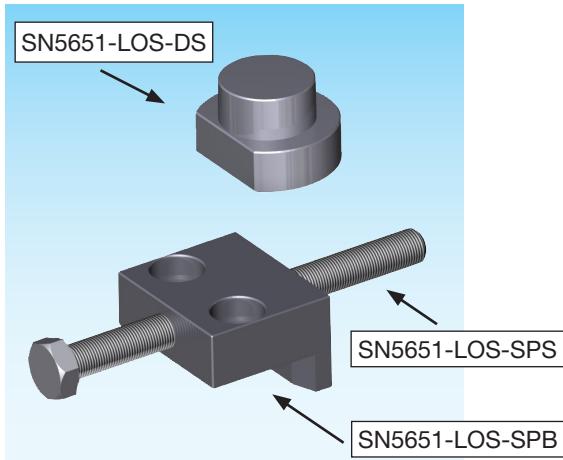

SN5651-LOS
SN5651-LOS-Type
Mat.: ST

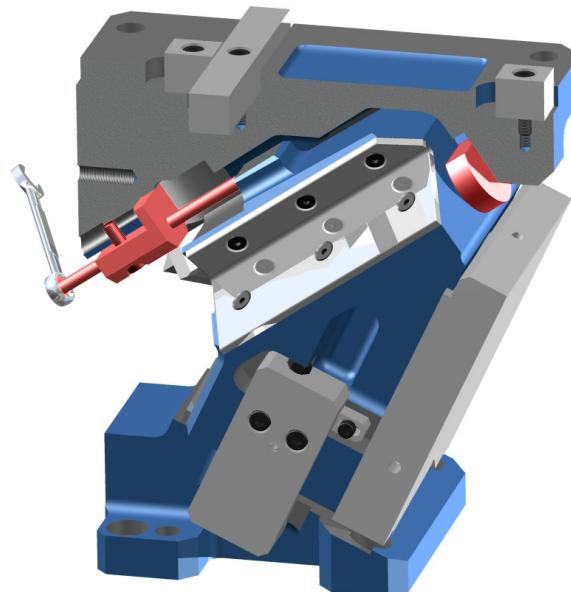


further details under: www.strack.de


Type	for cam	SN5651-PMU-LOS-SPB		SN5651-LOS-SPS		SN5651-LOS-DS	
SN5651-PMU-LOS-0065	SN5651-PMU-0065		0	SN5651-LOS-SPS-M6x90	2	SN5651-LOS-DS-19x15	1
SN5651-PMU-LOS-0090	SN5651-PMU-0090		0	SN5651-LOS-SPS-M8x90	2	SN5651-LOS-DS-19x15	1
SN5651-PMU-LOS-0125	SN5651-PMU-0125		0	SN5651-LOS-SPS-M8x90	2	SN5651-LOS-DS-25x15	1
SN5651-PMU-LOS-0165	SN5651-PMU-0165		0	SN5651-LOS-SPS-M10x120	2	SN5651-LOS-DS-32x15	1
SN5651-PMU-LOS-0230	SN5651-PMU-0230		0	SN5651-LOS-SPS-M12x120	2	SN5651-LOS-DS-32x20	1
SN5651-PMU-LOS-0230	SN5651-PMU-0260		0	SN5651-LOS-SPS-M12x120	2	SN5651-LOS-DS-32x20	1

PowerMax Schiebereinheit SN5650-PMU-0065 – SN5650-PMU-0260**10.1 Mounting of the Lock-Out-System SN5651-LOS**

To fasten the cam for the insertion of borings, the fixation of the cam slide by means of a lock-out-system is necessary. For this purpose please act as following.

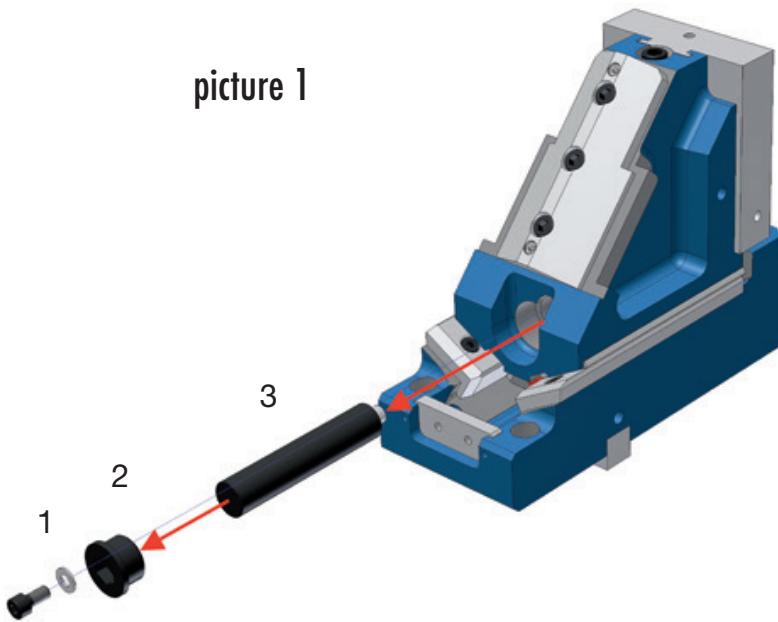picture 1


1. Remove the gas spring by removing at first the securing screw (step 1); afterwards remove the plug (step 2). Now you can remove the gas spring (step 3) out of the boring.

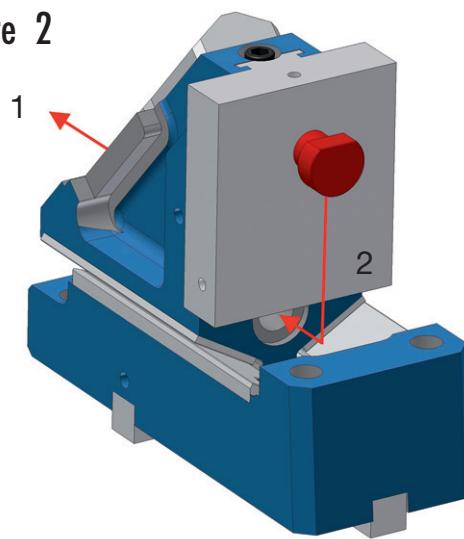picture 2

2. Push the slide in the rear position (step 1). Place the distance disc **SN5651-LOS-DS** in the boring (step 2).


PowerMax Schiebereinheit SN5650-PMU-0065 – SN5650-PMU-0260

picture 3

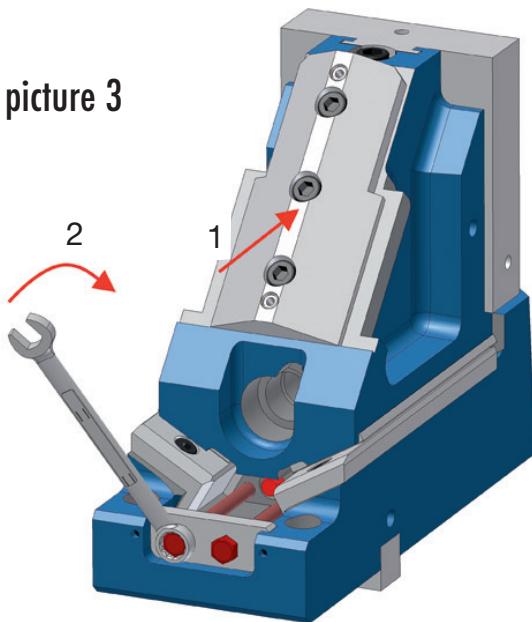

- Now push the cam slide in the front position (step 1). Turn the screws **SN5651-LOS-SPS-M8 x 90** in the slide top (step 2). Tighten the screws cautiously to fasten the cam slide (step 2).


picture 4

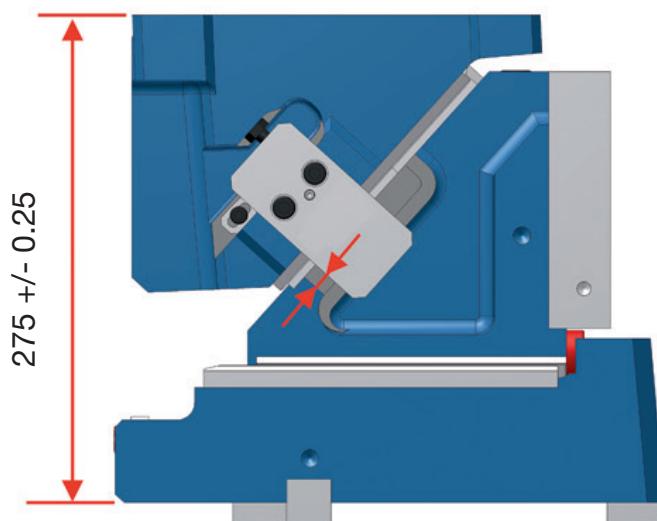

- The slide has an installation height of $275 +/ - 0.25$ mm. Put a final dimension (10 mm) between the slide stop and the active return cramp, to get the exact installation height.

PowerMax Schiebereinheit SN5650-PMU-0065 – SN5650-PMU-0260

10.2 Lock-Out-System SN5654-LOS

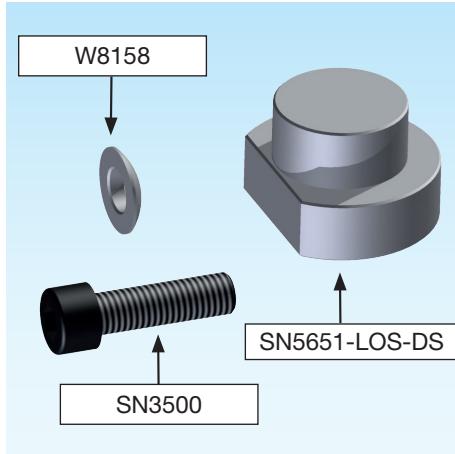


SN5654-LOS



SN5654-LOS-Type



Mat.: ST

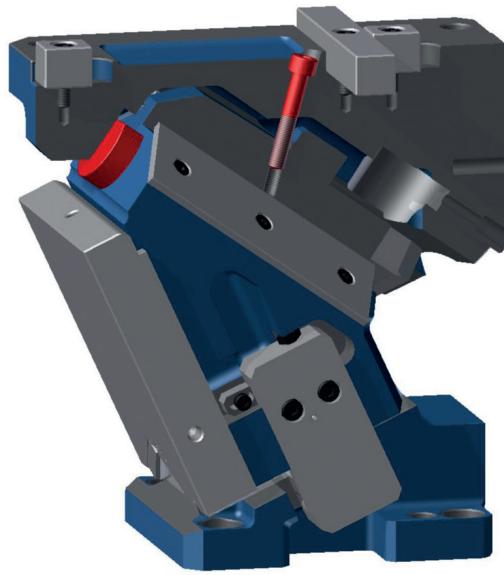

further details under: www.strack.de

Type		Screw	Number	Screw	Number	Locking heel	Number	Ball washer	Number
------	--	-------	--------	-------	--------	--------------	--------	-------------	--------

PMU 0065									
SN5654-PMU-LOS-0065-00	00°	SN3500-M10-35	1	-	-	SN5651-LOS-DS-19x15	1	SN5654-PMU-LOS-KS	1
SN5654-PMU-LOS-0065-05	05°	SN3500-M10-35	1	-	-	SN5651-LOS-DS-19x15	1	SN5654-PMU-LOS-KS	1
SN5654-PMU-LOS-0065-10	10°	SN3500-M10-35	1	-	-	SN5651-LOS-DS-19x15	1	-	-
SN5654-PMU-LOS-0065-15	15°	SN3500-M10-35	1	-	-	SN5651-LOS-DS-19x15	1	-	-
SN5654-PMU-LOS-0065-20	20°	SN3500-M10-40	1	-	-	SN5651-LOS-DS-19x15	1	-	-
SN5654-PMU-LOS-0065-25	25°	SN3500-M10-45	1	-	-	SN5651-LOS-DS-19x15	1	-	-

PMU 0090									
SN5654-PMU-LOS-0090-00	00°	SN3500-M10-35	1	-	-	SN5651-LOS-DS-19x15	1	SN5654-PMU-LOS-KS	1
SN5654-PMU-LOS-0090-05	05°	SN3500-M10-35	1	-	-	SN5651-LOS-DS-19x15	1	SN5654-PMU-LOS-KS	1
SN5654-PMU-LOS-0090-10	10°	SN3500-M10-35	1	-	-	SN5651-LOS-DS-19x15	1	-	-
SN5654-PMU-LOS-0090-15	15°	SN3500-M10-35	1	-	-	SN5651-LOS-DS-19x15	1	-	-
SN5654-PMU-LOS-0090-20	20°	SN3500-M10-40	1	-	-	SN5651-LOS-DS-19x15	1	-	-
SN5654-PMU-LOS-0090-25	25°	SN3500-M10-45	1	-	-	SN5651-LOS-DS-19x15	1	-	-

PowerMax Schiebereinheit SN5650-PMU-0065 – SN5650-PMU-0260

Type		Screw	Number	Screw	Number	Locking heel	Number	Ball washer	Number
PMU 0125									
SN5654-PMU-LOS-0125-00	00°	SN3500-M10-35	1	-	-	SN5651-LOS-DS-25x15	1	SN5654-PMU-LOS-KS	1
SN5654-PMU-LOS-0125-05	05°	SN3500-M10-35	1	-	-	SN5651-LOS-DS-25x15	1	SN5654-PMU-LOS-KS	1
SN5654-PMU-LOS-0125-10	10°	SN3500-M10-40	1	-	-	SN5651-LOS-DS-25x15	1	-	-
SN5654-PMU-LOS-0125-15	15°	SN3500-M10-45	1	-	-	SN5651-LOS-DS-25x15	1	-	-
SN5654-PMU-LOS-0125-20	20°	SN3500-M10-55	1	-	-	SN5651-LOS-DS-25x15	1	-	-
SN5654-PMU-LOS-0125-25	25°	SN3500-M10-55	1	-	-	SN5651-LOS-DS-25x15	1	-	-
PMU 0165									
SN5654-PMU-LOS-0165-00	00°	SN3500-M10-35	1	-	-	SN5651-LOS-DS-32x15	1	SN5654-PMU-LOS-KS	1
SN5654-PMU-LOS-0165-05	05°	SN3500-M10-35	1	-	-	SN5651-LOS-DS-32x15	1	SN5654-PMU-LOS-KS	1
SN5654-PMU-LOS-0165-10	10°	SN3500-M10-40	1	-	-	SN5651-LOS-DS-32x15	1	-	-
SN5654-PMU-LOS-0165-15	15°	SN3500-M10-45	1	-	-	SN5651-LOS-DS-32x15	1	-	-
SN5654-PMU-LOS-0165-20	20°	SN3500-M10-55	1	-	-	SN5651-LOS-DS-32x15	1	-	-
SN5654-PMU-LOS-0165-25	25°	SN3500-M10-55	1	-	-	SN5651-LOS-DS-32x15	1	-	-
PMU 0230									
SN5654-PMU-LOS-0230-00	00°	SN3500-M12-40	1	-	-	SN5651-LOS-DS-32x20	1	-	-
SN5654-PMU-LOS-0230-05	05°	SN3500-M12-40	1	-	-	SN5651-LOS-DS-32x20	1	-	-
SN5654-PMU-LOS-0230-10	10°	SN3500-M12-45	1	-	-	SN5651-LOS-DS-32x20	1	-	-
SN5654-PMU-LOS-0230-15	15°	SN3500-M12-50	1	-	-	SN5651-LOS-DS-32x20	1	-	-
SN5654-PMU-LOS-0230-20	20°	SN3500-M12-60	1	-	-	SN5651-LOS-DS-32x20	1	-	-
SN5654-PMU-LOS-0230-25	25°	SN3500-M12-60	1	-	-	SN5651-LOS-DS-32x20	1	-	-
PMU 0260									
SN5654-PMU-LOS-0260-00	00°	SN3500-M12-40	1	-	-	SN5651-LOS-DS-32x20	1	-	-
SN5654-PMU-LOS-0260-05	05°	SN3500-M12-40	1	-	-	SN5651-LOS-DS-32x20	1	-	-
SN5654-PMU-LOS-0260-10	10°	SN3500-M12-45	1	-	-	SN5651-LOS-DS-32x20	1	-	-
SN5654-PMU-LOS-0260-15	15°	SN3500-M12-50	1	-	-	SN5651-LOS-DS-32x20	1	-	-
SN5654-PMU-LOS-0260-20	20°	SN3500-M12-60	1	-	-	SN5651-LOS-DS-32x20	1	-	-
SN5654-PMU-LOS-0260-25	25°	SN3500-M12-60	1	-	-	SN5651-LOS-DS-32x20	1	-	-

PowerMax Schiebereinheit SN5650-PMU-0065 – SN5650-PMU-0260


10.2.1 Information about Lock-Out-System SN5654-LOS

Distribution of force:

The new developed lock out system makes it possible to fix the corresponding standard cam free of play in its front end position. In doing so, the cam body is screwed with the cam reception. The special thing is that the clamping screws act under an angle on the corresponding bearing face.



That means the cam body is once pulled by the divided (resulting) force against the prismatically arranged guide rails and at the same time is pulled against the pressure piece.

Now the cam body is positioned free of play exactly in its front end position and is prepared for additional machining.

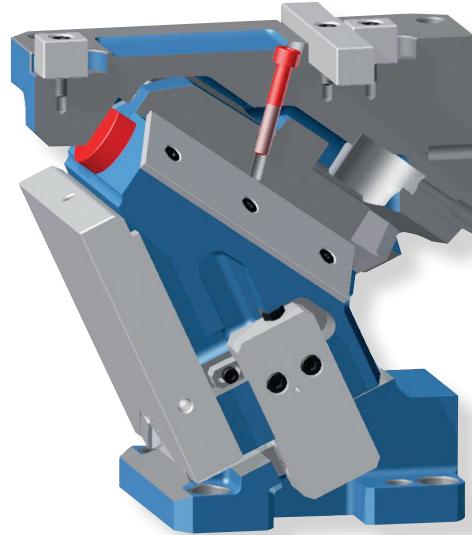

Please consider that the Lock-out-System can only be used in dismounted standard cams.

At the most Power-Max standard cams the fixing holes are partly covered, if the cam body is in the front end position.

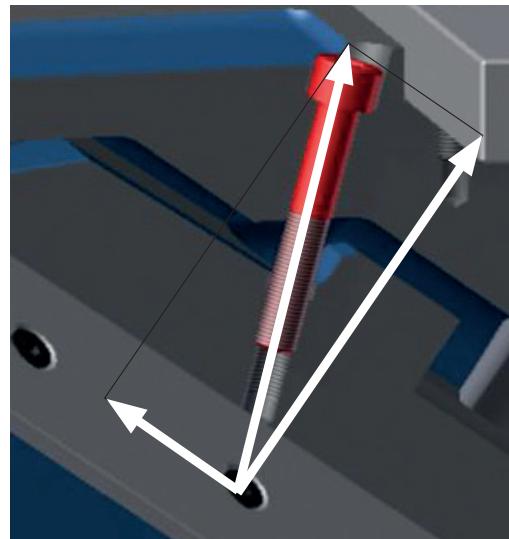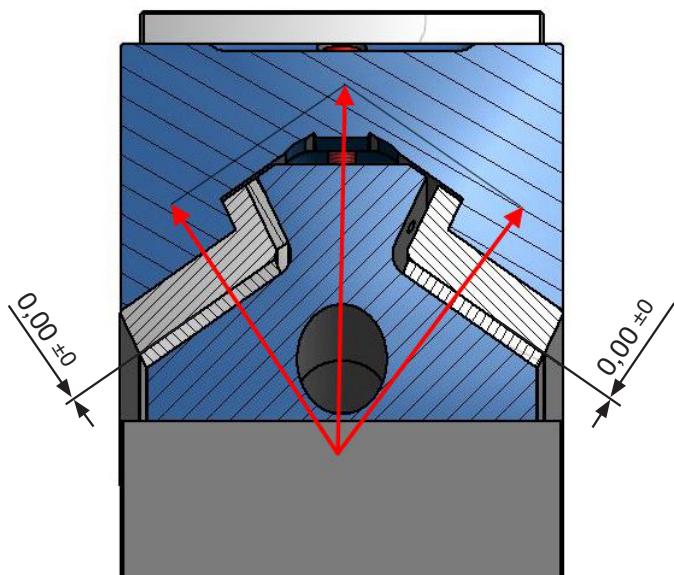

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

11. Dismounting / Mounting of the gas springs


To remove the gas spring out of the cam, at first the safety bolt and the closing plug have to be dismounted.

The mounting is effected in the reverse order. For this the cam slide has to be pushed back to be able to turn the plug in. Afterwards the plug has to be secured with the safety bolt and the washer.




Observe notes on point 8. production!

picture 1

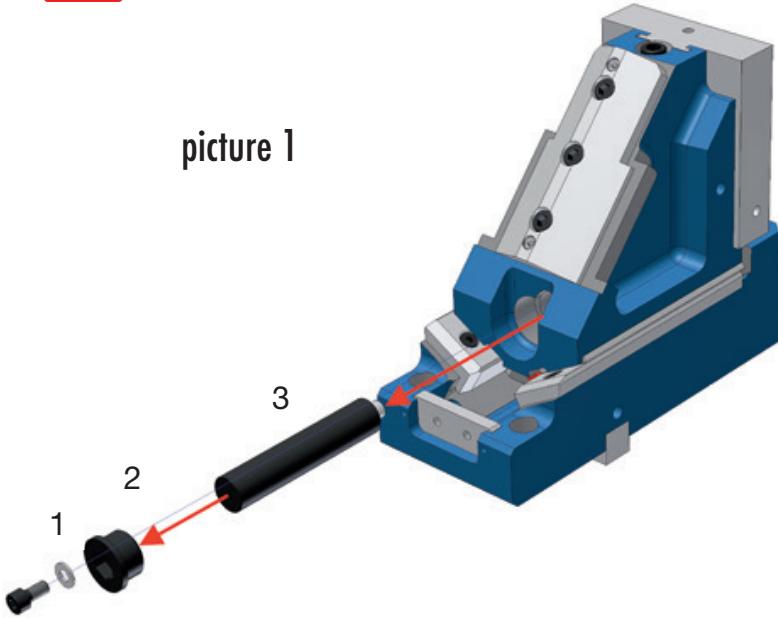

1. Removing of the gas springs

picture 2

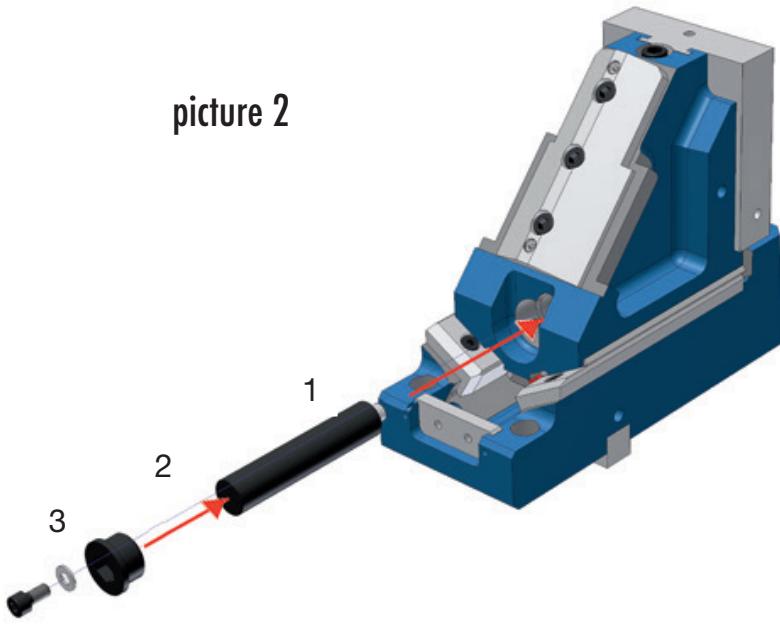

2. Mounting of the gas springs


Insert the gas spring into the hole provided. Screw the sealing plug into the sealing thread. If necessary, lift the slide body for this purpose until the thread of the plug engages.

Place the lock washer in the recess and screw in the screw. Tighten the screw to 33 Nm.


ATTENTION!

Use Loctite 243 medium strength to secure the screw.

To ensure disassembly under the press, do not secure the screw plug with Loctite.

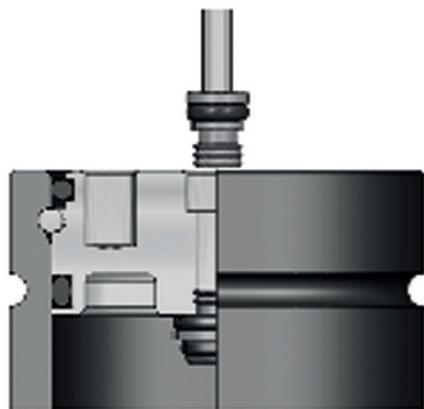PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260**12. Modification of the system pressure of the gas springs****12.1 Discharging of the pressure at a gas spring**

1. If necessary remove the closing plug.

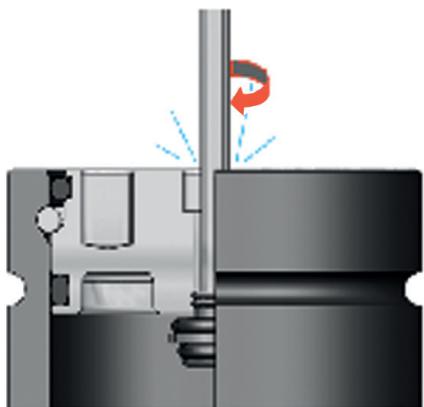


2. To loose the valve, use a 3 mm socket wrench. Turn it to the right till the gas escapes (1-2 turns).



3. As soon as the gas spring is discharged, turn the valve to the left till the initial position is reached. The gas spring is ready to be charged.

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

12.2 Increase of pressure / Charging of a gas spring

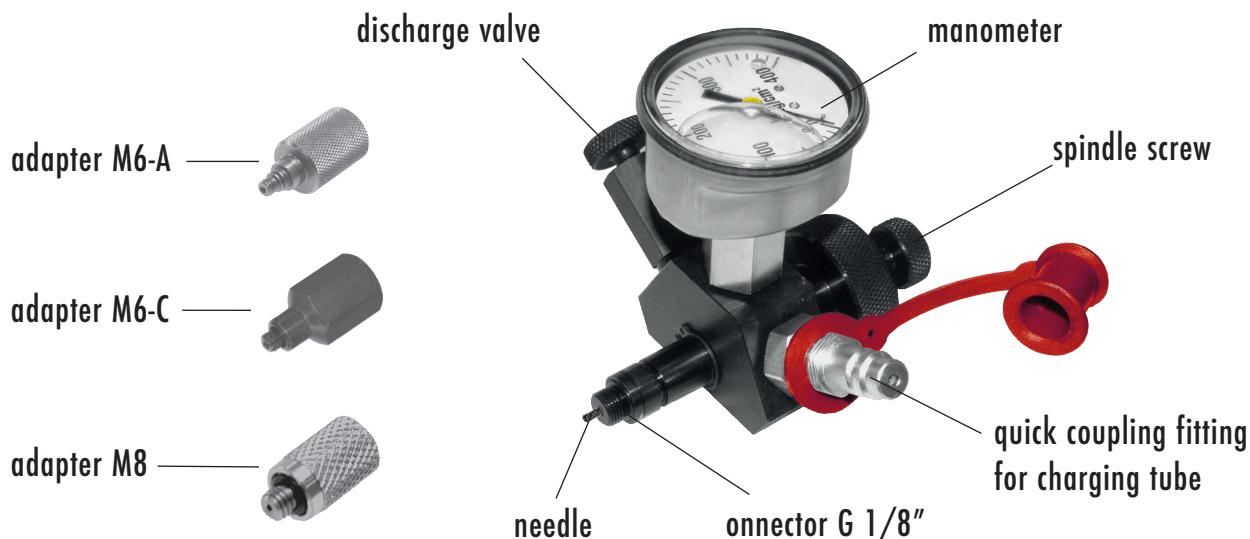

Attention!
Please consider

Minimum pressure 25 bar
Maximum pressure 175 bar

Charging of gas springs

For gas springs with connector thread G1/8":

1. Turn the spindle screw back till the needle ends flush in the centre of the connector G1/8".
2. Turn the charging equipment with the connector G1/8" in the gas spring. Continue with step 3.

For the gas springs with the connecting thread M6-A/M8:

- 2a Turn the adapter M6-A/M8 on the connecting thread G1/8".
- 2b Turn the charging equipment with the connector M6 in the gas spring. Continue with step 3.

3. Plug the coupling of the charging tube to the quick coupling fitting.
4. Open slowly the valve at the charging tube till the manometer shows the desired pressure (close the valve).
5. The valve in the gas spring closes automatically. To discharge the pressure which is still in the charging equipment, turn the screw of the discharging valve slowly till the residual pressure escapes. Finally turn the adjusting screw of the discharging valve immediately back to its initial position.
6. Turn the charging equipment out of the gas spring.

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

Pressure monitoring of gas springs with connecting thread G1/8"

1. Turn the spindle screw back as far as in the centre of the connector G1/8" the needle closes flush (picture 1).
2. Turn the charging equipment with the connector G1/8" in the gas spring.
3. By turning the spindle screw the needle opens the valve in the gas spring and the pressure is indicated at the manometer.

⚠ Pressure monitoring of gas springs with connecting thread M6 is not possible!

Release or reduce pressure at gas springs with connecting thread G1/8"

1. Act as in step 1-3 concerning the pressure monitoring of gas spring with connecting thread G1/8".
2. To release the pressure, which is in the gas spring, turn the screw of the discharge valve slowly in till the pressure escapes or till the desired pressure is indicated at the manometer. Finally turn the adjusting screw of the discharge valve immediately back in the initial position.

⚠ You must be able to press the piston rod down by hand to secure that the gas spring is depressurized! A dismounting of the gas spring may only be effected in a depressurized condition!



picture 1


Release pressure at gas springs with connecting thread M6

1. Gas springs with a connecting thread M6 can't be discharged with the charging equipment SN2967! The needle of the charging equipment can't be turned through the screwed adapter M6-A.
2. Gas springs of the series SN2900 and SN2910-M16 and SN2910-M24 dispose of a disc valve SN2992. Continue with step 5.
3. To release the pressure of a gas spring with thread M6, use the discharging lug SN2955-M6 (picture 2).
4. The valve can be screwed out of the gas spring with the side B.
5. Please act as described in picture 3. To release the pressure turn the disc valve SN2992 in the clockwise direction, one or two turns, till the gas begins to escape. Stop and wait till the gas has escaped. Finally screw the disc valve in anticlockwise direction to close it again (picture 4).


SN2955-M6 discharging lug



picture 2

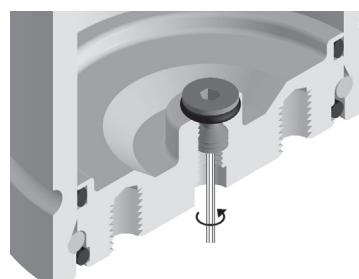

picture 3

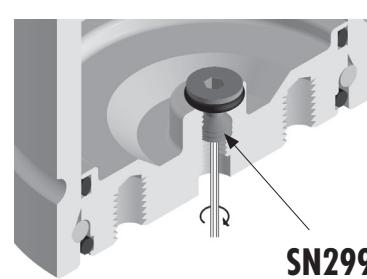

SN2992

picture 4

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

13. Standstill and storing

Standstill

During the standstill of the press no particular precautions have to be taken, which exceed the usual valid regulations at appliances which are actuated with gas springs.

Storing

For the transport or storage of the tool with a mounted **STRACK** nitrogen gas spring system, it is reasonable to discharge the system pressure.



Please consider that, according to the construction, components of the tool, during a longer storing, can uncontrollably be pushed together because of the lowering of the system pressure of the gas springs in the cam units (Accident Prevention Regulation).

Please check the system pressure of the gas spring before restarting the tool. If you have to increase the system pressure, act as described in chapter 11.2.

14. Maintenance

Guide strips out of steel are hardened and normally are not submitted to any wear.

If necessary these strips are adjusted during the mounting in the company **STRACK** to guarantee a low guide clearance.


The fixing screws of these strips are secured with the bolt adhesive **Z9093**.

The guide strips out of bronze with solid lubricant respectively sintered metal are submitted to a greater wear compared with the steel strips.

The strips are produced in a narrow tolerance range. The exchange of these elements is thus effected without a new adjustment. If both guide partners are exchanged, the guide clearance has to be examined and if necessary has to be adjusted newly.


PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

14.1 Adjustment of the active return

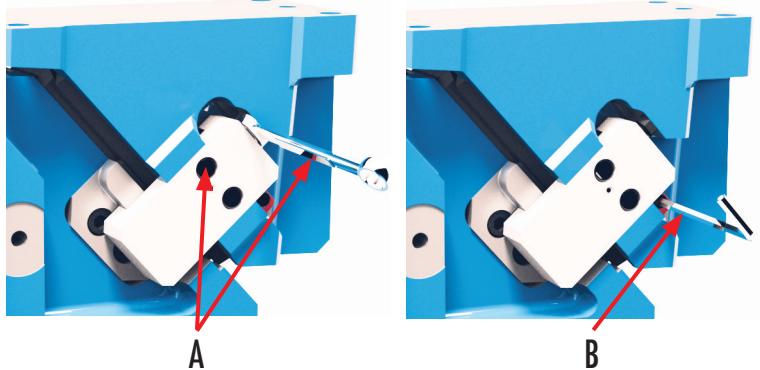


Please ensure that the cam has a secure stand.

Loosen the fixing screws of the active returns (A) and of the adjusting wedge (B).

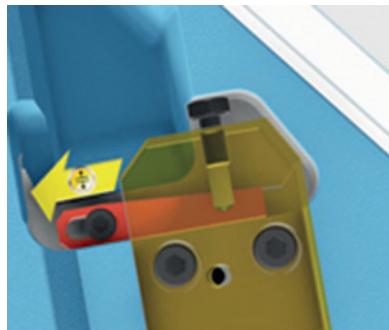


Pull the adjusting wedge back and put the driver on the prism of the cam slide.

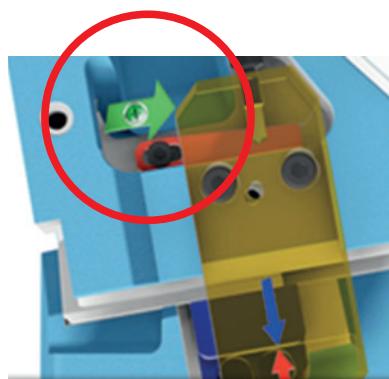

After the installation of the driver on the cam slide push the active returns on the inserts of the driver and fix them by moving the adjusting wedges in the direction of the arrow.

Subsequently fix the screws in the reverse order.

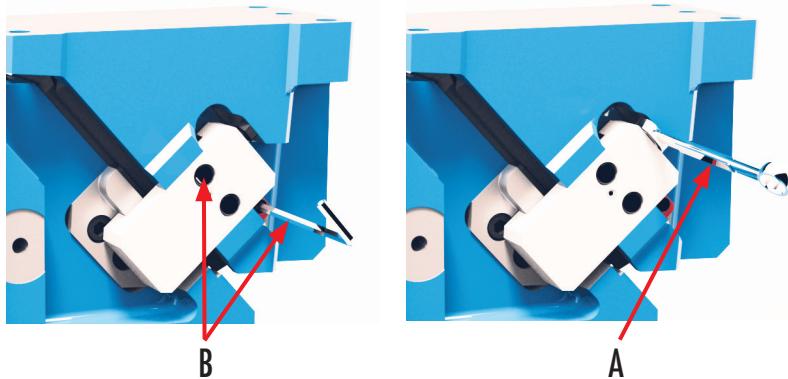

Fix the fastening screws of the adjusting wedges and the active returns, subsequently you secure the active return (A) and control the guide clearance with a 0.01 mm precision calibre band. To avoid a tipping of the driver, both sides should be tightened in the same way.

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

SNS Sintermetall
SNS sintered metal
Métal fritté SNS



Maximale Gleitgeschwindigkeit / Maximal sliding speed /
Vitesse de glissement maximale

40 m/min trocken / dry / sec
80 m/min geschmiert / lubricated / lubrifié

Reibungskoeffizient / Frictional coefficient / Coefficient de frottement

0,05 - 0,15

PV Wert / PV-value / Valeur PV

2950 daN/cm² x m/min

Flächenpressung max. / Surface pressure max. /
Pression superficielle maximale

76 N/mm²

Arbeitstemperatur / Operating temperature /
Température de travail

< 250 °C trocken / dry / sec
< 150 °C geschmiert / lubricated / lubrifié
(in Abhängigkeit vom verwendeten Schmierstoff / dependent from the used
lubrication / dépendant de la lubrification utilisée)

Porösität der Sintergleitfläche / Porosity of the sinter sliding surface /
Porosité de la surface de glissement frittée

15 - 25 %

Integrierter Schmierstoff / Integrated lubricant / Lubrifiant intégré

Fe+Cu+Graphit+MoS2


Schmierstoffanteil / Portion of lubricant / Part du lubrifiant

15 - 20 %


PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

Comparison of application

Bronze with solid lubricant

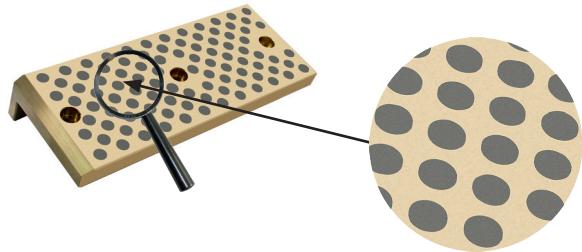

SNS Sinter metal

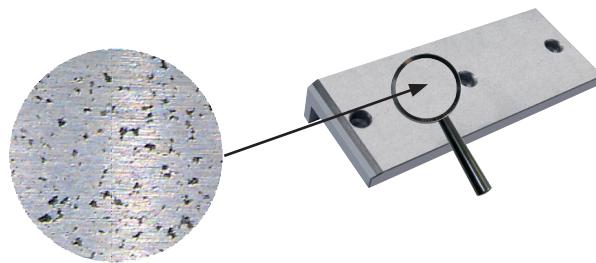

Hints

Please consider the lubrication hints to increase the running life of the low-maintenance sliding elements. The guide plates are always engaged with a sliding partner out of hardened steel. Please absolutely avoid damages of the sliding surfaces by impacts on the sliding face or cants during the mounting/dismounting of the cams. Please look after the cleanliness of the sliding surfaces. Damages or impurities may possibly lead to scuffing marks during operation. To maintain the soft running you should exchange the low-maintenance slide rails when they are damaged. The hardened steel rails are adapted to the respective guide clearance of the cam and should not be exchanged in the normal case. The low-maintenance sliding elements have a high accuracy, so that replacement rails should be introduced without subsequent work. You will receive exact indications and exploded assembly drawings in the Internet under www.strack.de



Low-maintenance sliding elements out of bronze with solid lubricant:

In normal case lubrication is not necessary.

In case of need, lubrication may only be effected with the following lubricants:

The lubricants can also be used for the relubrication of the SNS sinter metal

Company	Oils	max. °C	Fats	max. °C
STRACK	Z9084	240	Z9080	140
AGIP	Rotra ATF	100	Agip GR MU 2	120
BP	Autran DX III	100	Energrease	140
ESSO / Mobil	ATF 320	100	Nebula EP2	120
ESSO / Mobil	ATF 220	100	Beacon EP2	130
Castrol	ATF DEX II	100	Tribol GR 4020 PD	150
SHELL	Spirax S1 ATF TASA	80	Retinax LX	140

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

Application test in the cam of a cutting tool

Bronze with solid lubricant




Test tool



SNS Sinter metal




Counter bearing

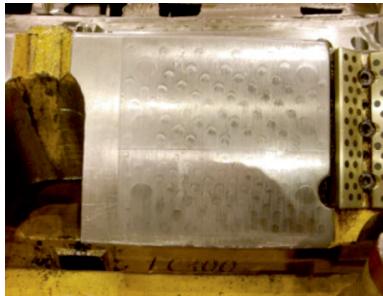

Already after 185.750 parts clear
impressions of up to 0.02 mm in the
counter bearing of the bronze guide rail.

Counter bearing

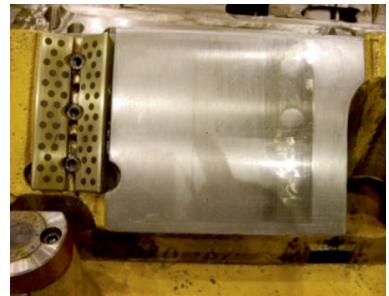

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

15. Appendix

15.1 Internet and CAD

The company **STRACK NORMA** has created an online presence for the PowerMax cam elements which is tailored to the requirements of the constructing engineers.

By using the link www.strack.de you can reach the corresponding homepage.

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

15.2 General description of gas springs

GAS SPRINGS

The gas springs are developed and produced based on the long experience in the nitrogen gas spring research and development.

We understand that the final quality of our product is the individual quality of all its parts, and we therefore painstakingly check each and every one of them.


All the components are subjected to visual and dimensional inspection prior to assembly.

100 % of the gas springs are subjected to dynamic and static gas-proof testing.

All **STRACK** gas springs, thanks to their design, admit maintenance in a quick and simple manner.

Most **STRACK** gas springs have a one-piece construction in all their components, thus eliminating risks of breakage due to material fatigue and therefore also eliminating possible leakage points.

All **STRACK** gas springs are supplied with a quality certificate.

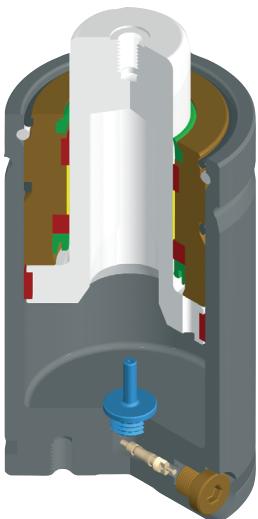


COMPONENT CHARACTERISTICS

Body

Developed in one piece up to strokes of 125 mm. In higher strokes they have a tubular construction with a welded lid. As a difference with other brands, **STRACK** incorporates a threaded joint between the two elements that eliminates the possible fatigue factor in the weld bead.

Stem

Fatigue-resistant steels are employed, which have specific treatments that ensure a long useful life. **STRACK** offers the maximum quality MICROFINISH on the surface of all its stems, thus ensuring a longer service life by reducing friction and wear and tear in the seals..

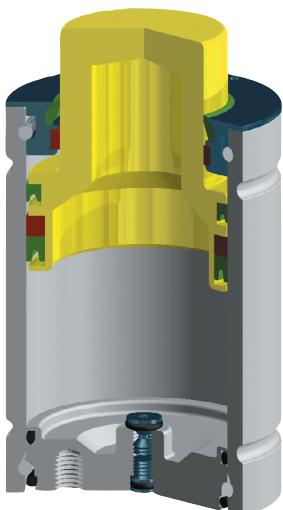


Bushing


It incorporates a scraper, an element that avoids the entrance of filth. All bushings are designed avoiding a metal-to-metal contact, recurring to self-lubricating guiding elements. Reference to gastightness, specific seals are used, which have been painstakingly tested and which offer a high working yield even near their maximum limits of use.

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

15.3 Maximal operating conditions for gas springs

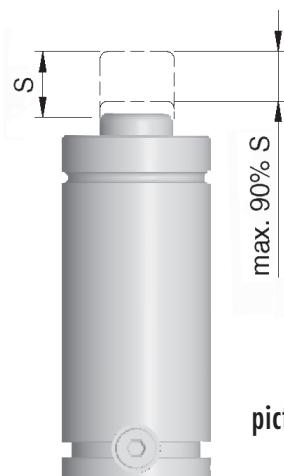

picture 1

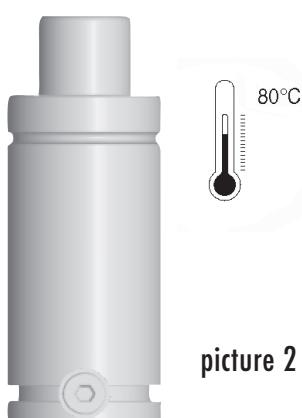

picture 2

Identification

All STRACK gas springs are clearly identified by means of a consistent engraving on the body in accordance with the specification of the European norm (97/23/CE).

Working stroke

The working stroke is maintained invariable during use thanks to a mechanical stop. All STRACK gas springs can work using the whole of their nominal stroke (S) as all models have a stroke reserve. However, in order to reach an optimal service life, it is convenient to design with an optimal safety level. It is therefore recommended to foresee a 10 % stroke reserve. (picture 1)

Working temperature

Maximum working temperature is 80°C. Higher temperatures can damage the gastightness elements, and seriously affect the length of the gas spring service life. (picture 2)

Maximum filling pressure

You should never go over the maximum loading pressure for each gas spring, which is between 150 and 175 bar (at 20°C) depending on each model. Maximum loading pressure is detailed in each model's technical specifications.

Maximum working speed

Maximum lineal working stem speed is variable depending on the type of gas spring. Maximum working speeds are detailed in each model's technical specifications.

Maximum rate

The calculation of maximum rate per minute (N) is calculated following this formula:

$$N = \frac{K}{(2 \times S) + 50}$$

K = Calculation coefficient
(values detailed in the technical specifications for each model)
 S = Working stroke

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

15.4 Calculations gas springs

Initial force

Gas spring initial force is calculated in relation with the working surface and loading force in accordance with the following formula:

$$F_i = A \times P$$

Fi = Initial nominal force in daN
 A = Working area in cm² (as detailed in the specifications of each model)
 P = Loading pressure in Bar

Variation of the initial force

Loading pressure may be modified to vary the initial force of a gas spring.


If we know the initial force, we can use the following formula:

$$P = P_i \times \frac{F}{F_i}$$

P = Pressure wanted (Bar), Pi = Gas spring nominal loading pressure (Bar)
 F = Required initial force (daN), Fi = Gas spring nominal initial force (daN)

Variation of forces depending on the temperature

Gas temperature affects the pressure of gas springs and therefore also their force. The forces specified in the catalogue correspond to loading pressures at a temperature of 20°C. In the temperature/pressure graph it is possible to see how nitrogen pressure varies according to the temperature.

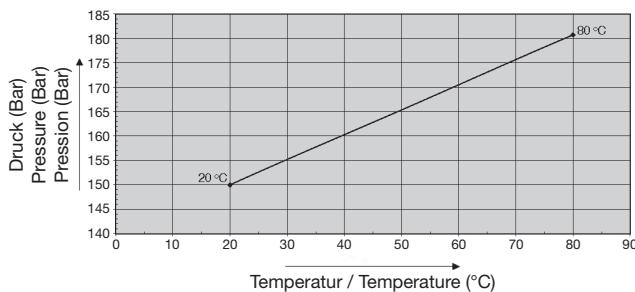

Technical advice

With the purpose of helping our customers we have a technical advice service. By means of this service, you will receive advice from specialised technicians, and all your queries will be answered. We will help you chose the most adequate product depending on the type of work you wish to carry out.

Guarantee and duration

The guarantee that STRACK offers in gas springs is for one year as from the date of acquisition, or the equivalent to a stem lineal displacement of 100,000 metres in gas springs with strokes equal to or over 25 mm. whereas in gas springs with shorter strokes the guarantee is of 2,000,000 cycles.

The guarantee (which covers parts and labour costs) is applicable if and when the following conditions are fulfilled:

1. The gas springs does not present defects due to dents (blows, scratches, welding detachments, rust and so on..).
2. Their application and use has been strictly within the limits of the technical conditions specified, and of the various applicable recommendations.
3. The gas spring has not been manipulated (opening the gas spring cancels the guarantee).

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

15.5 Mounting instructions gas springs



A 10 % nominal stroke reserve should be foreseen to prevent irreparable damage in the gas springs and serious safety hazards.





If possible fix the gas spring on the tool using the attachment holes at the bottom of the body or assembly accessories.


Do not use threaded hole on the stem to fix the gas spring onto the tool.




Do not install the gas spring onto the tool in such a way it makes a free stem ejection possible. The installation of a compressed gas spring is dangerous due to serious safety risks.

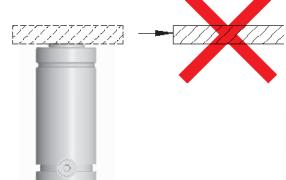

The gas spring is to work completely perpendicularly to the contact surface. Lateral forces reduce the gas spring's service life.



Protect the gas spring from direct contact with liquid pollution: lubricants, cleaners and so on..



Protect the gas spring against mechanical damage or blows, especially the stem. Any imperfection may bring about a loss of pressure.



Service temperature should not exceed 80°C.
Higher temperatures will affect the seals, reducing the gas spring's service life.



Do not exceed maximum filling pressures established for each Gas spring.
Higher pressures will reduce both the gas spring service life and endanger its use.

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

15.6 Filling pressure list gas springs

Gasdruckfedern Gas springs Ressorts à gaz	Fülldruck in bar / Filling pressure in bar / Pression de remplissage en bar															F max. [daN]	P max. [bar]			
	Neindruck Nominal pressure / Pression nominale		Nominalkraft Nominal force / Force nominale																	
	P [bar]	F [daN]	A	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170		
Zylinderkraft in daN bei Fülldruck in bar Cylinder force in daN at filling pressure in bar Force du cylindre en daN à pression de remplissage en bar																				
SN2800-42	150	42	0,28	8	11	14	17	20	22	25	28	31	34	36	39	42		42	150	
SN2800-50	175	50	0,28	8	11	14	17	20	22	25	28	31	34	36	39	42	45	48	49	175
SN2800-100	175	90	0,50	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	88	175
SN2800-200	175	200	1,13	34	45	57	68	79	90	102	113	124	136	147	158	170	181	192	198	175
SN2803-90	175	90	0,50	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	88	175
SN2803-200	175	200	1,13	34	45	57	68	79	90	102	113	124	136	147	158	170	181	192	198	175
SN2805-90	175	90	0,50	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	88	175
SN2805-25-200	175	200	1,13	34	45	57	68	79	90	102	113	124	136	147	158	170	181	192	198	175
SN2805-300	150	300	2,01	60	80	101	121	141	161	181	201	221	241	261	281	302		312	155	
SN2805-450	175	450	2,54	76	102	127	152	178	203	229	254	279	305	330	356	381	406	432	445	175
SN2807-500	190	500	2,54	76	102	127	152	178	203	229	254	279	305	330	356	381	406	432	508	200
SN2807-750	190	750	3,80	114	152	190	228	266	304	342	380	418	456	494	532	570	608	646	760	200
SN2807-920	150	920	6,16	185	246	308	370	431	493	554	616	678	739	801	862	924			924	150
SN2807-1200	150	1200	8,04	241	322	402	482	563	643	724	804	884	965	1045	1126	1206			1206	150
SN2807-2100	150	2100	13,85	416	554	693	831	970	1108	1247	1385	1524	1662	1801	1939	2078			2078	150
SN2807-3000	150	3000	19,63	589	785	982	1178	1374	1570	1767	1963	2159	2356	2552	2748	2945			2945	150
SN2808-90	175	90	0,50	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	88	175
SN2808-V-170	175	170	0,95	29	38	48	57	67	76	86	95	105	114	124	133	143	152	162	166	175
SN2808-275	175	275	1,54	46	62	77	92	108	123	139	154	169	185	200	216	231	246	262	270	175
SN2808-H-275	175	275	1,54	46	62	77	92	108	123	139	154	169	185	200	216	231	246	262	270	175
SN2808-R-275	175	275	1,54	46	62	77	92	108	123	139	154	169	185	200	216	231	246	262	270	175
SN2808-V-350	175	350	2,01	60	80	101	121	141	161	181	201	221	241	261	281	302	322	342	352	175
SN2808-VS-350	175	350	2,01	60	80	101	121	141	161	181	201	221	241	261	281	302	322	342	352	175
SN2808-C-350	175	350	2,01	60	80	101	121	141	161	181	201	221	241	261	281	302	322	342	352	175
SN2808-450	175	450	2,54	76	102	127	152	178	203	229	254	279	305	330	356	381	406	432	445	175
SN2808-H-450	175	450	2,54	76	102	127	152	178	203	229	254	279	305	330	356	381	406	432	457	175
SN2808-R-450	175	450	2,54	76	102	127	152	178	203	229	254	279	305	330	356	381	406	432	457	175
SN2808-V-470	150	470	3,14	94	126	157	188	220	251	283	314	345	377	408	440	471			471	150
SN2808-VS-470	150	470	3,14	94	126	157	188	220	251	283	314	345	377	408	440	471			471	150
SN2808-660	175	660	3,80	114	152	190	228	266	304	342	380	418	456	494	532	570	608	646	665	175
SN2808-H-660	175	660	3,80	114	152	190	228	266	304	342	380	418	456	494	532	570	608	646	684	175
SN2808-R-660	175	660	3,80	114	152	190	228	266	304	342	380	418	456	494	532	570	608	646	684	175
SN2808-800	150	800	4,90	147	196	245	294	343	392	441	490	539	588	637	686	735			735	150
SN2808-V-800	150	740	4,91	147	196	246	295	344	393	442	491	540	589	638	687	737			737	150
SN2808-920	150	920	6,16	185	246	308	370	431	493	554	616	678	739	801	862	924			924	150
SN2808-VS-920	150	920	6,16	185	246	308	370	431	493	554	616	678	739	801	862	924			924	150
SN2808-C-1100	160	1100	7,07	212	283	354	424	495	566	636	707	778	848	919	990	1061	1131		1131	160

Näherungswerte, Abweichungen möglich / Approximate values, tolerances possible / Valeurs approchées, tolérances possibles

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

Filling pressure list gas springs

Gasdruckfedern Gas springs Ressorts à gaz	Fülldruck in bar / Filling pressure in bar / Pression de remplissage en bar															F max. [daN]	P max. [bar]			
	Neindruck Nominal pressure / Pression nominale		Nominalkraft Nominal force / Force nominale																	
	P [bar]	F [daN]	A	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170		
Zylinderkraft in daN bei Fülldruck in bar Cylinder force in daN at filling pressure in bar Force du cylindre en daN à pression de remplissage en bar																				
SN2808-V-1100	160	1100	7,07	212	283	354	424	495	566	636	707	778	848	919	990	1061	1131			
SN2808-C-1500	150	1500	10,18	305	407	509	611	713	814	916	1018	1120	1222	1323	1425	1527				
SN2808-V-1500	150	1500	10,18	305	407	509	611	713	814	916	1018	1120	1222	1323	1425	1527				
SN2808-1900	150	1900	12,57	377	503	629	754	880	1006	1131	1257	1383	1508	1634	1760	1886				
SN2808-2400	150	2400	15,90	477	636	795	954	1113	1272	1431	1590	1749	1908	2067	2226	2385				
SN2808-4250	150	4250	28,27	848	1131	1414	1696	1979	2262	2544	2827	3110	3392	3675	3958	4241				
SN2808-6600	150	6600	44,18	1325	1767	2209	2651	3093	3534	3976	4418	4860	5302	5743	6185	6627				
SN2808-V-6600	150	6600	44,18	1325	1767	2209	2651	3093	3534	3976	4418	4860	5302	5743	6185	6627				
SN2808-9500	150	9500	63,62	1909	2545	3181	3817	4453	5090	5726	6362	6998	7634	8271	8907	9543				
SN2808-20000	150	20000	132,73	3982	5309	6637	7964	9291	10618	11946	13273	14600	15928	17255	18582	19910				
SN2809-200	175	200	1,13	34	45	57	68	79	90	102	113	124	136	147	158	170	181	192	198	175
SN2809-R-200	175	200	1,13	34	45	57	68	79	90	102	113	124	136	147	158	170	181	192	198	175
SN2809-400	155	400	2,54	76	102	127	152	178	203	229	254	279	305	330	356	381			394	155
SN2809-600	155	600	3,80	114	152	190	228	266	304	342	380	418	456	494	532	570			589	155
SN2809-750	150	750	4,90	147	196	245	294	343	392	441	490	539	588	637	686	735			735	150
SN2809-1000	142	1000	7,07	212	283	354	424	495	566	636	707	778	848	919	990	1061			1061	150
SN2809-1500	148	1500	10,17	305	407	509	610	712	814	915	1017	1119	1220	1322	1424	1526			1526	150
SN2809-3000	150	3000	19,63	589	785	982	1178	1374	1570	1767	1963	2159	2356	2552	2748	2945			2945	150
SN2820-200	175	200	1,13	34	45	57	68	79	90	102	113	124	136	147	158	170	181	192	198	175
SN2820-250	142	250	1,77	53	71	89	106	124	142	159	177	195	212	230	248	266			266	150
SN2820-P-300	150	300	2,01	60	80	101	121	141	161	181	201	221	241	261	281	302	322	342	302	150
SN2820-500	150	470	3,14	94	126	157	188	220	251	283	314	345	377	408	440	471			471	150
SN2820-P-500	150	500	3,14	94	126	157	188	220	251	283	314	345	377	408	440	471			471	150
SN2820-750	150	740	4,90	147	196	245	294	343	392	441	490	539	588	637	686	735			735	150
SN2820-C-750	150	740	4,91	147	196	246	295	344	393	442	491	540	589	638	687	737			737	150
SN2820-P-750	150	740	3,14	94	126	157	188	220	251	283	314	345	377	408	440	471			471	150
SN2820-P-1000	142	1000	7,07	212	283	354	424	495	566	636	707	778	848	919	990	1061			1061	150
SN2820-1500	148	1500	10,17	305	407	509	610	712	814	915	1017	1119	1220	1322	1424	1526			1526	150
SN2820-C-1500	148	1500	10,18	305	407	509	611	713	814	916	1018	1120	1222	1323	1425	1527			1527	150
SN2820-P-2400	150	2400	15,90	477	636	795	954	1113	1272	1431	1590	1749	1908	2067	2226	2385			2385	150
SN2820-3000	150	3000	19,63	589	785	982	1178	1374	1570	1767	1963	2159	2356	2552	2748	2945			2945	150
SN2820-C-3000	150	3000	19,63	589	785	982	1178	1374	1570	1767	1963	2159	2356	2552	2748	2945			2945	150
SN2820-P-4200	150	4200	28,27	848	1131	1414	1696	1979	2262	2544	2827	3110	3392	3675	3958	4241			4241	150
SN2820-5000	150	5000	31,18	935	1247	1559	1871	2183	2494	2806	3118	3430	3742	4053	4365	4677			4677	150
SN2820-C-5000	150	5000	33,18	995	1327	1659	1991	2323	2654	2986	3318	3650	3982	4313	4645	4977			4977	150
SN2820-P-6600	147	6600	44,18	1325	1767	2209	2651	3093	3534	3976	4418	4860	5302	5743	6185	6627			6627	150
SN2820-7500	150	7500	50,26	1508	2010	2513	3016	3518	4021	4523	5026	5529	6031	6534	7036	7539			7539	150

Näherungswerte, Abweichungen möglich / Approximate values, tolerances possible / Valeurs approchées, tolérances possibles

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

Filling pressure list gas springs

Gasdruckfedern Gas springs Ressorts à gaz	Fülldruck in bar / Filling pressure in bar / Pression de remplissage en bar															F max. [daN]	P max. [bar]			
	Nomdruck Nominal pressure / Pression nominale		Nomkraft Nominal force / Force nominale																	
	P [bar]	F [daN]	A	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170		
Zylinderkraft in daN bei Fülldruck in bar																				
Cylinder force in daN at filling pressure in bar																				
Force du cylindre en daN à pression de remplissage en bar																				
SN2820-C-7500	150	7500	50,27	1508	2011	2514	3016	3519	4022	4524	5027	5530	6032	6535	7038	7541		7541	150	
SN2820-P-9500	150	9500	63,62	1909	2545	3181	3817	4453	5090	5726	6362	6998	7634	8271	8907	9543		9543	150	
SN2820-A-10000	141	10000	70,88	2126	2835	3544	4253	4962	5670	6379	7088	7797	8506	9214	9923	10632		10632	150	
SN2820-C-10000	141	10000	70,88	2126	2835	3544	4253	4962	5670	6379	7088	7797	8506	9214	9923	10632		10632	150	
SN2825-750	150	750	4,91	147	196	246	295	344	393	442	491	540	589	638	687	736		737	150	
SN2825-1250	175	1250	7,07	212	283	354	424	495	566	636	707	778	848	919	990	1061	1131	1202	1237	175
SN2825-1500	148	1500	10,18	305	407	509	611	713	814	916	1018	1120	1222	1323	1425	1527		1527	150	
SN2825-1800	175	1800	10,18	305	407	509	611	713	814	916	1018	1120	1222	1323	1425	1527	1629	1731	1782	175
SN2825-3000	150	3000	19,63	589	785	982	1178	1374	1570	1767	1963	2159	2356	2552	2748	2945		2945	150	
SN2825-5000	150	5000	33,18	995	1327	1659	1991	2323	2654	2986	3318	3650	3982	4313	4645	4977		4977	150	
SN2830-350	138	350	2,54	76	102	127	152	178	203	229	254	279	305	330	356	381		381	150	
SN2830-500	132	500	3,80	114	152	190	228	266	304	342	380	418	456	494	532	570		570	150	
SN2830-1000	142	1000	7,06	212	282	353	424	494	565	635	706	777	847	918	988	1059		1059	150	
SN2830-1500	148	1500	10,17	305	407	509	610	712	814	915	1017	1119	1220	1322	1424	1526		1526	150	
SN2900-420	133	420	3,14	94	126	157	188	220	251	283	314	345	377	408	440	471		471	150	
SN2900-750	150	750	4,90	147	196	245	294	343	392	441	490	539	588	637	686	735		735	150	
SN2900-7000	139	7000	50,27	1508	2011	2514	3016	3519	4022	4524	5027	5530	6032	6535	7038	7541		7541	150	
SN2900-7500	150	7500	50,26	1508	2010	2513	3016	3518	4021	4523	5026	5529	6031	6534	7036	7539		7539	150	
SN2900-11800	150	11800	78,54	2356	3142	3927	4712	5498	6283	7069	7854	8639	9425	10210	10996	11781		11781	150	
SN2900-18300	150	18300	122,72	3682	4909	6136	7363	8590	9818	11045	12272	13499	14726	15954	17181	18408		18408	150	
SN2901-7500	150	7500	50,26	1508	2010	2513	3016	3518	4021	4523	5026	5529	6031	6534	7036	7539		7539	150	
SN2901-11800	150	11800	78,54	2356	3142	3927	4712	5498	6283	7069	7854	8639	9425	10210	10996	11781		11781	150	
SN2901-18300	150	18300	122,72	3682	4909	6136	7363	8590	9818	11045	12272	13499	14726	15954	17181	18408		18408	150	
SN2902-1000	150	1000	7,07	212	283	354	424	495	566	636	707	778	848	919	990	1061		1061	150	
SN2902-1800	142	1800	12,57	377	503	629	754	880	1006	1131	1257	1383	1508	1634	1760	1886		1886	150	
SN2902-2000	155	2000	12,57	377	503	629	754	880	1006	1131	1257	1383	1508	1634	1760	1886		1948	155	
SN2902-3000	150	3000	19,63	589	785	982	1178	1374	1570	1767	1963	2159	2356	2552	2748	2945		2945	150	
SN2902-4700	150	4700	31,17	935	1247	1559	1870	2182	2494	2805	3117	3429	3740	4052	4364	4676		4676	150	
SN2910-M16	175	50	0,28	8	11	14	17	20	22	25	28	31	34	36	39	42	45	48	49	175
SN2910-M24	175	140	0,78	23	31	39	47	55	62	70	78	86	94	101	109	117	125	133	137	175
SN2910-M28	175	200	1,13	34	45	57	68	79	90	102	113	124	136	147	158	170	181	192	198	175
SN2910-M38x1.5	142	250	1,77	53	71	89	106	124	142	159	177	195	212	230	248	266		266	150	
SN2910-M45	150	750	4,90	147	196	245	294	343	392	441	490	539	588	637	686	735		735	150	
SN2910-M50	142	1000	7,06	212	282	353	424	494	565	635	706	777	847	918	988	1059		1059	150	


Näherungswerte, Abweichungen möglich / Approximate values, tolerances possible / Valeurs approchées, tolérances possibles

PowerMax cam unit SN5650-PM0-0065 – SN5650-PM0-0260

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

16. Exploded view and item list

On the following pages you will find an exploded view and an item list (exemplary) like it can be downloaded on the internet side of the PowerMax cam (www.strack.de)

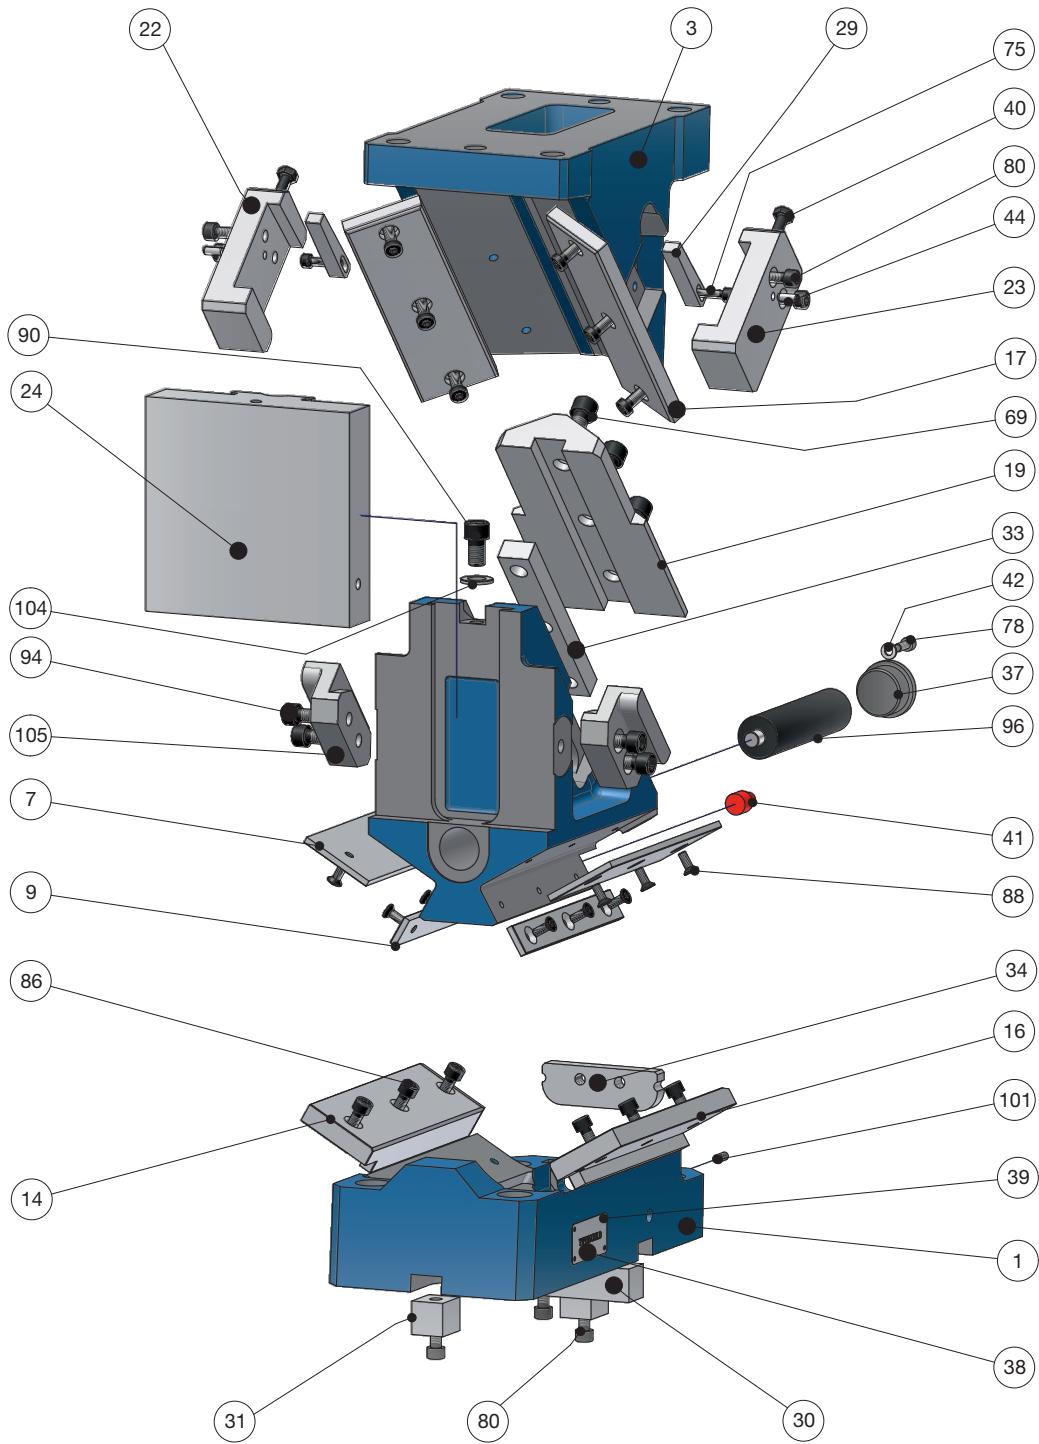

PowerMax cam unit SN5650-PMU-0065 – SN5650-PMU-0260

Stückliste zu /

Partlist to: SN5650-PMU-0165-20-B-N * SN5650-PMU-0165-20-M-N *** SN5650-PMU-0165-20-P-N**

Pos	Stck Piece	Bezeichnung / partname	Art.Nr. / Art.-No.		
			BASIC	MEDIUM	PREMIUM
		Set.Nr. / Set.No.:	222126	222128	222130
1	1	SN5650-PMU-SAF-0165-20-N-V01	225101	225101	225101
2	1	SN5650-PMU-SKF-0165-20-B-V01 SN5650-PMU-SKF-0165-20-M-V01 SN5650-PMU-SKF-0165-20-P-V01	225246	225252	225258
3	1	SN5650-PMU-TF-0165-20-V01	225408	225408	225408
7	2	SN5650-PMU-BS-T4-V01	227023	227023	227023
9	2	SN5650-PMU-BSS-T2-V01	227018	227018	227018
14	1	SN5650-PMU-GSAL-B-T4-V01 SN5650-PMU-GSAL-P-T4-V01 SN5650-PMU-GSAL-P-T4-V01	227040	227045	227045
16	1	SN5650-PMU-GSAR-B-T4-V01 SN5650-PMU-GSAR-P-T4-V01 SN5650-PMU-GSAR-P-T4-V01	227056	227061	227061
17	2	SN5650-PMU-GST-B-T4-V01 SN5650-PMU-GST-P-T4-V01 SN5650-PMU-GST-P-T4-V01	227066	227076	227076
19	1	SN5650-PMU-GTL-T4-V01	227082	227082	227082
22	1	SN5650-PMU-ZWL-B-T4-V01 SN5650-PMU-ZWL-P-T4-V01 SN5650-PMU-ZWL-P-T4-V01	227136	227142	227142
23	1	SN5650-PMU-ZWR-B-T4-V01 SN5650-PMU-ZWR-P-T4-V01 SN5650-PMU-ZWR-P-T4-V01	227148	227154	227154
24	1	SN5650-PMU-AP-T4-V01			227006
29	2	SN5650-PMU-KEZ-T4-V01		227096	227096
30	1	SN5650-PMU-PS1-T4-V01	227102	227102	227102
31	2	SN5650-PMU-PS2-T2-V01	227107	227107	227107
33	1	SN5650-PMU-PST-V01	227111	227111	227111
34	1	SN5650-PMU-SA-T4-V01	227115	227115	227115
37	1	SN5650-PMU-VS-T3-V01	227131	227131	227131
38	1	SN5650-PMU-TYPS-V01	227128	227128	227128
39	4	SN5650-PMU-PN-4-3	227098	227098	227098
40	2	SN5650-PMU-SKS-M8-16	227126	227126	227126
41	2	SN1817-16-25	64791	64791	64791
42	1	SN5650-PMU-SB-M6	227122	227122	227122
44	2	SN1975-6-16	62508	62508	62508
69	3	SN3450-M12-35	62733	62733	62733
75	2	SN3450-M6-25		62688	62688
78	1	SN3450-M8-16	62698	62698	62698
80	7	SN3450-M8-25	62700	62700	62700
86	12	SN3540-M8-20	62607	62607	62607
88	12	SN3550-M6-16	62642	62642	62642
90	1	SN3450-M12-20			62730
94	4	SN3450-M10-20	62714	62714	62714
96	1	SN2820-200-80-4	70274	70274	70274
101	2	SN3600-M6-16	140836	140836	140836
104	1	SN5650-PMU-SB-M12			227121
105	2	SN5650-PMU-EZS-T4-V01	227033	227033	227033

STRACK® NORMALIEN

**STRACK NORMA
GmbH & Co. KG**

Königsberger Str. 11
D-58511 Lüdenscheid
Postfach 16 29
D-58466 Lüdenscheid

Tel +49 2351 8701-0
Fax +49 2351 8701-100
Mail info@strack.de
Web www.strack.de



Management
System
ISO 9001:2015
www.tuv.com
ID 0910092006