



XG-500


Gasdruckfeder Power Line



Grün
Blau
Rot
Gelb
Schwarz




T: < 80 °C

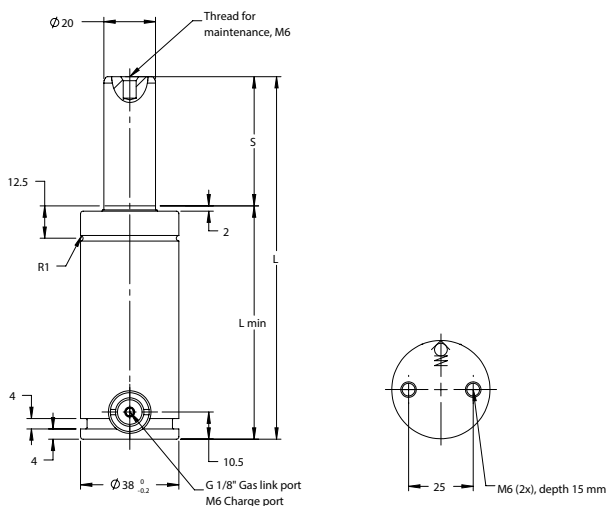

S = Hub

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
10	60	50	470	720	0.33	0.010	XG-500-10
13	66	53	470	710	0.34	0.010	XG-500-13
16	72	56	470	720	0.36	0.020	XG-500-16
19	78	59	470	740	0.37	0.020	XG-500-19
25	90	65	470	730	0.39	0.030	XG-500-25
32	104	72	470	720	0.42	0.030	XG-500-32
38	116	78	470	720	0.44	0.040	XG-500-38
50	140	90	470	720	0.49	0.050	XG-500-50
63	166	103	470	720	0.54	0.060	XG-500-63
75	190	115	470	710	0.58	0.070	XG-500-75
80	200	120	470	710	0.60	0.080	XG-500-80
100	240	140	470	710	0.68	0.10	XG-500-100
125	290	165	470	710	0.77	0.12	XG-500-125

EINBAUVARIANTEN

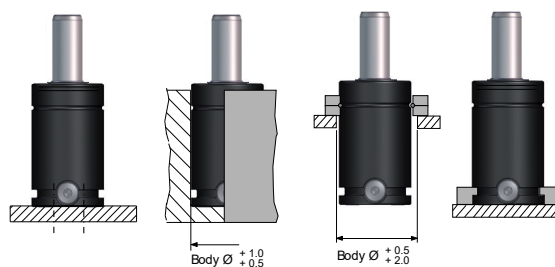

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 50 - 100
Instandhaltungsset	3018846