




SN2811-850

Gasdruckfeder Extra Power

Gas spring Extra Power

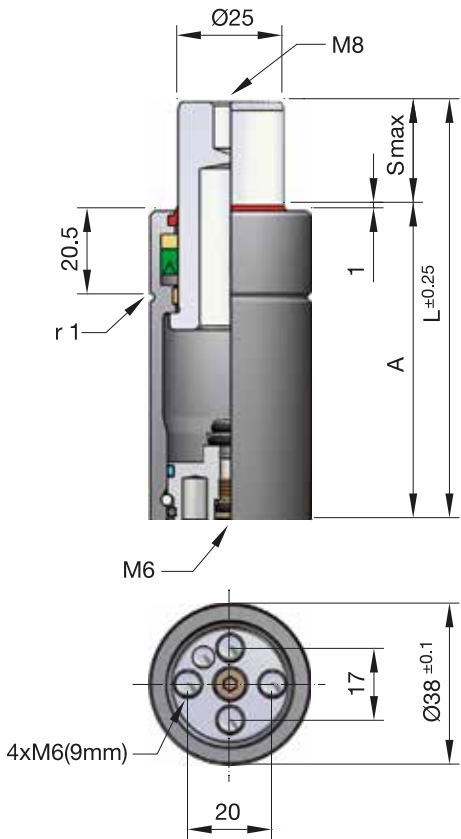


max 80° C



S	A	L	bar	daN1	daN2	Fa	kg	V (l)	Order No.
12	62	74	175	850 (± 5%)	1255	4.91	0.40	0.019	SN2811-850-12
25	75	100	175	850 (± 5%)	1405	4.91	0.45	0.0310	SN2811-850-25
38	92	130	175	850 (± 5%)	1415	4.91	0.52	0.0470	SN2811-850-38
50	105	155	175	850 (± 5%)	1455	4.91	0.64	0.060	SN2811-850-50
63	122	185	175	850 (± 5%)	1450	4.91	0.75	0.076	SN2811-850-63
80	145	225	175	850 (± 5%)	1440	4.91	0.86	0.098	SN2811-850-80

EINBAUVARIANTEN/INSTALLATION VARIANTS

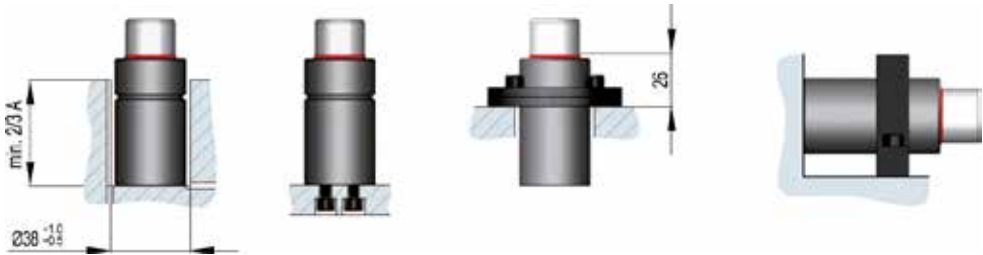



SN2811-850

Gasdruckfeder Extra Power

Gas spring Extra Power

8

Druckmedium	Pressure medium	N2
Max. Fülldruck	Max. filling pressure	175 bar
Min. Fülldruck	Min. filling pressure	35 bar
Max. Betriebstemperatur	Max. working temperature	80 °C
Temperaturabhängige Druckerhöhung	Pressure increase due to temperature	0,33 %/1 °C
Instandhaltungsset	Maintenance kit	SN2990-H850
Max. Kolbengeschwindigkeit	Max. piston speed	25 m/min

