



X-1500


Gasdruckfeder Power Line



Grün
Blau
Rot
Gelb
Schwarz




Norm: VDI 3003
T: < 80 °C

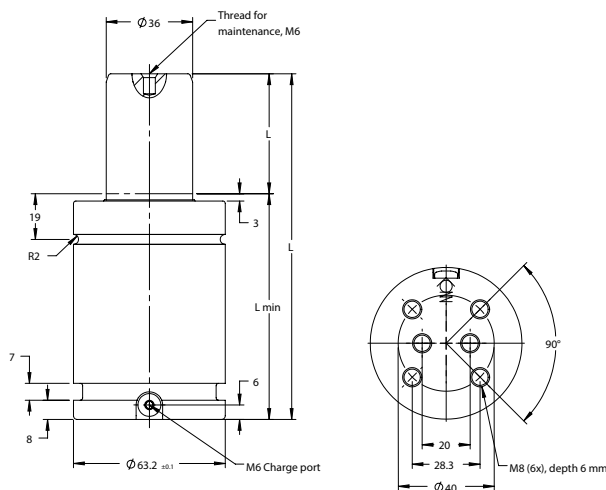 $S = \text{Hub}$

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
13	70	57	1500	2400	0.89	0.050	X-1500-13
16	76	60	1500	2410	0.93	0.060	X-1500-16
19	82	63	1500	2420	0.96	0.070	X-1500-19
25	94	69	1500	2430	1.03	0.080	X-1500-25
32	108	76	1500	2380	1.08	0.11	X-1500-32
38	120	82	1500	2390	1.15	0.12	X-1500-38
50	144	94	1500	2400	1.28	0.15	X-1500-50
63	170	107	1500	2410	1.43	0.19	X-1500-63
75	194	119	1500	2420	1.57	0.22	X-1500-75
80	204	124	1500	2420	1.63	0.24	X-1500-80
100	244	144	1500	2430	1.86	0.29	X-1500-100
125	294	169	1500	2430	2.15	0.36	X-1500-125

EINBAUVARIANTEN

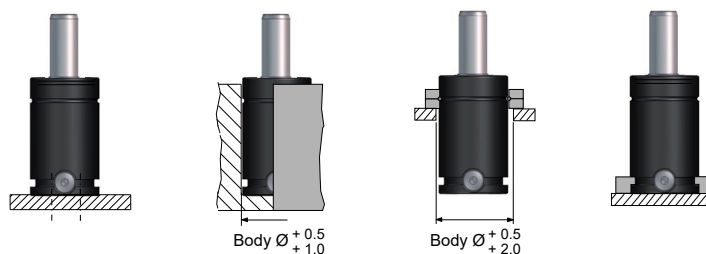

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 15 - 100
Instandhaltungsset	3020434