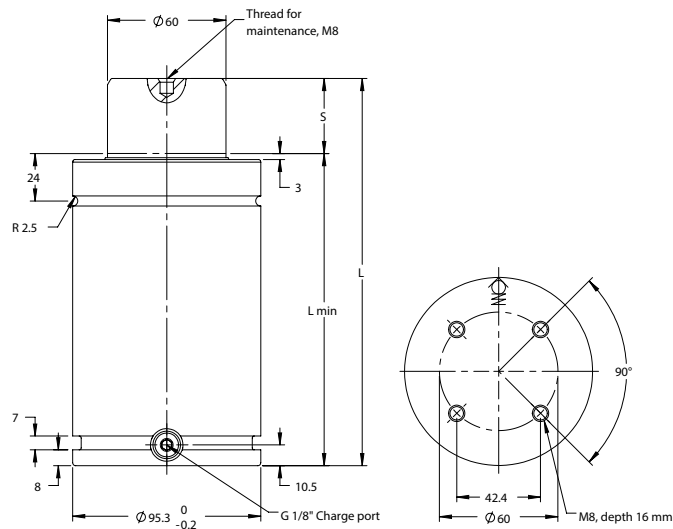




**TX-4200***Gasdruckfeder Power Line -
Heavy Duty*

Grün
Blau
Rot
Gelb
Schwarz

 $S = \text{Hub}$

Norm: VDI 3003
T: < 80 °C

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
25	170	145	4200	5210	5.08	0.43	TX-4200-25
38	196	158	4200	5510	5.41	0.52	TX-4200-38
50	220	170	4200	5720	5.71	0.60	TX-4200-50
63	246	183	4200	5900	6.05	0.68	TX-4200-63
75	270	195	4200	6030	6.35	0.76	TX-4200-75
80	280	200	4200	6080	6.48	0.80	TX-4200-80
100	320	220	4200	6250	6.99	0.93	TX-4200-100
125	370	245	4200	6400	7.63	1.10	TX-4200-125
150	420	270	4200	6510	8.27	1.27	TX-4200-150
160	440	280	4200	6550	8.53	1.33	TX-4200-160
175	470	295	4200	6600	8.91	1.43	TX-4200-175
200	520	320	4200	6680	9.55	1.60	TX-4200-200
250	620	370	4200	6790	11.08	1.93	TX-4200-250
300	720	420	4200	6870	12.11	2.27	TX-4200-300

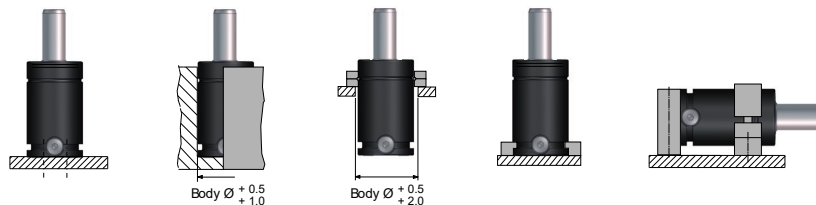EINBAUVARIANTEN

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 40 - 100
Instandhaltungssset	3022953