



MT-24


Gasdruckfeder High Temperature



Grün
Blau
Rot
Gelb
Schwarz




T: < 80 °C

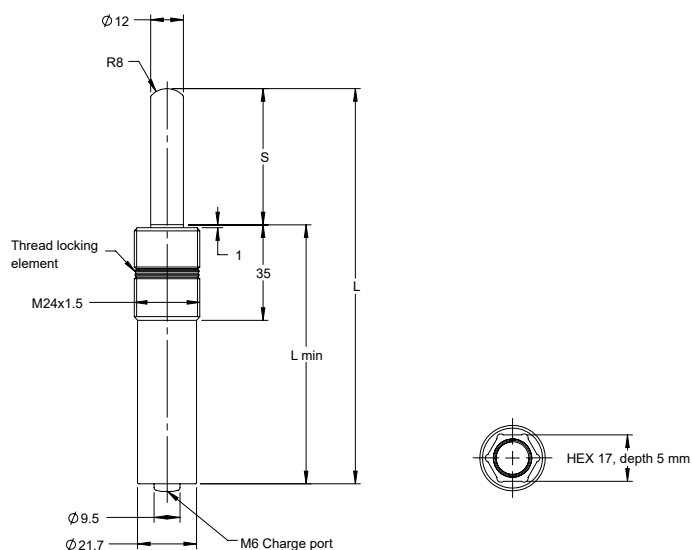 $S = \text{Hub}$

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
10	65	55	170	290	0.06	0.003	MT-24-10
20	85	65	170	290	0.07	0.003	MT-24-20
30	105	75	170	290	0.07	0.003	MT-24-30
40	125	85	170	290	0.08	0.004	MT-24-40
50	145	95	170	290	0.09	0.005	MT-24-50
60	165	105	170	290	0.10	0.006	MT-24-60
70	185	115	170	290	0.11	0.007	MT-24-70
80	205	125	170	290	0.11	0.008	MT-24-80

EINBAUVARIANTEN



Druckmedium	N2
Max. Fülldruck (bei 20° C)	115 - 150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 120° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,0 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 10 - 200
Instandhaltungssatz	-