



SPC-5000

Gasdruckfeder Speed Control



Grün

Blau


Rot

Gelb

Schwarz





T: < 80 °C

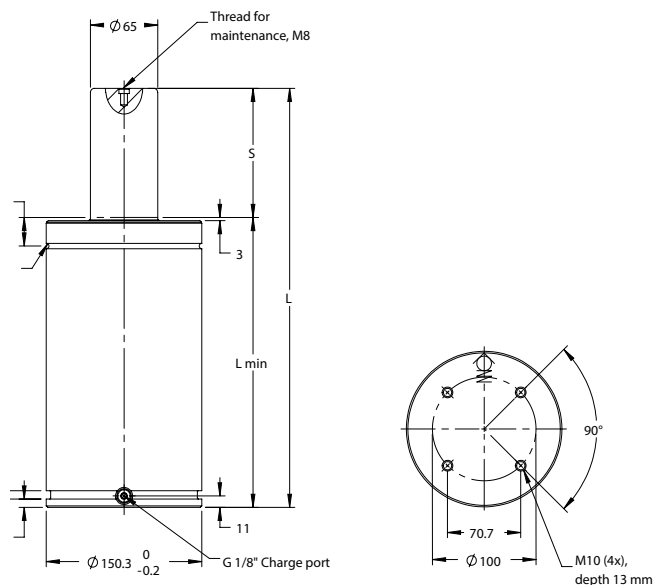

S = Hub

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
125	405	280	5000	6400	26.35	1.90	SPC-5000-125
160	475	315	5000	6500	28.75	2.33	SPC-5000-160
200	555	355	5000	6600	31.50	2.82	SPC-5000-200
250	655	405	5000	6600	34.93	3.43	SPC-5000-250
300	755	455	5000	6600	38.37	4.05	SPC-5000-300

EINBAUVARIANTEN

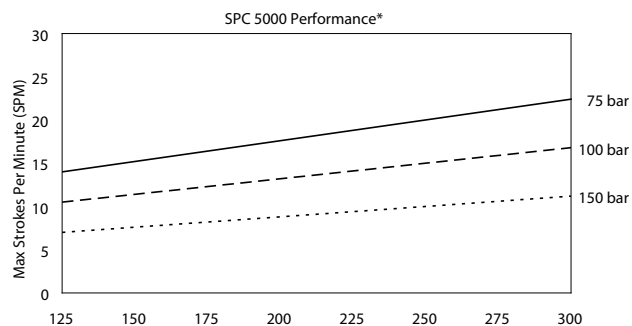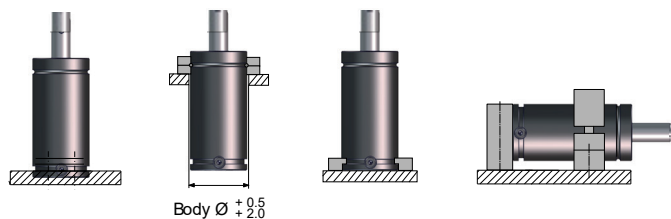

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 7 - 22
Instandhaltungsset	3421497