

**X-4200**

Gasdruckfeder Power Line




8

Grün
Blau
Rot
Gelb
Schwarz




Norm: VDI 3003
T: < 80 °C

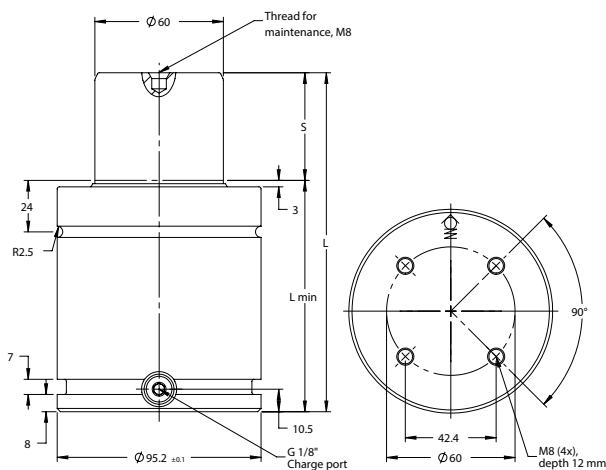 $S = \text{Hub}$

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
16	90	74	4200	6170	2.81	0.15	X-4200-16
19	96	77	4200	6370	2.88	0.18	X-4200-19
25	108	83	4200	6480	2.96	0.26	X-4200-25
32	122	90	4200	6530	3.13	0.30	X-4200-32
38	134	96	4200	6580	3.28	0.32	X-4200-38
50	158	108	4200	6700	3.57	0.40	X-4200-50
63	184	121	4200	6780	4.10	0.49	X-4200-63
75	208	133	4200	6800	4.20	0.58	X-4200-75
80	218	138	4200	6860	4.32	0.61	X-4200-80
100	258	158	4200	6910	4.81	0.74	X-4200-100
125	308	183	4200	6960	5.42	0.91	X-4200-125

EINBAUVARIANTEN

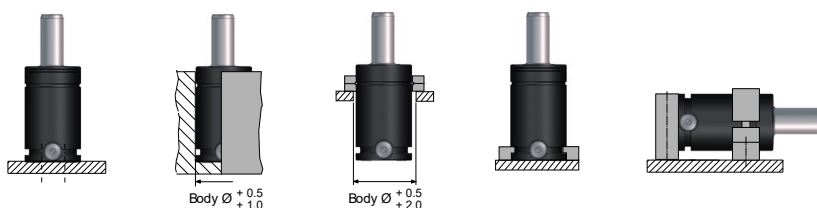

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 30 - 100
Instandhaltungsset	3018849