



SPC-3000


Gasdruckfeder Speed Control



Grün
Blau
Rot
Gelb
Schwarz





T: < 80 °C

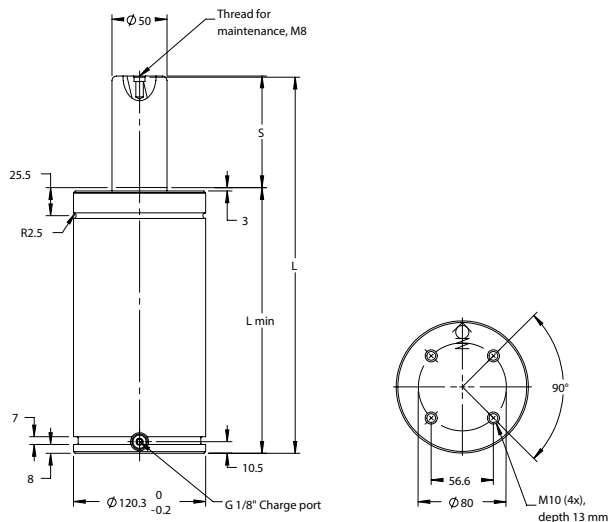

S = Hub

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
125	390	265	3000	3800	10.64	1.15	SPC-3000-125
160	460	300	3000	3800	11.30	1.43	SPC-3000-160
200	540	340	3000	3800	12.06	1.74	SPC-3000-200
250	640	390	3000	3900	13.00	2.14	SPC-3000-250
300	740	440	3000	3900	13.95	2.53	SPC-3000-300

EINBAUVARIANTEN

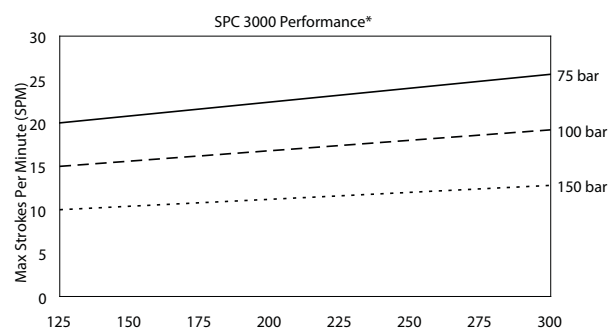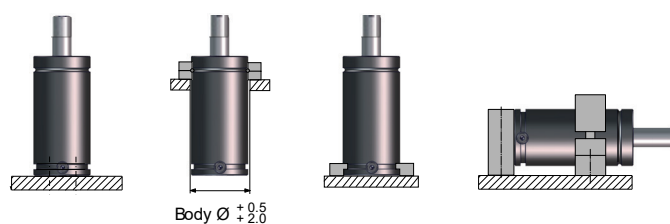

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 10 - 26
Instandhaltungsset	3421496