



XF-2400

Gasdruckfeder




8

Grün
Blau
Rot
Gelb
Schwarz




T: < 80 °C

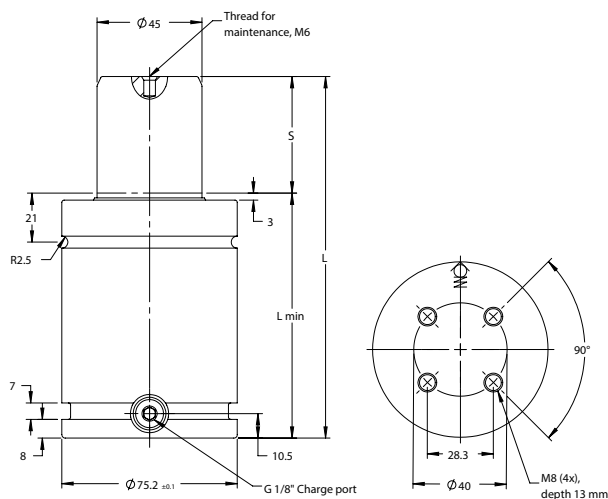

S = Hub

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
16	87	71	2400	3830	1.66	0.090	XF-2400-16
19	93	74	2400	3850	1.71	0.10	XF-2400-19
25	105	80	2400	3870	1.81	0.13	XF-2400-25
32	119	87	2400	3860	1.93	0.16	XF-2400-32
38	131	93	2400	3840	2.03	0.18	XF-2400-38
50	155	105	2400	3920	2.23	0.23	XF-2400-50
63	181	118	2400	3920	2.44	0.28	XF-2400-63
75	205	130	2400	3920	2.64	0.33	XF-2400-75
80	215	135	2400	3920	2.72	0.35	XF-2400-80
100	255	155	2400	3930	3.05	0.43	XF-2400-100
125	305	180	2400	3930	3.47	0.54	XF-2400-125

EINBAUVARIANTEN

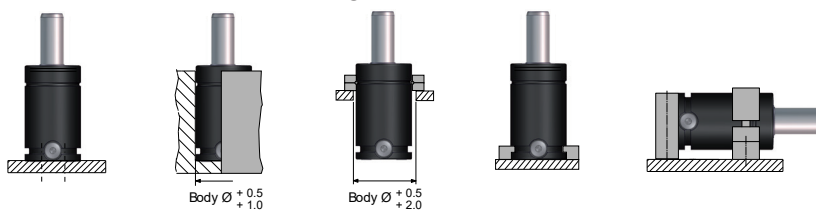

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 40 - 100
Instandhaltungsset	3018848