


**TM-250**

Gasdruckfeder



Grün
Blau
Rot
Gelb
Schwarz

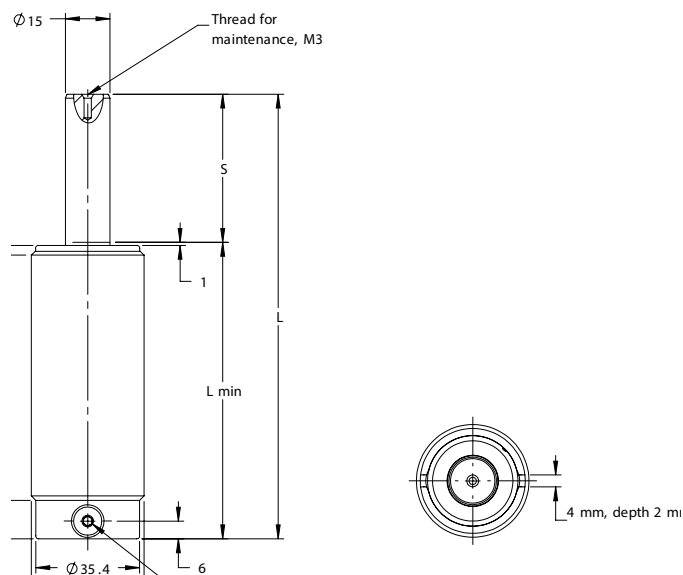


T: < 80 °C

S = Hub

S1	S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
13	12.7	75.4	62.7	265	340	0.37	0.015	TM-250-13
25	25	100	75	265	340	0.42	0.024	TM-250-25
38	38.1	126.2	88.1	265	340	0.47	0.033	TM-250-38
50	50	150	100	265	340	0.52	0.042	TM-250-50
64	63.5	177	113.5	265	350	0.57	0.052	TM-250-64
80	80	210	130	265	350	0.64	0.063	TM-250-80
100	100	250	150	265	350	0.72	0.078	TM-250-100
125	125	300	175	265	350	0.85	0.096	TM-250-125

EINBAUVARIANTEN

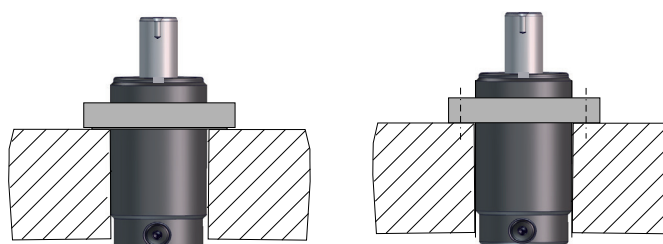

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 80 - 100
Instandhaltungsset	3016873