

**X-320**


Gasdruckfeder Power Line



Grün
Blau
Rot
Gelb
Schwarz




T: < 80 °C

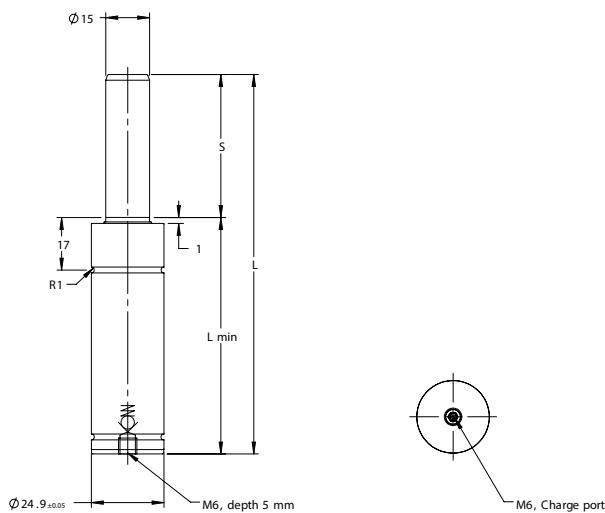

S = Hub

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
7	44	37	320	480	0.10	0.004	X-320-7
10	50	40	320	490	0.11	0.005	X-320-10
15	60	45	320	510	0.12	0.007	X-320-15
19	68	49	320	510	0.13	0.008	X-320-19
25	80	55	320	520	0.14	0.011	X-320-25
32	94	62	320	530	0.15	0.014	X-320-32
38	106	68	320	530	0.16	0.017	X-320-38
50	130	80	320	530	0.19	0.022	X-320-50
63	156	93	320	530	0.21	0.028	X-320-63
75	185	110	320	530	0.24	0.034	X-320-75
80	195	115	320	530	0.25	0.036	X-320-80
100	235	135	320	530	0.29	0.044	X-320-100
125	285	160	320	530	0.33	0.055	X-320-125

EINBAUVARIANTEN

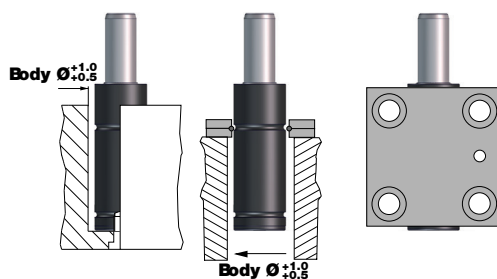

Druckmedium	N2
Max. Fülldruck (bei 20° C)	180 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 50 - 100
Instandhaltungsset	-