




SN2811-1000

Gasdruckfeder Extra Power

Gas spring Extra Power

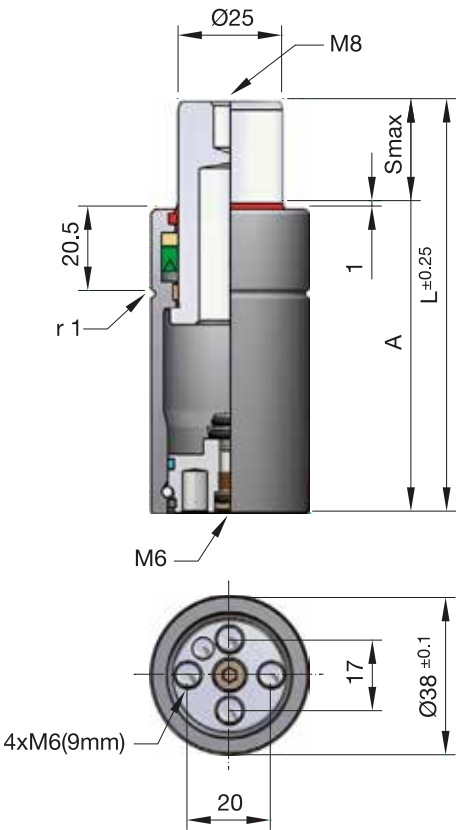


max 80° C



S	A	L	bar	daN1	daN2	Fa	kg	V (l)	Order No.
10	65	75	190	1000 (± 5%)	1280	4.91	0.35	0.023	SN2811-1000-10
15	70	85	190	1000 (± 5%)	1340	4.91	0.42	0.029	SN2811-1000-15
25	80	105	190	1000 (± 5%)	1530	4.91	0.50	0.035	SN2811-1000-25
38	97	135	190	1000 (± 5%)	1570	4.91	0.57	0.052	SN2811-1000-38
50	110	160	190	1000 (± 5%)	1620	4.91	0.69	0.064	SN2811-1000-50
63	142	205	190	1000 (± 5%)	1505	4.91	0.80	0.092	SN2811-1000-63
80	160	240	190	1000 (± 5%)	1560	4.91	0.91	0.110	SN2811-1000-80

EINBAUVARIANTEN/ INSTALLATION VARIANTS

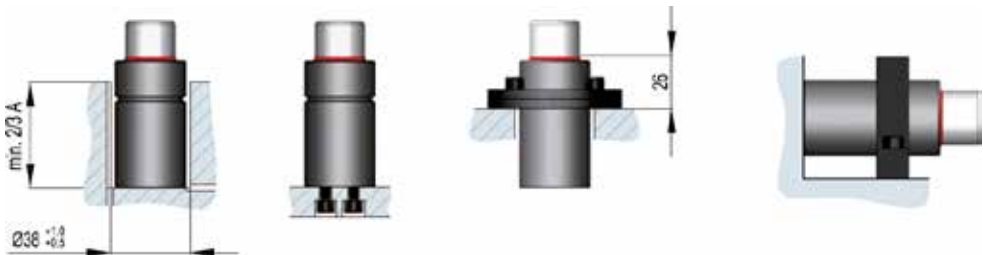



SN2811-1000

Gasdruckfeder Extra Power

Gas spring Extra Power

8

Druckmedium	Pressure medium	N2
Max. Fülldruck	Max. filling pressure	190 bar
Min. Fülldruck	Min. filling pressure	35 bar
Max. Betriebstemperatur	Max. working temperature	80 °C
Temperaturabhängige Druckerhöhung	Pressure increase due to temperature	0,33 %/1 °C
Instandhaltungsset	Maintenance kit	SN2990-H1000
Max. Kolbengeschwindigkeit	Max. piston speed	25 m/min

