




TMS-250

Gasdruckfeder



8

Grün
Blau
Rot
Gelb
Schwarz

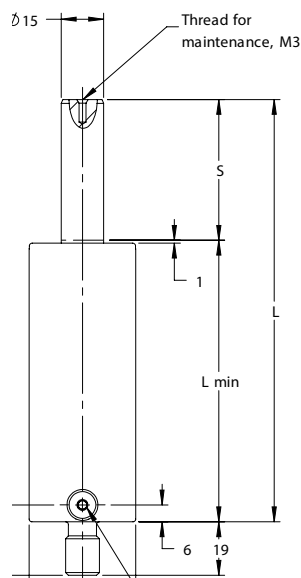


$S = \text{Hub}$

$T: < 80^{\circ}\text{C}$

S1	S	$L \pm 0.25$	$L \text{ min}$	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
13	12.7	75.0	63	265	340	0.45	0.015	TMS-250-13
25	25	100	75	265	340	0.50	0.024	TMS-250-25
38	38.1	126	88	265	340	0.55	0.033	TMS-250-38
50	50	150	100	265	340	0.60	0.042	TMS-250-50
64	63.5	177	114	265	350	0.65	0.052	TMS-250-64
80	80	210	130	265	350	0.70	0.063	TMS-250-80
100	100	250	150	265	350	0.80	0.078	TMS-250-100

EINBAUVARIANTEN



Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 80 - 100
Instandhaltungsset	3016873