




FCN

Halteflansch

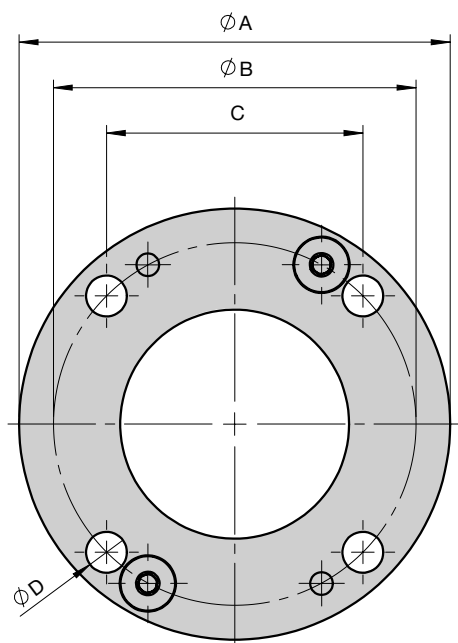

Mat.: St


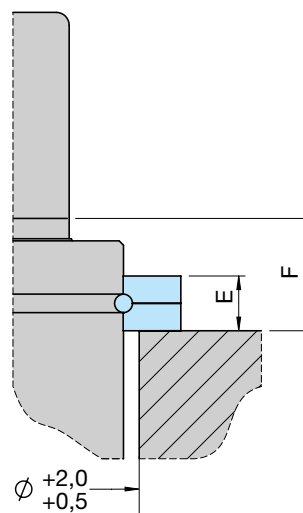


* Montage für dieses Modell

Type	A	B	C	D	E	F	Order No.
150	56	42.0	29.7	9	9	16 (CU4-420)*, 21.5 (M2, X-320)*	FCN-150
250	70	56.6	40.0	9	9	15 (CU4-1000)*, 17 (MT-500, TU-250, X-500, XG-500)*	FCN-250


FCR

Halteflansch

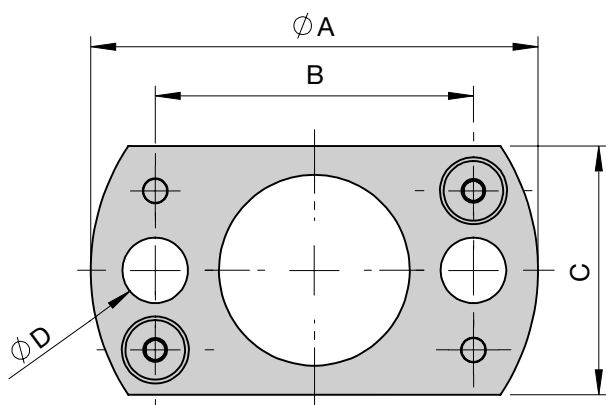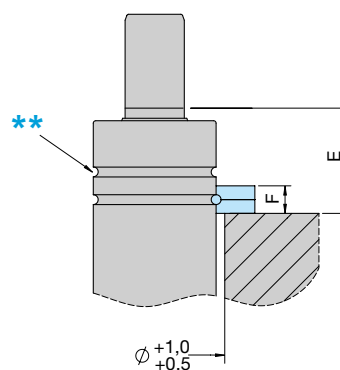
 Mat.: St
 Norm: ISO 11901
 VDI 3003


** Diese Nut darf nicht für die Montage von Gasdruckfedern R-19 und X-170 verwendet werden.

Type	A	B	C	D	E	F	Order No.
12	34	24	21	6.6	21.5	9	FCR-12
15	37	27	24	6.6	21.5	9	FCR-15
19	45	32	25	7	21.5	9	FCR-19
25	50	38	30	7	16 / 21.5*	9	FCR-25

* Je nach Gasdruckfeder