

**XG-750**


Gasdruckfeder Power Line



Grün
Blau
Rot
Gelb
Schwarz




T: < 80 °C

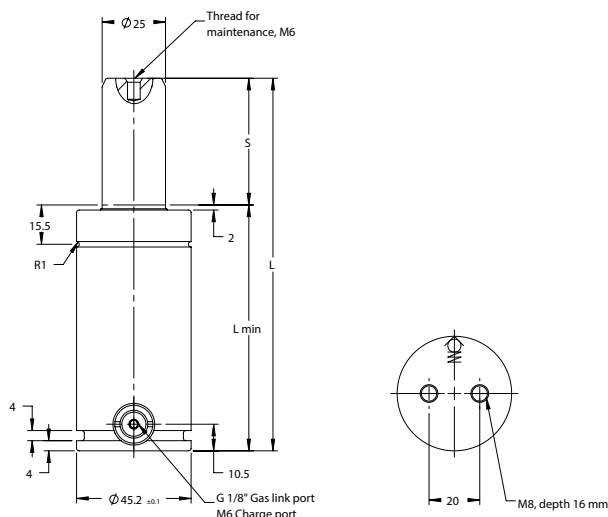 $S = \text{Hub}$

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
10	67	57	740	1210	0.55	0.020	XG-750-10
13	73	60	740	1210	0.55	0.020	XG-750-13
16	79	63	740	1210	0.57	0.030	XG-750-16
19	85	66	740	1170	0.58	0.030	XG-750-19
25	97	72	740	1180	0.62	0.040	XG-750-25
32	111	79	740	1180	0.66	0.050	XG-750-32
38	123	85	740	1180	0.70	0.050	XG-750-38
50	147	97	740	1180	0.78	0.070	XG-750-50
63	173	110	740	1180	0.86	0.090	XG-750-63
75	197	122	740	1190	0.93	0.10	XG-750-75
80	207	127	740	1190	0.97	0.11	XG-750-80
100	247	147	740	1190	1.09	0.13	XG-750-100
125	297	172	740	1190	1.25	0.17	XG-750-125

EINBAUVARIANTEN

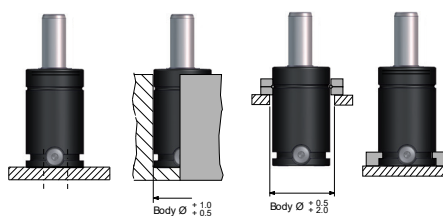

Druckmedium

Max. Fülldruck (bei 20° C)

Min. Fülldruck (bei 20° C)

Betriebstemperatur

Temperaturabhängige Druckerhöhung

Max. Kolbengeschwindigkeit

Empfohlene max Hübe / min (bei 20° C)

Instandhaltungsset

N2

150 bar

25 bar

0° C - 80° C

0,3% / 1° C

1,6 m/s

~ 50 - 100

3019903