


**TX-2400**Gasdruckfeder Power Line -
Heavy Duty

Grün
Blau
Rot
Gelb
Schwarz




Norm: VDI 3003
T: < 80 °C

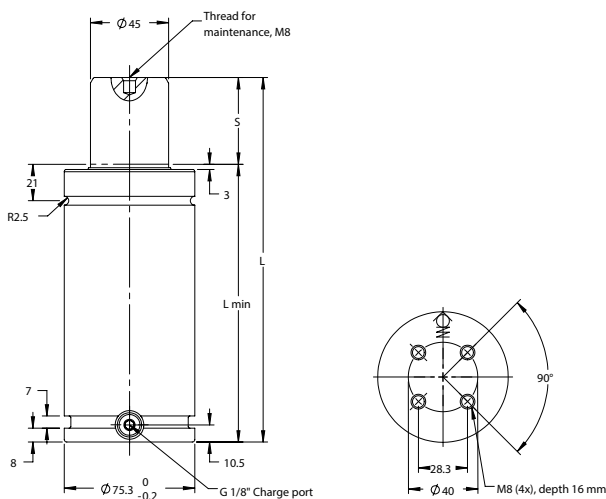

$S = \text{Hub}$

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
25	160	135	2400	3710	3.10	0.23	TX-2400-25
38	186	148	2400	3760	3.31	0.28	TX-2400-38
50	210	160	2400	3790	3.50	0.33	TX-2400-50
63	236	173	2400	3810	3.70	0.38	TX-2400-63
75	260	185	2400	3830	3.89	0.43	TX-2400-75
80	270	190	2400	3830	3.97	0.45	TX-2400-80
100	310	210	2400	3850	4.29	0.53	TX-2400-100
125	360	235	2400	3870	4.68	0.63	TX-2400-125
150	410	260	2400	3880	5.07	0.73	TX-2400-150
160	430	270	2400	3880	5.23	0.77	TX-2400-160
175	460	285	2400	3890	5.47	0.83	TX-2400-175
200	510	310	2400	3890	5.86	0.93	TX-2400-200
250	610	360	2400	3900	6.65	1.17	TX-2400-250
300	710	410	2400	3910	7.44	1.33	TX-2400-300

EINBAUVARIANTEN

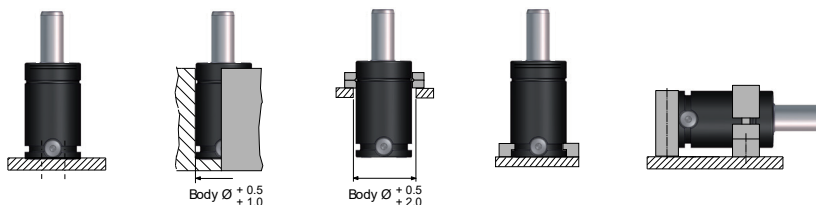

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 40 - 100
Instandhaltungsset	3022952