


### Klinkenzüge

### Latch locks

### Ouvres-moules

DLC 


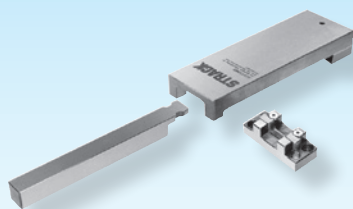


**Z4-12-**

deutsch **6.84-94**  
english **6.95-105**  
français **6.106-116**




Z4-12-Type

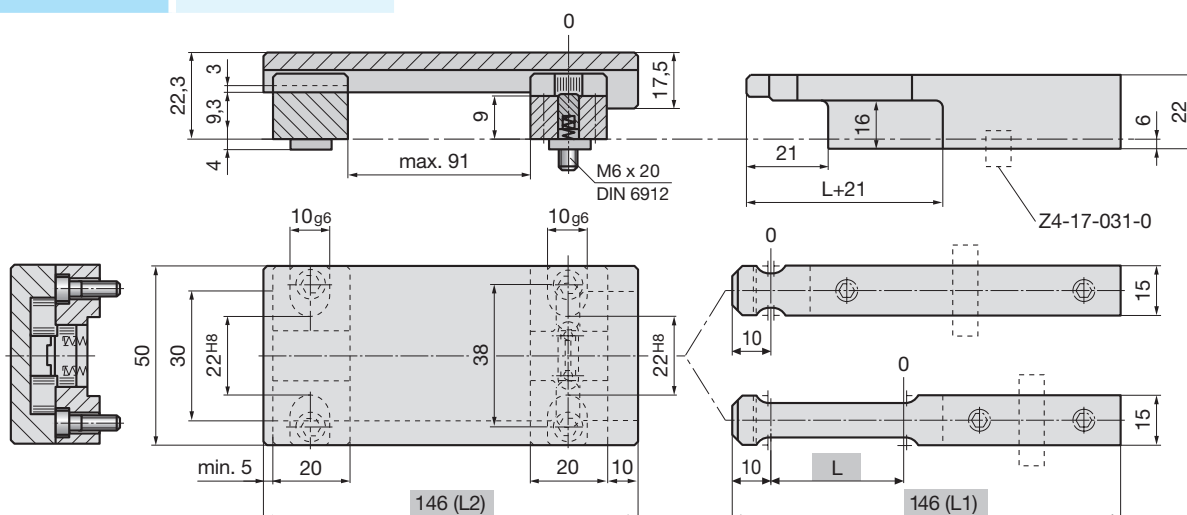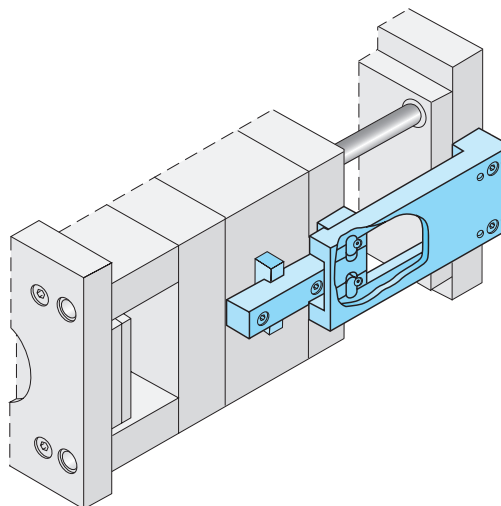

| Type | L  | Type | L  |
|------|----|------|----|
| 0-0  | 0  | 50-0 | 50 |
| 25-0 | 25 | 75-0 | 75 |

Einbaumaße Passfeder  
Installation dimensions of parallel key  
Cotes de montage de clavette

| Type  | X1  | X2  |
|-------|-----|-----|
| Z4-12 | 3,0 | 4,5 |
| Z4-17 | 4,5 | 5,5 |
| Z4-22 | 6,0 | 6,5 |

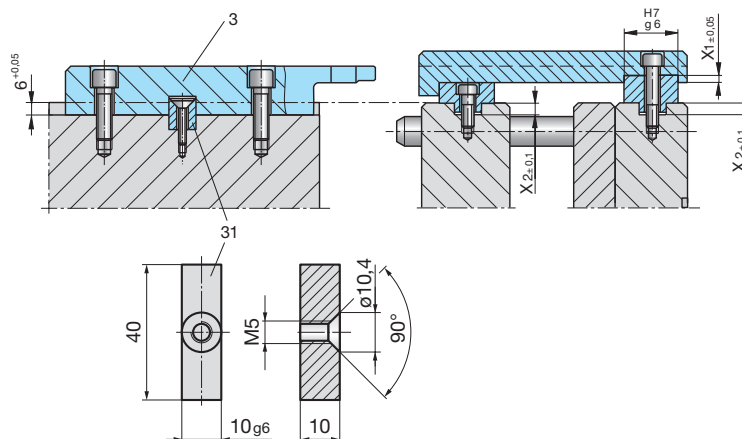

### Klinkenzüge

### Latch locks


### Ouvres-moules

**Z4-17-**

deutsch 6.84-94  
english 6.95-105  
français 6.106-116



Z4-17-Type

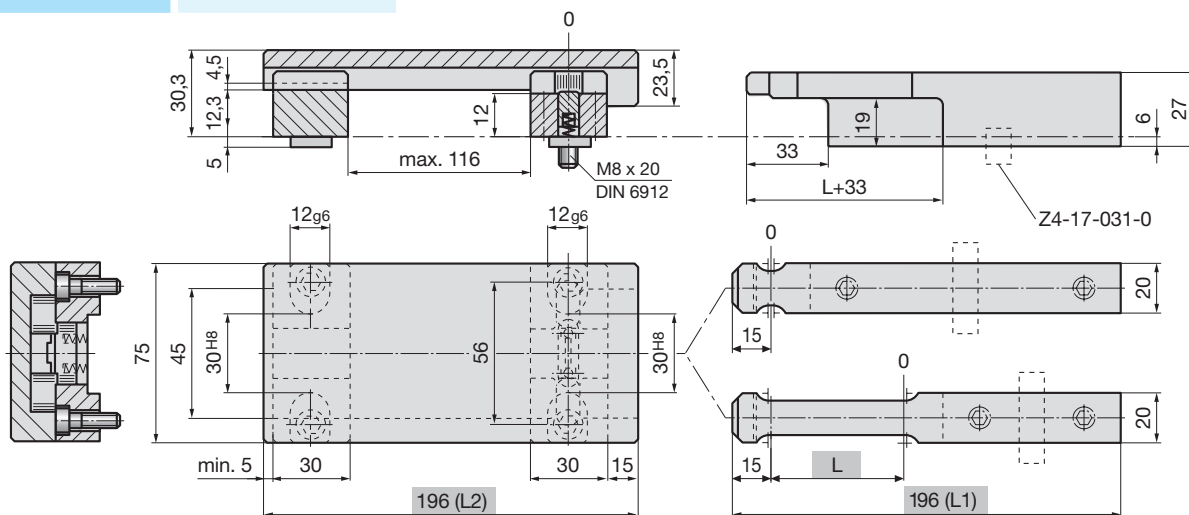

| Type | L  | Type | L  |
|------|----|------|----|
| 0-0  | 0  | 50-0 | 50 |
| 25-0 | 25 | 75-0 | 75 |


6

**Z4-22-**

deutsch 6.84-94  
english 6.95-105  
français 6.106-116



Z4-22-Type

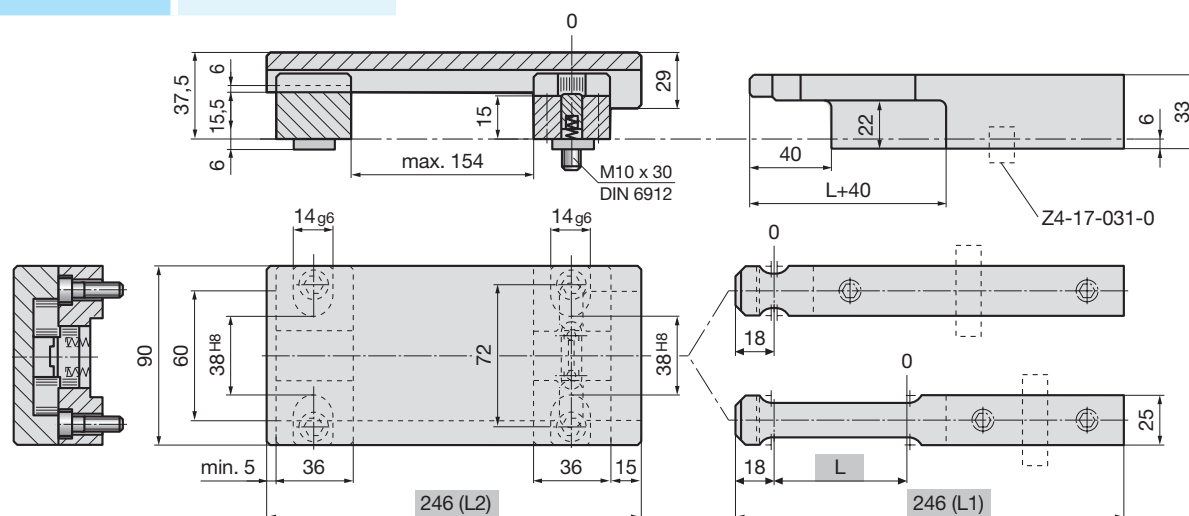

| Type | L  | Type | L  |
|------|----|------|----|
| 0-0  | 0  | 50-0 | 50 |
| 25-0 | 25 | 75-0 | 75 |

D 3002A 07.2018

## Ouvres-moules

**i** deutsch **6.84-94**  
english **6.95-105**  
français **6.106-116**



**i** deutsch **6.84-94**  
english **6.95-105**  
français **6.106-116**



**i** deutsch **6.84-94**  
english **6.95-105**  
français **6.106-116**



\* **i** deutsch **6.80**  
english **6.91**  
français **6.102**



Stückliste  
Parts list  
Liste des pièces

 Z4-12-Type / Z4-17-Type / Z4-22-Type

| Type | Pos.<br>Item<br>Pos. | Stück<br>Quant.<br>Nbr. | Bezeichnung                         | Description                     | Désignation                                  | Mat.-Nr.<br>Mat.-No<br>Mat.Nr. |
|------|----------------------|-------------------------|-------------------------------------|---------------------------------|----------------------------------------------|--------------------------------|
| 011  | 11                   | 1                       | Klinkengehäuse                      | Latch housing                   | Support mobile                               |                                |
| 02   | 2                    | 1                       | Steuerplatte                        | Control plate                   | Plaque support                               | 1.2162 <sup>1)</sup>           |
| 03   | 3                    | 1                       | Zugleiste                           | Latch bar                       | Crochet                                      | 1.2162 <sup>1)</sup>           |
| 031  | 31                   | 1                       | Passfeder                           | Parallel key                    | Clavette                                     | 1.2162 <sup>1)</sup>           |
| 0325 | 325                  | 1                       | Zugleiste m. Verzögerung, L = 25 mm | Latch bar with delay, L = 25 mm | Crochet de traction à retardement, L = 25 mm | 1.2162 <sup>1)</sup>           |
| 0350 | 350                  | 1                       | Zugleiste m. Verzögerung, L = 50 mm | Latch bar with delay, L = 50 mm | Crochet de traction à retardement, L = 50 mm | 1.2162 <sup>1)</sup>           |
| 0375 | 375                  | 1                       | Zugleiste m. Verzögerung, L = 75 mm | Latch bar with delay, L = 75 mm | Crochet de traction à retardement, L = 75 mm | 1.2162 <sup>1)</sup>           |
| 042  | 42                   | 1                       | Traverse                            | Steady                          | Tasseau                                      | 1.1730                         |
| 05   | 5                    | 1                       | Sperre                              | Catch stop                      | Verrou                                       | DLC                            |
| 06   | 6                    | 2                       | Raste                               | Catch                           | Clavette                                     | DLC                            |

<sup>1)</sup> ~ 630 HV10  
Einatzhärtetiefe (Eht)  
Thickness of hardened layer = 0,4 - 0,6 mm  
Épaisseur de la couche durcie

Normalien  
Standard parts  
Elements standard

Z4-12

 Strack Norm

| Strack Norm  | Pos.<br>Item<br>Pos. | Stück<br>Quant.<br>Nbr. | Bezeichnung      | Description       | Désignation                   | Mat.-Nr.<br>Mat.-No<br>Mat.Nr. |
|--------------|----------------------|-------------------------|------------------|-------------------|-------------------------------|--------------------------------|
| SN3550-M3-6  | 61                   | 2                       | Senkschraube     | Countersunk screw | Vis à tête fraisée            | SN                             |
| SN2500-3-12  | 7                    | 2                       | Druckfeder       | Spring            | Ressort de pression du verrou | SN                             |
| SN3540-M6-20 | 8                    | 2                       | Zylinderschraube | Cap screw         | Vis 6 pans creux              | SN                             |

6

Normalien  
Standard parts  
Elements standard

Z4-17

 Strack Norm

| Strack Norm  | Pos.<br>Item<br>Pos. | Stück<br>Quant.<br>Nbr. | Bezeichnung      | Description       | Désignation                   | Mat.-Nr.<br>Mat.-No<br>Mat.Nr. |
|--------------|----------------------|-------------------------|------------------|-------------------|-------------------------------|--------------------------------|
| SN3550-M5-10 | 61                   | 2                       | Senkschraube     | Countersunk screw | Vis à tête fraisée            | SN                             |
| SN2500-3-12  | 7                    | 2                       | Druckfeder       | Spring            | Ressort de pression du verrou | SN                             |
| SN3540-M8-25 | 8                    | 2                       | Zylinderschraube | Cap screw         | Vis 6 pans creux              | SN                             |

Normalien  
Standard parts  
Elements standard

Z4-22

 Strack Norm

| Strack Norm   | Pos.<br>Item<br>Pos. | Stück<br>Quant.<br>Nbr. | Bezeichnung      | Description       | Désignation                   | Mat.-Nr.<br>Mat.-No<br>Mat.Nr. |
|---------------|----------------------|-------------------------|------------------|-------------------|-------------------------------|--------------------------------|
| SN3550-M5-10  | 61                   | 2                       | Senkschraube     | Countersunk screw | Vis à tête fraisée            | SN                             |
| SN2500-5-15   | 7                    | 2                       | Druckfeder       | Spring            | Ressort de pression du verrou | SN                             |
| SN3540-M10-30 | 8                    | 2                       | Zylinderschraube | Cap screw         | Vis 6 pans creux              | SN                             |


D 3002A 07.2018

Klinkenzüge

Latch locks

Ouvres-moules

## CAD-INFO



Z4-x- 0-0  
-25-  
-50-  
-75-

