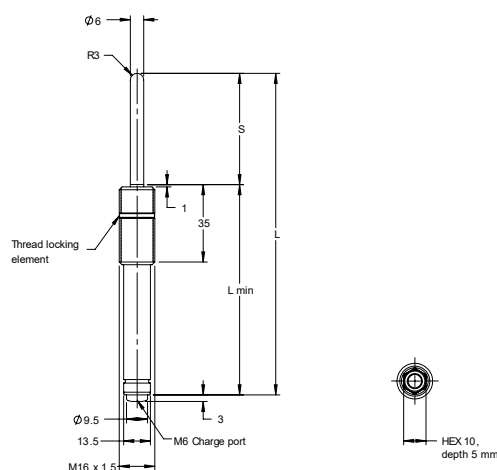



**MT-16***Gasdruckfeder High Temperature*

8

Grün
Blau
Rot
Gelb
Schwarz

 $T: < 80\text{ °C}$  $S = \text{Hub}$

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
10	65	55	42	71.5	0.13	0.003	MT-16-10
20	85	65	42	71.5	0.15	0.006	MT-16-20
30	105	75	42	71.5	0.17	0.008	MT-16-30
40	125	85	42	71.5	0.19	0.011	MT-16-40
50	145	95	42	71.5	0.21	0.012	MT-16-50
60	165	105	42	71.5	0.23	0.014	MT-16-60
70	185	115	42	71.5	0.25	0.017	MT-16-70
80	205	125	42	71.5	0.27	0.019	MT-16-80

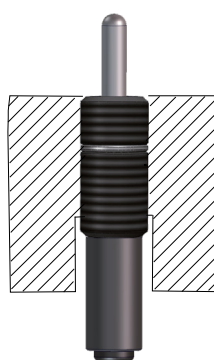EINBAUVARIANTEN

Druckmedium	N2
Max. Fülldruck (bei 20° C)	115-150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 120° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,0 m/s
Empfohlene max Hübe / min (bei 20° C)	~10-20
Instandhaltungsset	-