


**TX-1500**Gasdruckfeder Power Line -
Heavy Duty

8

Grün
Blau
Rot
Gelb
Schwarz




Norm: ISO 11901
T: < 80 °C

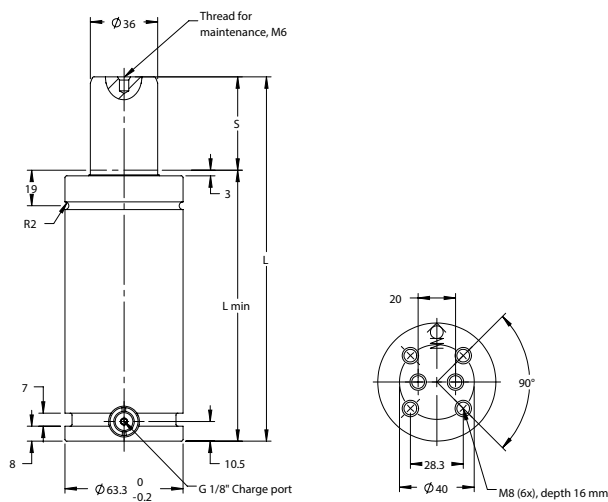

S = Hub

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
13	121	108	1500	1770	1.76	0.10	TX-1500-13
25	145	120	1500	1910	1.89	0.13	TX-1500-25
38	171	133	1500	2000	2.04	0.17	TX-1500-38
50	195	145	1500	2060	2.18	0.20	TX-1500-50
63	221	158	1500	2110	2.33	0.23	TX-1500-63
75	245	170	1500	2150	2.47	0.27	TX-1500-75
80	255	175	1500	2160	2.52	0.28	TX-1500-80
100	295	195	1500	2170	2.76	0.33	TX-1500-100
125	345	220	1500	2240	3.04	0.40	TX-1500-125
150	395	245	1500	2250	3.33	0.47	TX-1500-150
160	415	255	1500	2260	3.44	0.50	TX-1500-160
175	445	270	1500	2260	3.61	0.54	TX-1500-175
200	495	295	1500	2280	3.90	0.60	TX-1500-200
250	595	345	1500	2300	4.47	0.74	TX-1500-250
300	695	395	1500	2320	5.05	0.87	TX-1500-300

EINBAUVARIANTEN

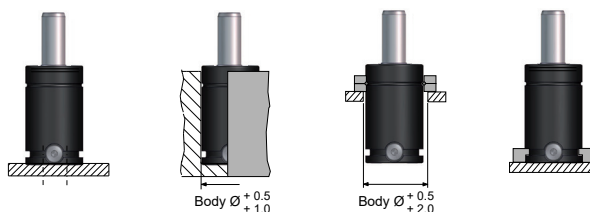

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 15 - 100
Instandhaltungsset	3026202