



SN3885

Prismenführung mit Zwangsrückzug, SNS




Mat.: ST + SNS Sinter

Norm:

VDI 3357


VW-Norm 39D 996

HRB60-HRC20

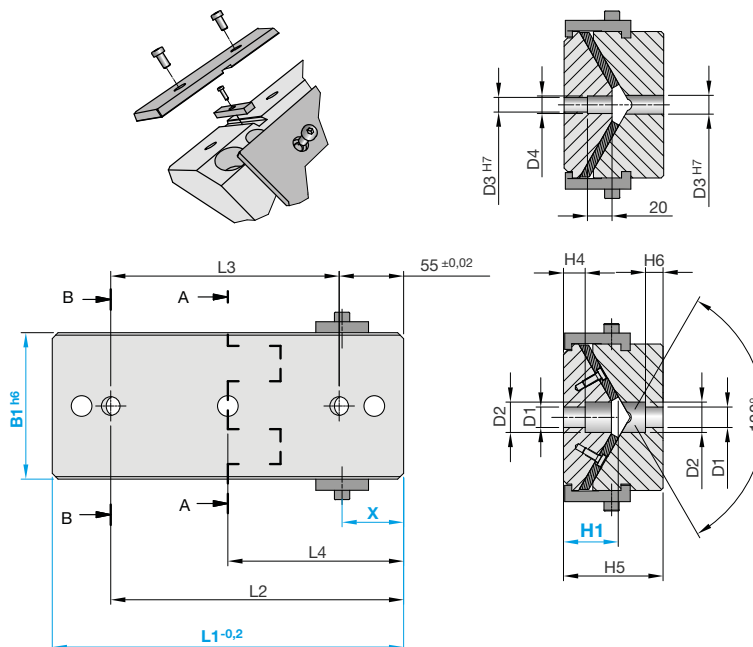

* Abstand X bei Bestellungen angeben

B	H1	L1	X*	D1	D2	D3	D4	H4	H5	H6	L2	L3	L4	Bohrungen	Order No.
65	47	150	25 - 125	13.5	20	12	14	18.0	65	8	125	45	0	2	SN3885-65-47-150-125
65	47	200	25 - 175	13.5	20	12	14	18.0	65	8	175	95	0	2	SN3885-65-47-200-175
65	47	250	25 - 225	13.5	20	12	14	18.0	65	8	225	145	125	3	SN3885-65-47-250-225
65	47	300	25 - 275	13.5	20	12	14	18.0	65	8	275	195	150	3	SN3885-65-47-300-275
125	57	150	25 - 125	17.5	26	16	18	18.5	85	15	125	45	0	2	SN3885-125-57-150-125
125	57	200	25 - 175	17.5	26	16	18	18.5	85	15	175	95	0	2	SN3885-125-57-200-175
125	57	250	25 - 225	17.5	26	16	18	18.5	85	15	225	145	125	3	SN3885-125-57-250-225
125	57	300	25 - 275	17.5	26	16	18	18.5	85	15	275	195	150	3	SN3885-125-57-300-275

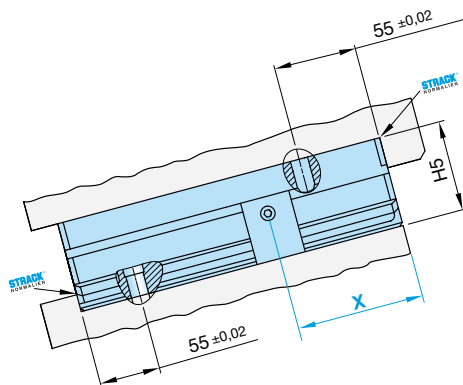

Abmessungen entsprechend VDI 3357