



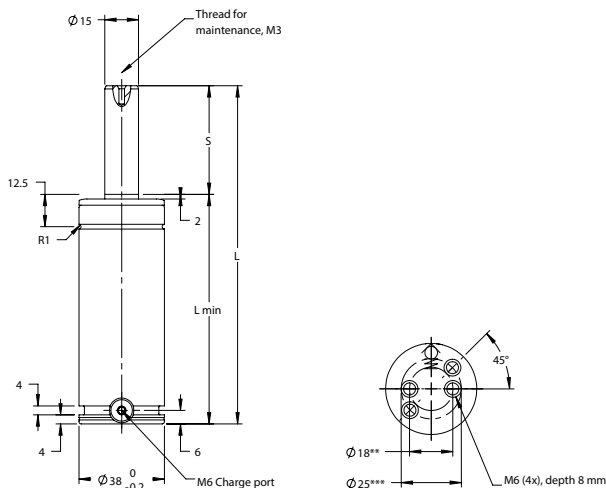
TU-250

Gasdruckfeder Standard Line



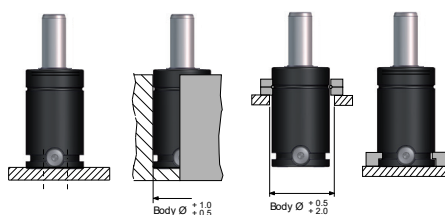
8

 Grün
 Blau
 Rot
 Gelb
 Schwarz

 Norm: VDI 3003
 T: < 80 °C

 $S = \text{Hub}$

S1	S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
10	10	70	60	265	350	0.40	0.011	TU-250-10
13	12.7	75.4	62.7	265	350	0.42	0.013	TU-250-13
16	16	82	66	265	350	0.43	0.016	TU-250-16
25	25	100	75	265	350	0.48	0.023	TU-250-25
38	38.1	126.2	88.1	265	350	0.54	0.032	TU-250-38
50	50	150	100	265	350	0.60	0.041	TU-250-50
64	63.5	177	113.5	265	350	0.67	0.051	TU-250-64
80	80	210	130	265	350	0.75	0.062	TU-250-80
100	100	250	150	265	350	0.85	0.077	TU-250-100
125	125	300	175	265	350	0.97	0.096	TU-250-125

EINBAUVARIANTEN



Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 80 - 100
Instandhaltungsset	3026638