




TX-9500

Gasdruckfeder Power Line -
Heavy Duty

Grün
Blau
Rot
Gelb
Schwarz




Norm: VDI 3003
T: < 80 °C

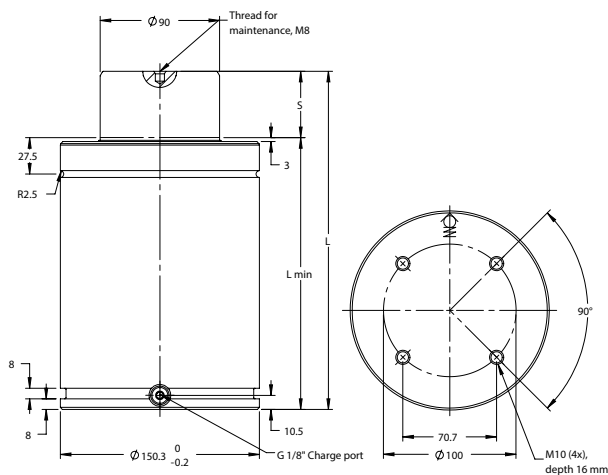

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
25	205	180	9500	11320	16.86	1.09	TX-9500-25
38	231	193	9500	11900	17.70	1.30	TX-9500-38
50	255	205	9500	12330	18.48	1.49	TX-9500-50
63	281	218	9500	12700	19.32	1.69	TX-9500-63
75	305	230	9500	12970	20.10	1.88	TX-9500-75
80	315	235	9500	13080	20.42	1.96	TX-9500-80
100	355	255	9500	13430	31.72	2.28	TX-9500-100
125	405	280	9500	13760	23.35	2.67	TX-9500-125
150	455	305	9500	14020	24.97	3.07	TX-9500-150
160	475	315	9500	14100	25.62	3.23	TX-9500-160
175	505	330	9500	14220	26.59	3.47	TX-9500-175
200	555	355	9500	14380	28.21	3.86	TX-9500-200
250	655	405	9500	14630	31.46	4.65	TX-9500-250
300	755	455	9500	14820	34.70	5.44	TX-9500-300

EINBAUVARIANTEN

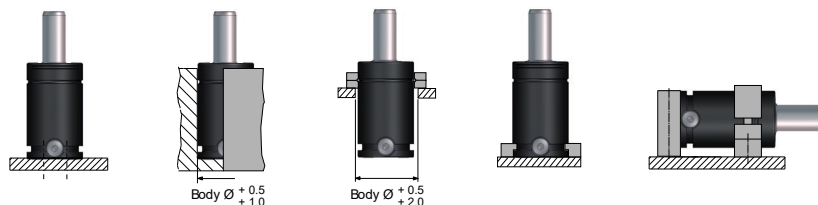

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 30 - 100
Instandhaltungset	3022901