

**XG-4200**


Gasdruckfeder Power Line



Grün  
Blau  
Rot  
Gelb  
Schwarz




T: &lt; 80 °C

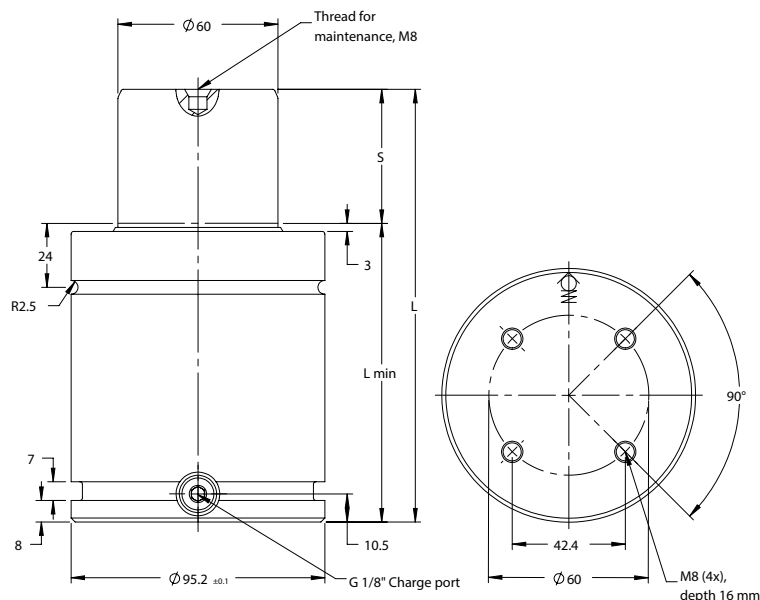

S = Hub

| S   | L ± 0.25 | L min | F1 [daN] | F2 [daN] | m [kg] | V [L] | Order No.   |
|-----|----------|-------|----------|----------|--------|-------|-------------|
| 16  | 94       | 78    | 4200     | 6170     | 2.81   | 0.15  | XG-4200-16  |
| 19  | 100      | 81    | 4200     | 6370     | 2.88   | 0.18  | XG-4200-19  |
| 25  | 112      | 87    | 4200     | 6480     | 2.96   | 0.26  | XG-4200-25  |
| 32  | 126      | 94    | 4200     | 6430     | 3.13   | 0.30  | XG-4200-32  |
| 38  | 138      | 100   | 4200     | 6580     | 3.28   | 0.32  | XG-4200-38  |
| 50  | 162      | 112   | 4200     | 6700     | 3.57   | 0.40  | XG-4200-50  |
| 63  | 188      | 125   | 4200     | 6780     | 4.10   | 0.49  | XG-4200-63  |
| 75  | 212      | 137   | 4200     | 6800     | 4.20   | 0.58  | XG-4200-75  |
| 80  | 222      | 142   | 4200     | 6860     | 4.32   | 0.61  | XG-4200-80  |
| 100 | 262      | 162   | 4200     | 6910     | 4.81   | 0.74  | XG-4200-100 |
| 125 | 312      | 187   | 4200     | 6960     | 5.42   | 0.91  | XG-4200-125 |

## EINBAUVARIANTEN

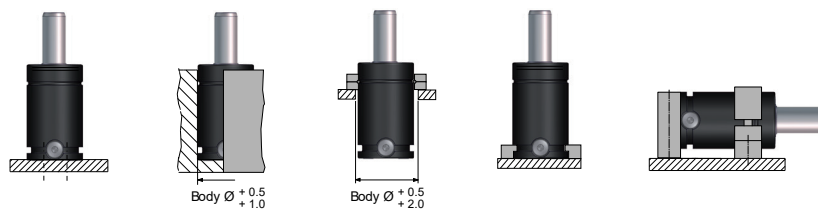

Druckmedium

N2

Max. Fülldruck (bei 20° C)

150 bar

Min. Fülldruck (bei 20° C)

25 bar

Betriebstemperatur

0° C - 80° C

Temperaturabhängige Druckerhöhung

0,3% / 1° C

Max. Kolbengeschwindigkeit

1,6 m/s

Empfohlene max Hübe / min (bei 20° C)

~ 30 - 100

Instandhaltungsset

3018849