

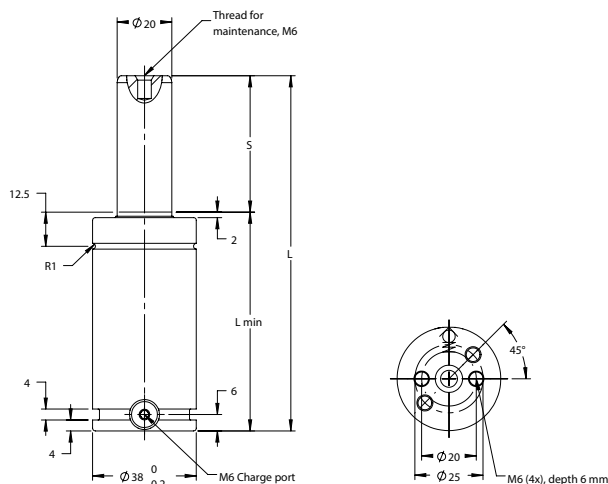
**MT-500***Gasdruckfeder High Temperature*

8

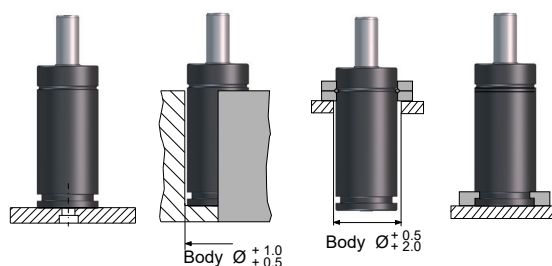
Grün
Blau
Rot
Gelb
Schwarz



T: < 80 °C

 $S = \text{Hub}$

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
10	50	40	470	720	0.25	0.010	MT-500-10
10	50	40	470	720	0.25	0.010	MT-500-10
13	56	43	470	710	0.26	0.010	MT-500-13
16	62	46	470	720	0.27	0.020	MT-500-16
19	68	49	470	740	0.28	0.020	MT-500-19
25	80	55	470	730	0.31	0.030	MT-500-25
32	94	62	470	720	0.34	0.030	MT-500-32
38	106	68	470	720	0.36	0.040	MT-500-38
50	130	80	470	720	0.40	0.050	MT-500-50
63	156	93	470	720	0.45	0.060	MT-500-63
75	180	105	470	710	0.50	0.070	MT-500-75
80	190	110	470	710	0.52	0.080	MT-500-80

EINBAUVARIANTEN

Druckmedium	N2
Max. Fülldruck (bei 20° C)	115 - 150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 120° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,0 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 10 - 20
Instandhaltungsset	3022687