



MC3-SP

Gasdruckfeder





8

Grün
 Blau
 Rot
 Gelb
 Schwarz



T: < 80 °C

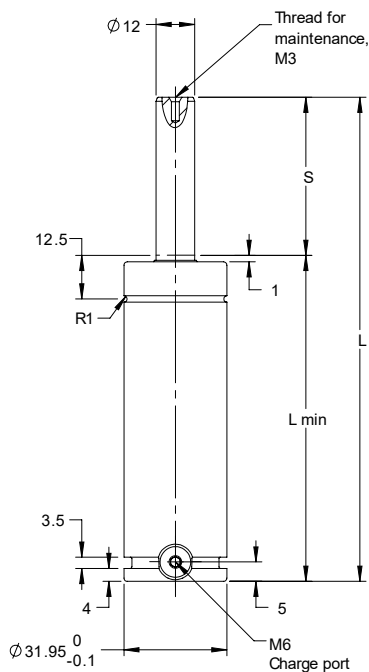


S = Hub

S	Type	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
10	3	70	60	150	230	0.30	0.005	MC3-SP-10-3
10	5	70	60	200	306	0.30	0.005	MC3-SP-10-5
12.7	3	75.4	62.7	150	230	0.31	0.006	MC3-SP-12.7-3
12.7	5	75.4	62.7	200	307	0.31	0.006	MC3-SP-12.7-5
16	3	82	66	150	231	0.33	0.007	MC3-SP-16-3
16	5	82	66	200	307	0.33	0.007	MC3-SP-16-5
25	3	100	75	150	231	0.38	0.010	MC3-SP-25-3
25	5	100	75	200	308	0.38	0.010	MC3-SP-25-5
38.1	3	126.2	88.1	150	232	0.43	0.015	MC3-SP-38.1-3
38.1	5	126.2	88.1	200	309	0.43	0.015	MC3-SP-38.1-5
50	3	150	100	150	232	0.48	0.019	MC3-SP-50-3
50	5	150	100	200	309	0.48	0.019	MC3-SP-50-5
63.5	3	177	113.5	150	227	0.54	0.024	MC3-SP-63.5-3
63.5	5	177	113.5	200	302	0.54	0.024	MC3-SP-63.5-5
80	3	210	130	150	228	0.62	0.029	MC3-SP-80-3
80	5	210	130	200	304	0.62	0.029	MC3-SP-80-5
100	3	250	150	150	229	0.71	0.036	MC3-SP-100-3
100	5	250	150	200	305	0.71	0.036	MC3-SP-100-5
125	3	300	175	150	229	0.83	0.044	MC3-SP-125-3
125	5	300	175	200	306	0.83	0.044	MC3-SP-125-5

**MC3-SP**
Gasdruckfeder

EINBAUVARIANTEN

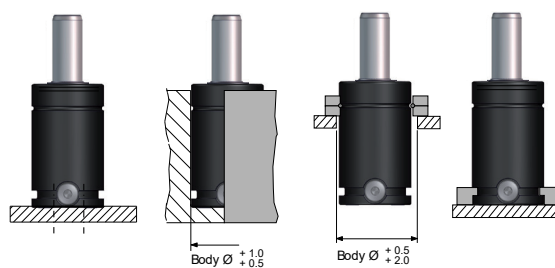

Druckmedium	N ₂
Max. Fülldruck (bei 20° C)	180 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 80 - 100
Instandhaltungsset	3016385