




TU-10000

Gasdruckfeder Standard Line



Grün
Blau
Rot
Gelb
Schwarz

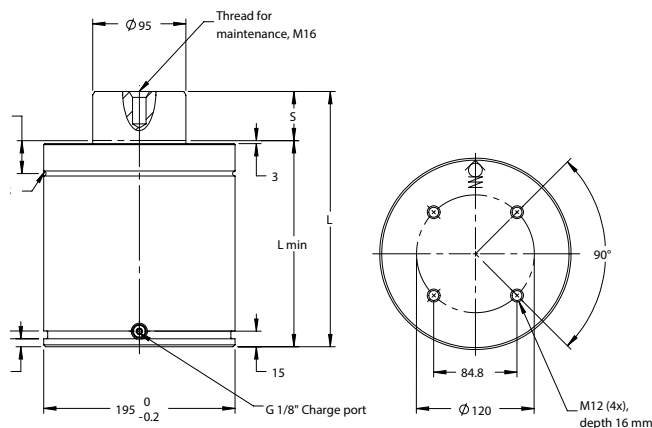


Norm: VDI 3003
T: < 80 °C

$S = \text{Hub}$

S1	S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
25	25	210	185	10600	13800	35.90	0.87	TU-10000-25
38	38.1	236.2	198.1	10600	14300	37.60	1.13	TU-10000-38
50	50	260	210	10600	14700	39.20	1.37	TU-10000-50
64	63.5	287	223.5	10600	15000	41.00	1.64	TU-10000-64
80	80	320	240	10600	15200	43.20	1.98	TU-10000-80
100	100	360	260	10600	15600	45.80	2.38	TU-10000-100
125	125	410	285	10600	15700	49.10	2.88	TU-10000-125
160	160	480	320	10600	15800	53.70	3.59	TU-10000-160
200	200	560	360	10600	16000	59.00	4.39	TU-10000-200
250	250	660	410	10600	16000	65.60	5.40	TU-10000-250
300	300	760	460	10600	16000	72.20	6.40	TU-10000-300

EINBAUVARIANTEN

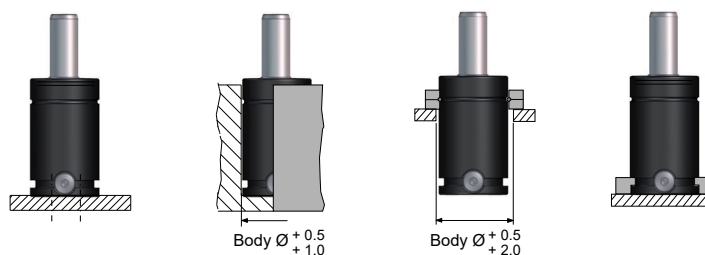

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 15 - 40
Instandhaltungsset	3019037