
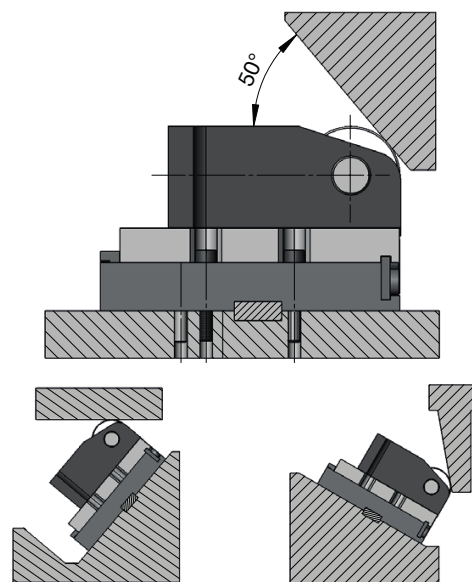


RC2

Rollenschiebereinheit

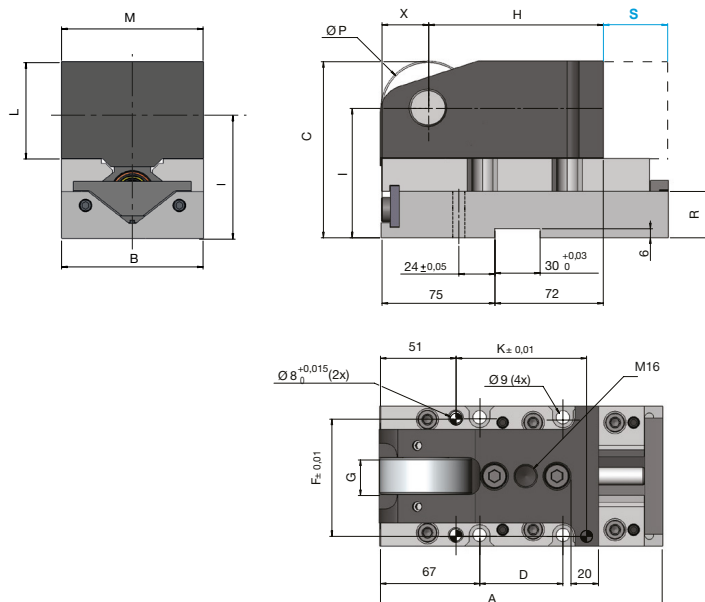

Max. Breite des Treibers = 36 mm

S - Hub

Type	S	A	B	C	D	F	G	H	I	K	L	M	P	R	X	Fi [daN]	F [daN]	GDF	Order No.
30	50	190	94	117	56	79	25	116	86	88	64	94	62	31	31	200	3000	M2-200	RC2-30-50
30	80	220	94	117	86	79	25	116	86	118	64	94	62	31	31	200	3000	M2-200	RC2-30-80
50	50	190	120	140	56	105	29	111	103	88	75	120	72	40	36	350	5000	X-350	RC2-50-50
50	80	220	120	140	86	105	29	111	103	118	75	120	72	40	36	350	5000	X-350	RC2-50-80
50	100	240	120	157	126	105	29	111	120	158	75	120	72	57	36	350	5000	X-350	RC2-50-100

Empfohlene max. Hube / min (bei 20° C)

40 spm

Max. Rollennockengeschwindigkeit

0,8 m/s

Max. Spiel an der Stirnseite der Stanzeinheit

0,02 mm

Pos.	Beschreibung
1	Treiber
2	Hochleistungs-Rollenlager
3	Montagebolzen
4	Sicherungsscheibe
5	Schieberkörper
6	Vordere Endplatte
7	Sicherungsring
8	Gasdruckfeder
9	Grundplatte
10	Rücklaufsperr

