




EPS3-16x1.5

Spring plunger



8

Type 5
(individual)

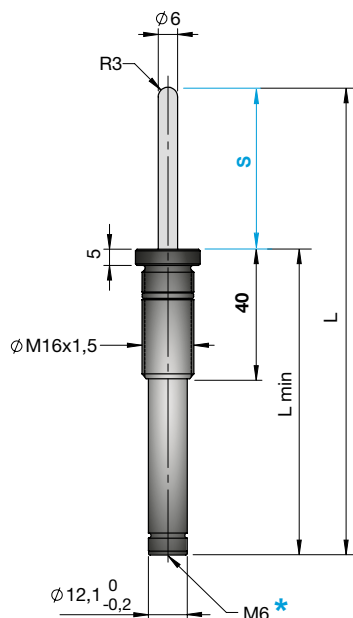


Norm: ISO 20928
VDI 3004

T: < 80 °C

S = stroke
* Charge port

S	Type	L ± 0.25	L min	bar	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
15	5	75	60	150	-	71.5	0.07	0.002	EPS3-16x1.5-15-5
60	5	165	105	150	-	71.5	0.09	0.005	EPS3-16x1.5-60-5

INSTALLATION VARIANTS

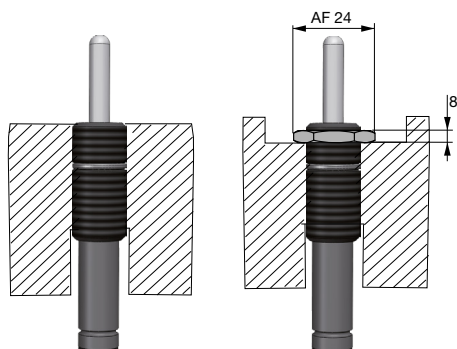

Technical information

Pressure medium	N ₂
Max. filling pressure (at 20° C)	150 bar
Min. filling pressure (at 20° C)	10 bar
Operating temperature	0 °C - 80 °C
Force increase by temperature	0,3 % / 1 °C
Max. piston rod velocity	1,6 m/s
Recommended max strokes / min (at 20° C)	~ 100
Repair kit	-