



TU-750


Gasdruckfeder Standard Line



Grün
Blau
Rot
Gelb
Schwarz




Norm: ISO 11901
T: < 80 °C

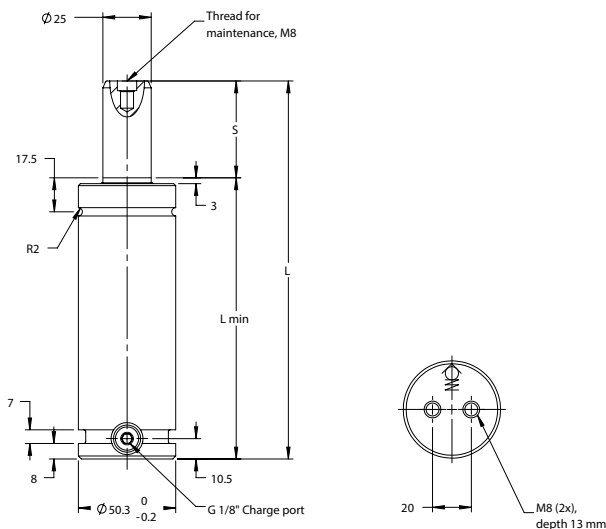

$S = \text{Hub}$

S1	S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
13	12.7	120.4	107.7	740	1200	1.33	0.030	TU-750-13
25	25	145	120	740	1200	1.44	0.040	TU-750-25
38	38.1	171.2	133.1	740	1200	1.57	0.060	TU-750-38
50	50	195	145	740	1200	1.68	0.070	TU-750-50
64	63.5	222	158.5	740	1200	1.78	0.090	TU-750-64
80	80	255	175	740	1200	1.94	0.11	TU-750-80
100	100	295	195	740	1200	2.13	0.14	TU-750-100
125	125	345	220	740	1210	2.37	0.17	TU-750-125
160	160	415	255	740	1210	2.70	0.21	TU-750-160
175	175	445	270	740	1210	2.84	0.23	TU-750-175
200	200	495	295	740	1210	3.08	0.26	TU-750-200
225	225	545	320	740	1210	3.32	0.29	TU-750-225
250	250	595	345	740	1210	3.55	0.33	TU-750-250
300	300	695	395	740	1210	4.03	0.39	TU-750-300

EINBAUVARIANTEN

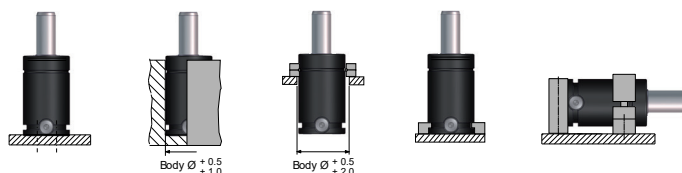

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 15 - 40
Instandhaltungsset	3019817