


**X-9500**

Gasdruckfeder Power Line

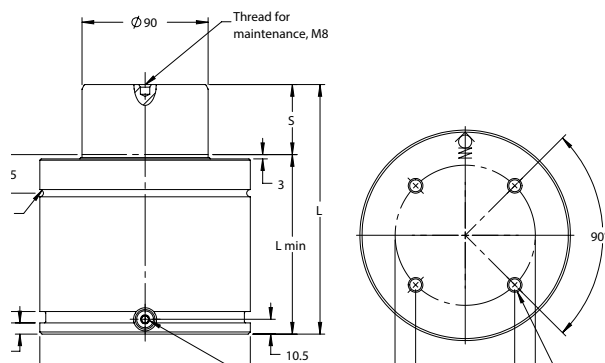


Grün
Blau
Rot
Gelb
Schwarz

 $S = \text{Hub}$

Norm: VDI 3003
T: < 80 °C

S	L ± 0.25	L min	F1 [daN]	F2 [daN]	m [kg]	V [L]	Order No.
19	116	97	9500	13500	9.86	0.49	X-9500-19
25	128	103	9500	13900	10.23	0.58	X-9500-25
32	142	110	9500	14200	10.67	0.70	X-9500-32
38	154	116	9500	14300	11.04	0.80	X-9500-38
50	178	128	9500	14600	11.79	0.99	X-9500-50
63	204	141	9500	14800	12.60	1.20	X-9500-63
75	228	153	9500	14900	13.35	1.39	X-9500-75
80	238	158	9500	15000	13.66	1.47	X-9500-80
100	278	178	9500	15100	14.91	1.79	X-9500-100
125	328	203	9500	15200	16.47	2.20	X-9500-125

EINBAUVARIANTEN

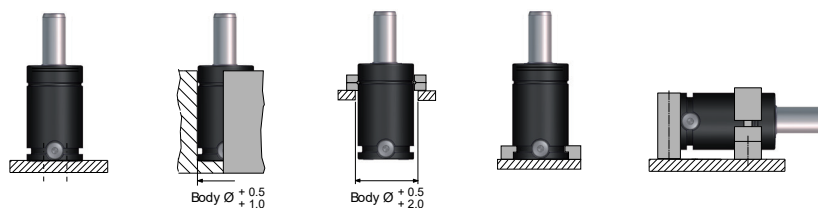

Druckmedium	N2
Max. Fülldruck (bei 20° C)	150 bar
Min. Fülldruck (bei 20° C)	25 bar
Betriebstemperatur	0° C - 80° C
Temperaturabhängige Druckerhöhung	0,3% / 1° C
Max. Kolbengeschwindigkeit	1,6 m/s
Empfohlene max Hübe / min (bei 20° C)	~ 30 - 100
Instandhaltungsset	3020614